

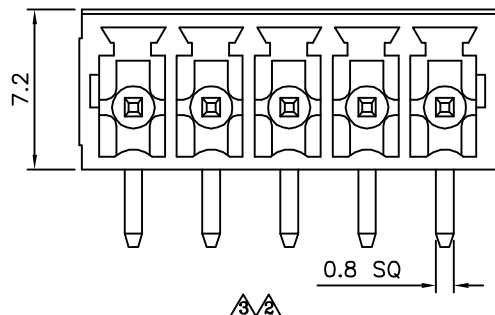


Recommended P.C.B. Layout

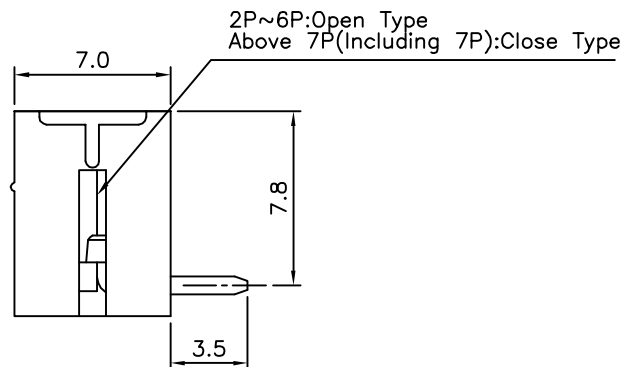

3/2

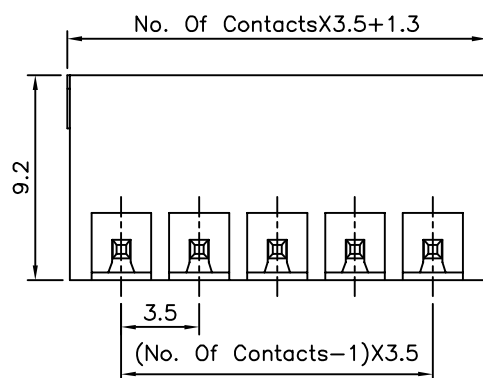

2P~6P:Open Type
Above 7P(Including 7P):Close Type

△ SPECIFICATION

Current Rating:12 Amp/Way Max.
Voltage Rating:300V AC
Withstanding Voltage:2500V AC For 1 Minute
Test Time=60 Sec/1 PCS
Operation Temperature:-40°C~+105°C
Soldering Reliability:Test Temperature=250°C±10°C
5 Seconds Max.

△△ Insulator Body(Housing):Polyamide+G.F.(UL94V-0),Black
Solder Pin:Copper Alloy,Tin Plated
RoHS Compliant

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.
07808

APPROVED BY
EMILY
CHECKED BY
HZF
DRAWING BY
HAO

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
X. ±0.50
.X ±0.30
.XX ±0.20
X* ±1°

NO.	REV.	REVISIONS	CHK	DATE
△	A4	Modify Data	HZF	09/04/2015
△	A3	Modify Data	HZF	05/31/2012
△	A2	Modify Data	HZF	11/23/2011
△	A1	Modify Data	HZF	07/30/2010
△	A0	NEW RELEASE	HZF	04/07/2009

SCALE NONE

REV. A4

UNIT mm

NO. REV. REVISIONS CHK DATE