
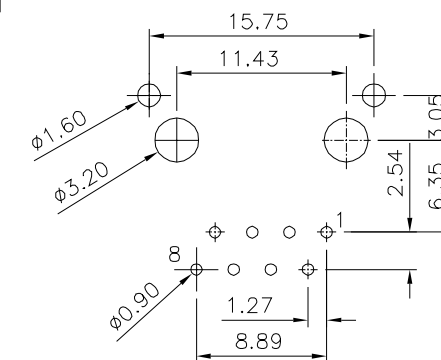


3.1 SPECIFICATION

Current Rating:1.5A Max.
Voltage Rating:150V AC Max.
Operating Temperature:-40°C~+85°C
Insulation Resistance:500 Megaohms Min. Initial
At 500V DC
Contact Resistance:20 Milliohms Max. Initial
Dielectric Withstanding Voltage:
1000V RMS. At 60Hz,1 Minute Between
Adjacent Contacts
1500V RMS. At 60Hz,1 Minute Between
Shield And Contacts
Housing:PBT+G.F.(UL94V-0),Black
Contacts:Phosphor Bronze
Gold Plated 06u" On Contact Area,
Gold Flash On Other Area,Over Nickel
Shield:Brass,Nickel Plated
Cavity Conforms To FCC Rules And
Regulations Part 68,Subpart F.
RoHS Compliant

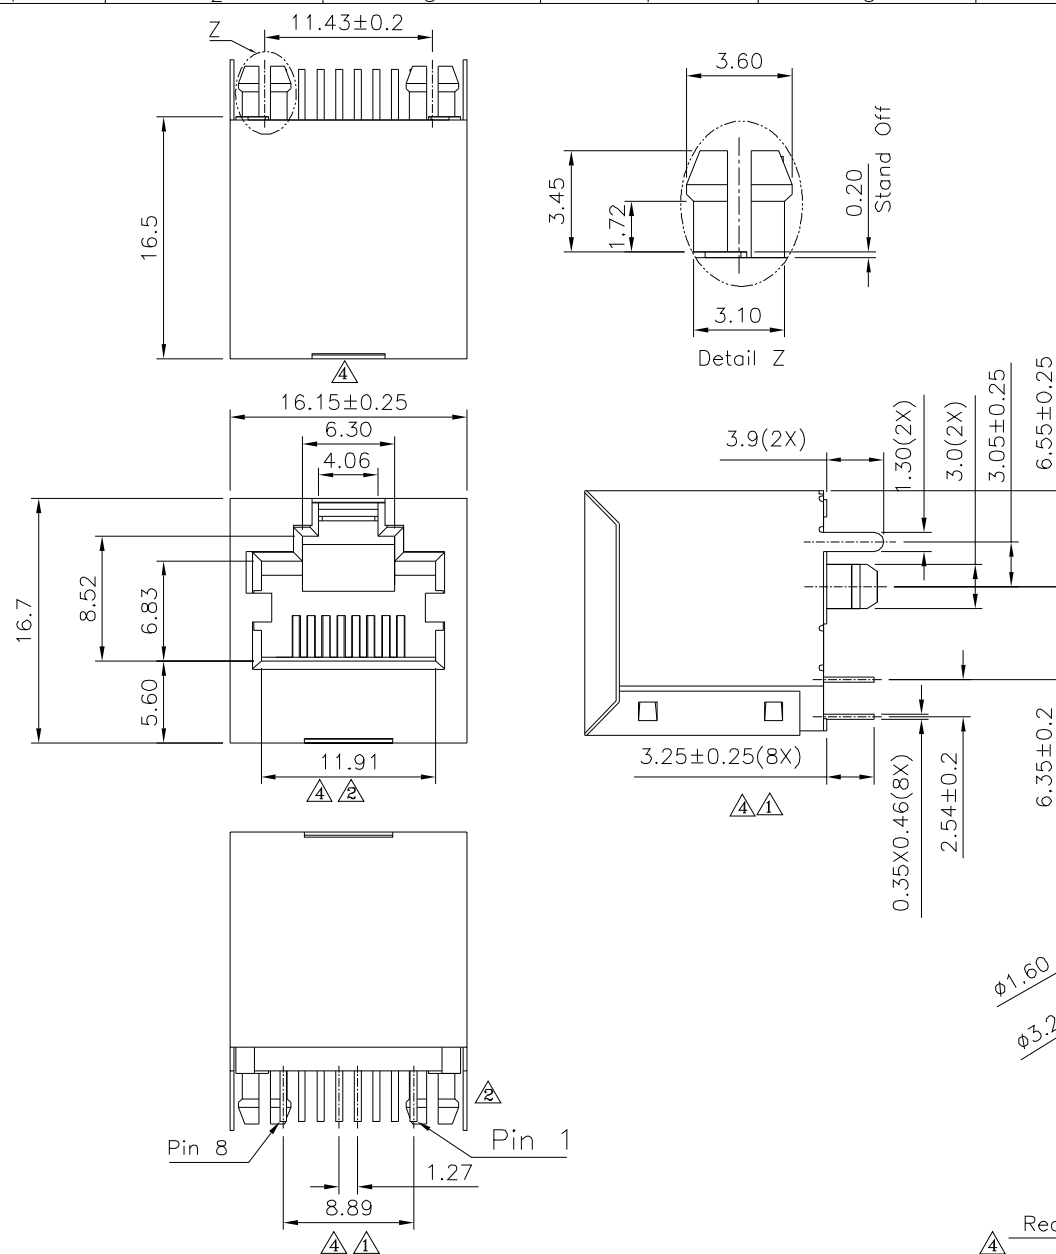

Recommended P.C.B. Layout (Top View)
Tolerance: ±0.05mm (T=1.6mm)

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. 1/2

08010

SCALE

NONE

APPROVED BY

MEI

CHECKED BY

HZF


DRAWING BY

CYP

REV.

B4

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
X ±0.25
.XX ±0.13
XXX ±0.05

UNIT
mm

NO. REV. REVISIONS

B4 Modify Data
B3 Modify Data
B2 Modify Data
B1 Modify Data
B0 NEW RELEASE

HZF 10/26/2021
HZF 08/24/2018
HZF 04/02/2014
HZF 08/26/2010
HZF 04/16/2007
CHK DATE