

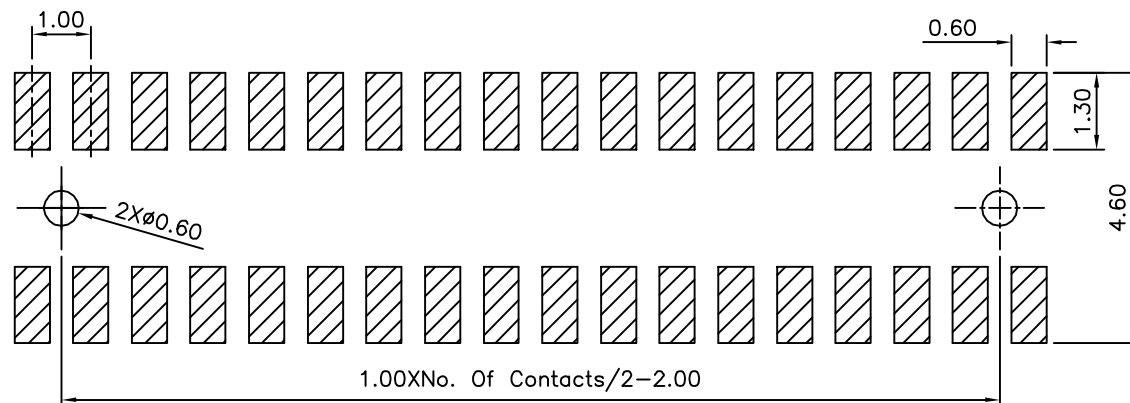



# SPECIFICATION

Current Rating:1.0 Amp  
 Withstand Voltage:500V AC/DC  
 Contact Resistance:20 Milliohms Max.  
 Insulation Resistance:1000 Megaohms Min.  
 Operation Temperature:-40°C~+105°C  
 Insulator:PA9T+30%G.F.(UL94V-0),Black  
 ⚠ Contact:Phosphor Bronze,Gold Plated Over Nickel  
 RoHS Compliant

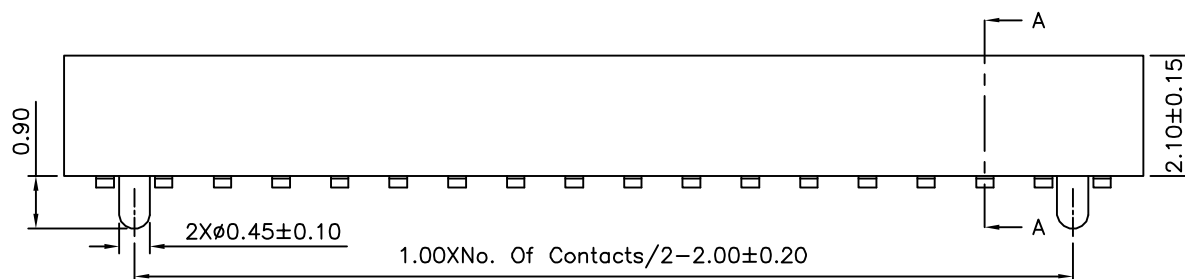

Recommended P.C.B. Layout(Top Side)  
 (PCB Board Tolerance±0.05)

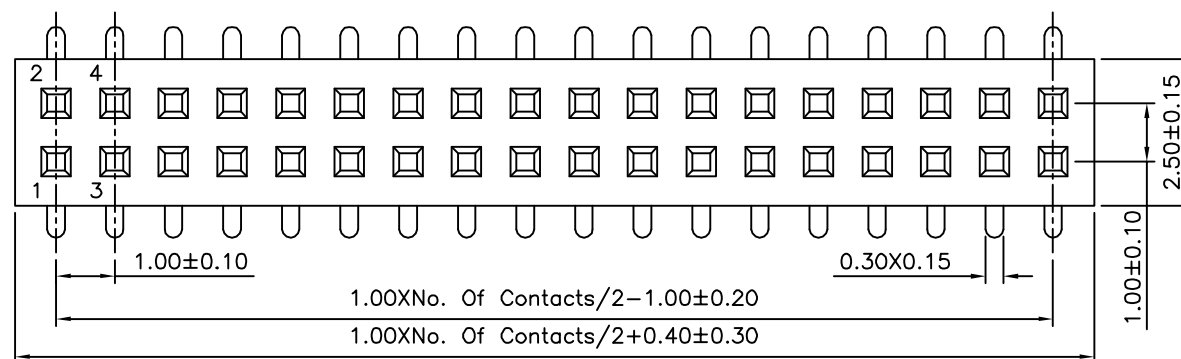

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.

08061

APPROVED BY

EMILY

CHECKED BY


HZF

DRAWING BY

SONG

UNLESS OTHERWISE  
 SPECIFIED  
 TOLERANCES ARE  
 .X ±0.40  
 .XX ±0.25  
 .XXX ±0.15  
 ANG. ±3°

UNIT  
 mm



SCALE

NONE

REV.

B1

NO. REV.

REVISIONS

CHK

DATE

⚠ B1 Modify Data HZF 11/22/2012

⚠ B0 NEW RELEASE HZF 09/26/2012