
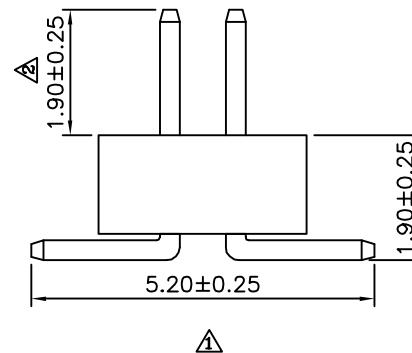
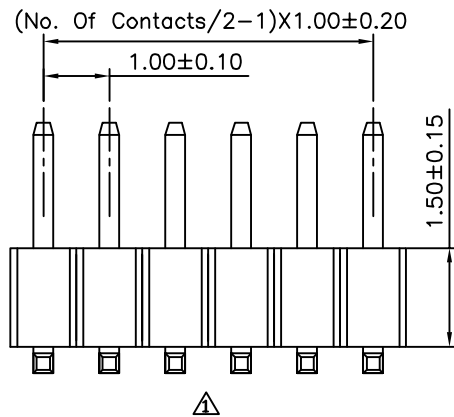
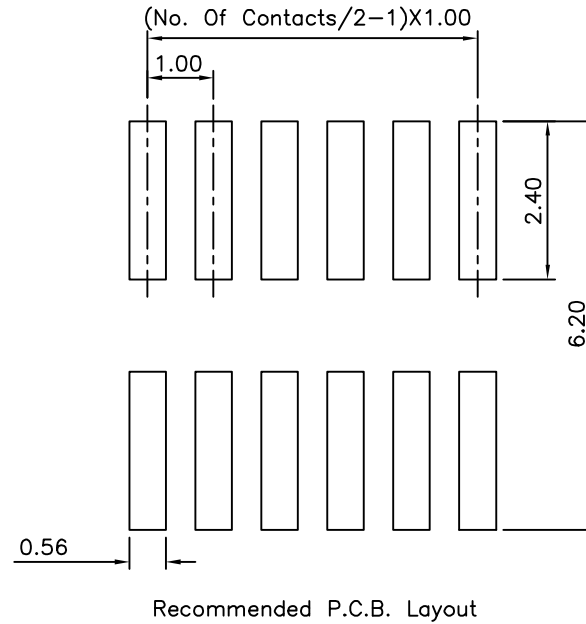


# △ SPECIFICATION

Current:1A  
 Operation Temperature:−55°C~+105°C  
 Contact Resistance:20 Milliohms Max.  
 Insulation Resistance:5000 Megaohms Min.  
 Dielectric Strength:1000V AC Minute  
 Housing:PA6T(UL94V−0),Black  
 △ Contact:Brass,Gold Flash Over Nickel  
 No. Of Contacts:04~100 Contacts  
 RoHS Compliant

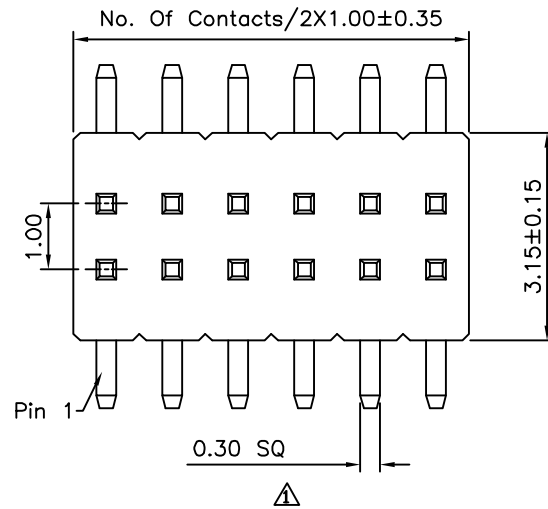

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.

08072

SCALE

NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY


SONG

REV.

A3

UNLESS OTHERWISE  
 SPECIFIED  
 TOLERANCES ARE  
 .X ±0.38  
 .XX ±0.25  
 ANG. ±5°

UNIT  
 mm



| NO. | REV. | REVISIONS    | CHK | DATE       |
|-----|------|--------------|-----|------------|
| △A3 |      | Modify Spec. | HZF | 04/24/2014 |
| △A2 |      | Modify Dim.  | HZF | 05/05/2012 |
| △A1 |      | Modify Data  | HZF | 03/14/2012 |
| △A0 |      | NEW RELEASE  | HZF | 06/27/2007 |