


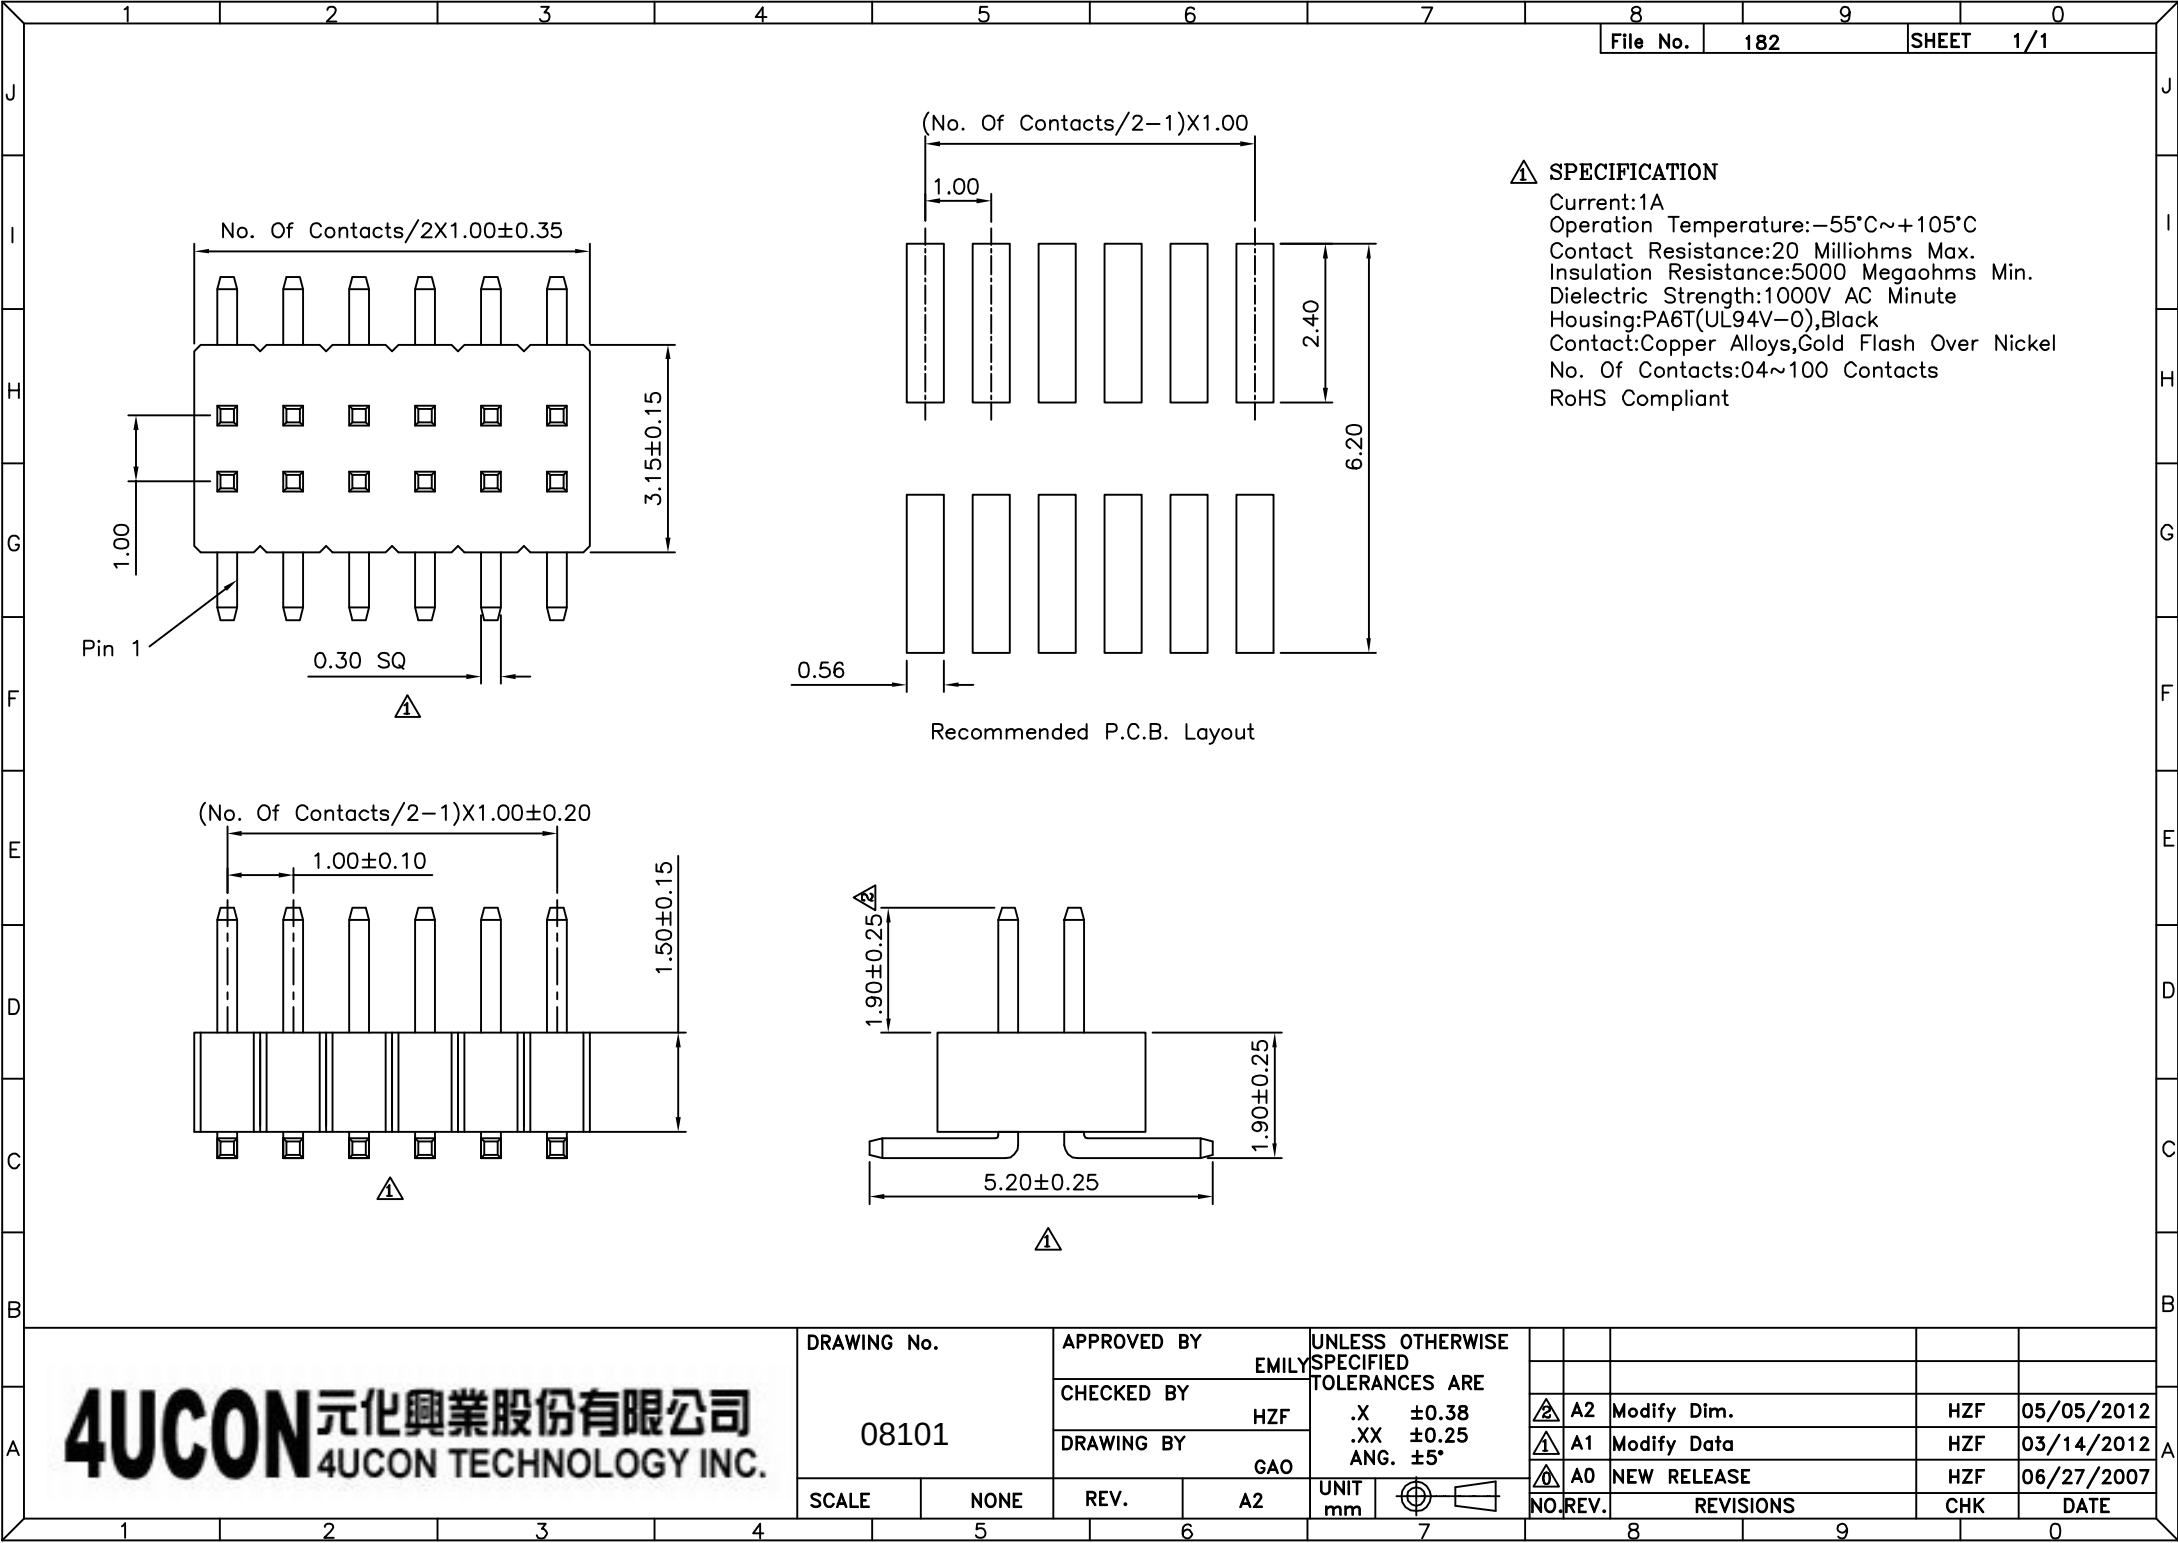

△ SPECIFICATION

Current:1A
Operation Temperature:-55°C~+105°C
Contact Resistance:20 Milliohms Max.
Insulation Resistance:5000 Megaohms Min.
Dielectric Strength:1000V AC Minute
Housing:PA6T(UL94V-0),Black
Contact:Copper Alloys,Gold Flash Over Nickel
No. Of Contacts:04~100 Contacts
RoHS Compliant

Recommended P.C.B. Layout

4UCON元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

08101

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

GAO

SCALE

NONE

REV.

A2


UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

.X ±0.38

.XX ±0.25

ANG. ±5°

UNIT
mm



NO.	REV.	REVISIONS	CHK	DATE
△	A2	Modify Dim.	HZF	05/05/2012
△	A1	Modify Data	HZF	03/14/2012
△	A0	NEW RELEASE	HZF	06/27/2007