



File No.	6970A26806	SHEET	1/1

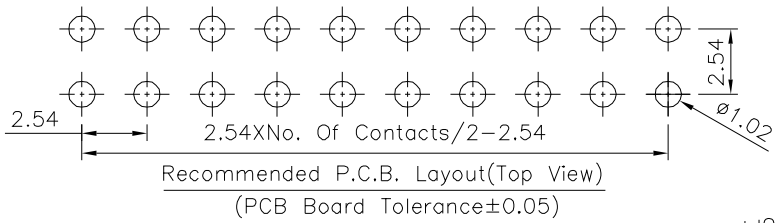

Recommended P.C.B. Layout(Top View)
(PCB Board Tolerance±0.05)

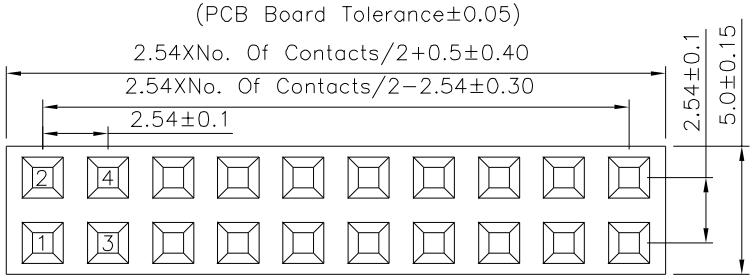

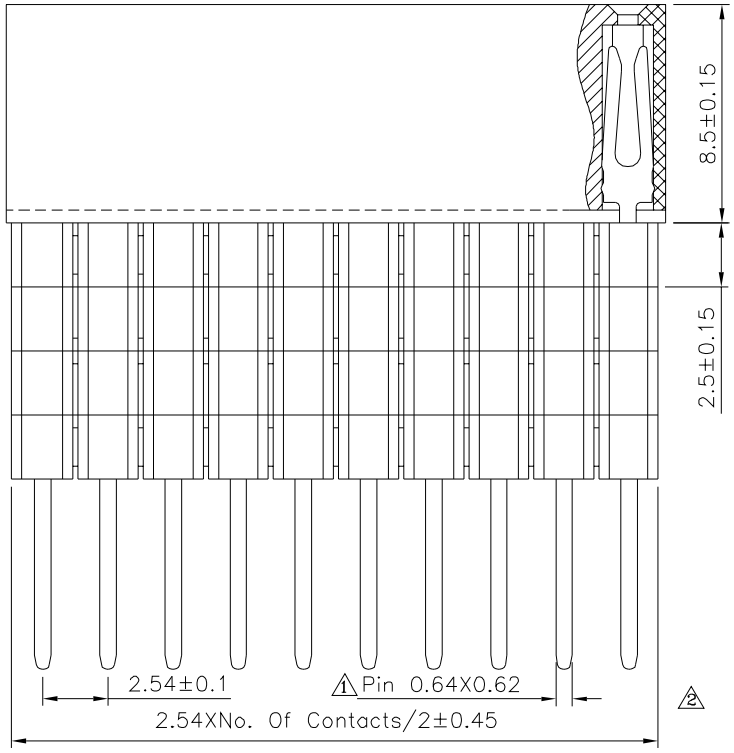

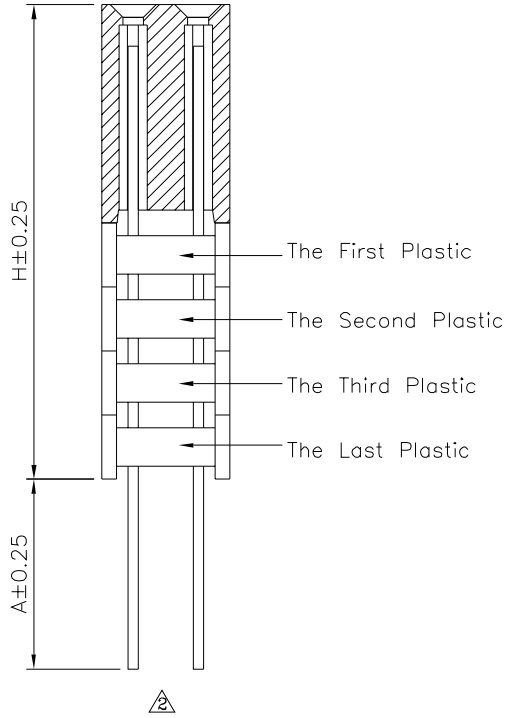

SPECIFICATION

Current Rating:3A
⚠2 Withstand Voltage:1000V AC Min./Minute
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operating Temperature:-40°C~+105°C
⚠1 Insulator:PA9T(UL94V-0),Black
Contact:Brass,Gold Flash Over Nickel
RoHS Compliant

Series no.	Plastic Q'ty	H	A
0196	1	11.00	2.30
0196	1	11.00	7.00
0196	1	11.00	12.30
0197	2	13.50	4.50
0197	2	13.50	9.80
0198	3	16.00	2.00
0198	3	16.00	7.30
0199	4	18.50	4.80

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.	08401		
APPROVED BY	EMILY		
CHECKED BY	HZF		
DRAWING BY	HAO		
SCALE	NONE	REV.	A2

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
⚠2 X. ±0.30 X.° ±2°
.X ±0.25 .X° ±1.5°
.XX ±0.20 .XX° ±1.0°
.XXX ±0.15 .XXX° ±0.5°
UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
⚠2	A2	Modify Data	HZF	01/26/2024
⚠1	A1	Modify Data	HZF	12/20/2023
⚠0	A0	NEW RELEASE	HZF	05/03/2014