


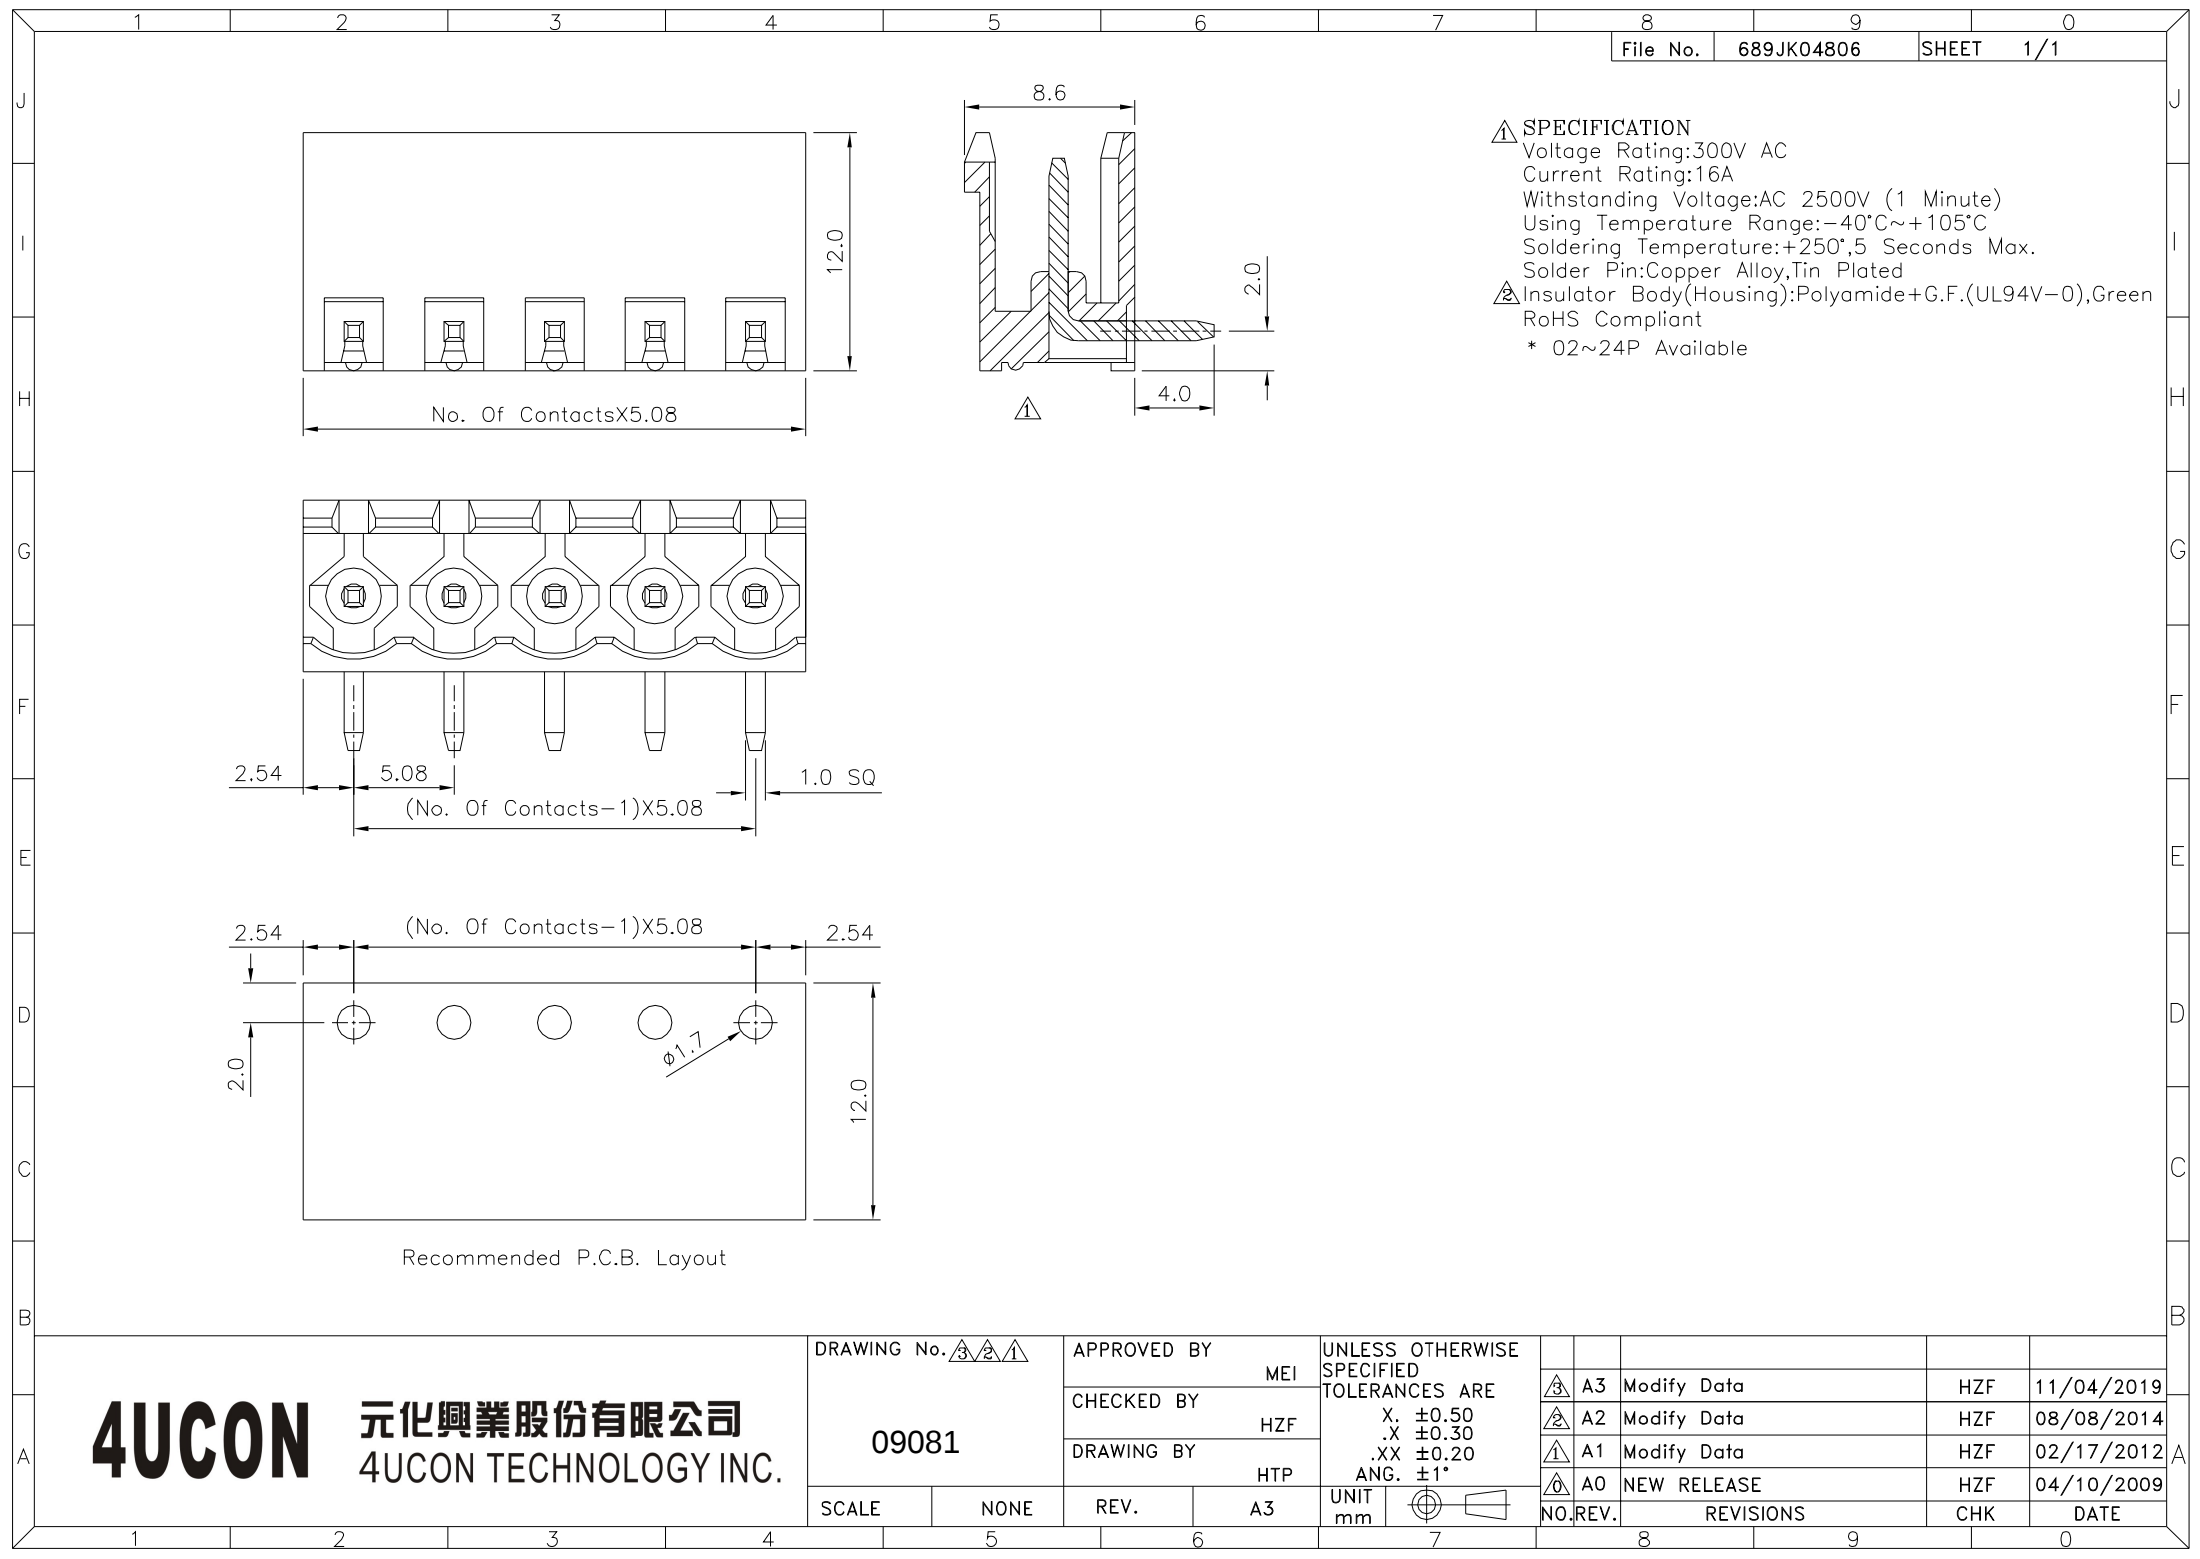

⚠ **SPECIFICATION**
Voltage Rating:300V AC
Current Rating:16A
Withstanding Voltage:AC 2500V (1 Minute)
Using Temperature Range:-40°C~+105°C
Soldering Temperature:+250°,5 Seconds Max.
Solder Pin:Copper Alloy,Tin Plated
⚠ Insulator Body(Housing):Polyamide+G.F.(UL94V-0),Green
RoHS Compliant
* 02~24P Available

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. <u>3</u> / <u>2</u> / <u>1</u>		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.50 .X ±0.30 .XX ±0.20 ANG. ±1°						
		MEI				<u>3</u>	A3	Modify Data	HZF	11/04/2019
		CHECKED BY				<u>2</u>	A2	Modify Data	HZF	08/08/2014
		HZF				<u>1</u>	A1	Modify Data	HZF	02/17/2012
		DRAWING BY				<u>1</u>	A0	NEW RELEASE	HZF	04/10/2009
		HTP				<u>1</u>	A0	NEW RELEASE	HZF	04/10/2009
SCALE	NONE	REV.	A3	UNIT	mm		NO. REV.	REVISIONS	CHK	DATE