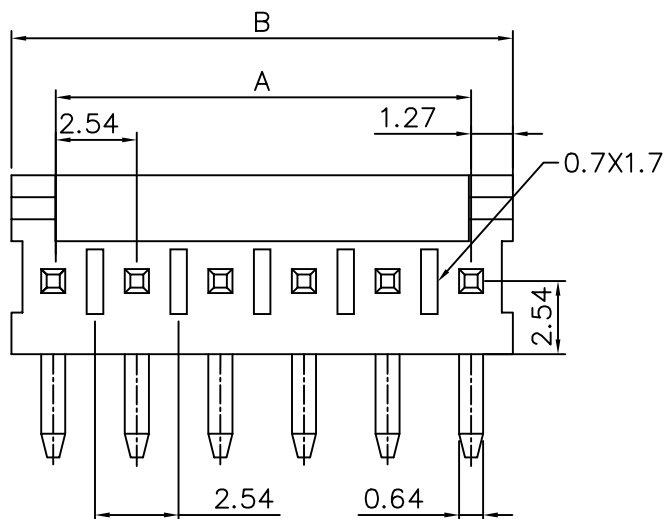


Recommended PCB Layout

SPECIFICATIONS

Current Rating: 2A AC/DC

Voltage Rating: 250V AV/DC



Insulation: Nylon UL94V-2

Contact: Copper Alloy 0.64mm Square Pin

Tin-Plating Or Gold Flash

Poles: 2-28

Circuits	A	B
2	2.54	5.08
3	5.08	7.62
4	7.62	10.16
5	10.16	12.70
6	12.70	15.24
7	15.24	17.78
8	17.78	20.32
9	20.32	22.86
10	22.86	25.40
11	25.40	27.94
12	27.94	30.48
13	30.48	33.02
14	33.02	35.56
15	35.56	38.10
16	38.10	40.64
17	40.64	43.18
18	43.18	45.72
19	45.72	48.26
20	48.26	50.80
21	50.80	53.34
22	53.34	55.88
23	55.88	58.42
24	58.42	60.96
25	60.96	63.50
26	63.50	66.04
27	66.04	68.58
28	68.58	71.12

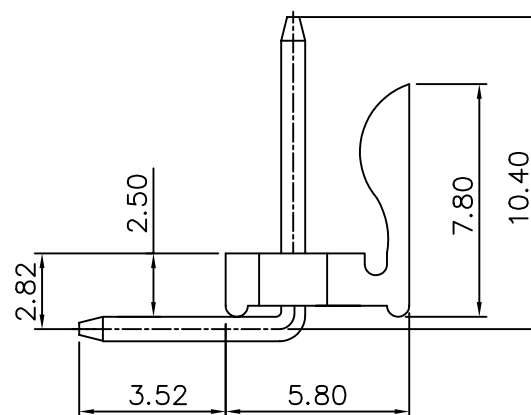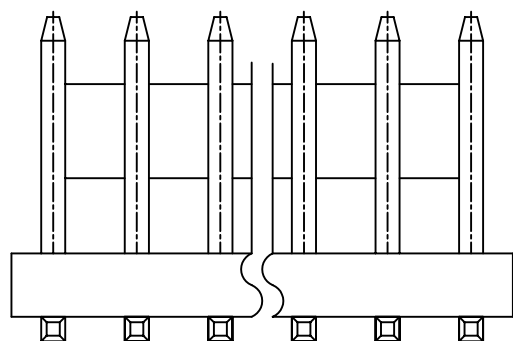

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

09478

APPROVED BY

MEI

CHECKED BY

RAN

DRAWING BY

HZF

UNLESS OTHERWISE
SPECIFIED

TOLERANCES ARE


.X ±0.38

.XX ±0.25

AWG.

UNIT

mm



AREA

REVISIONS

CHK

DATE

SCALE

NONE

REV.

A