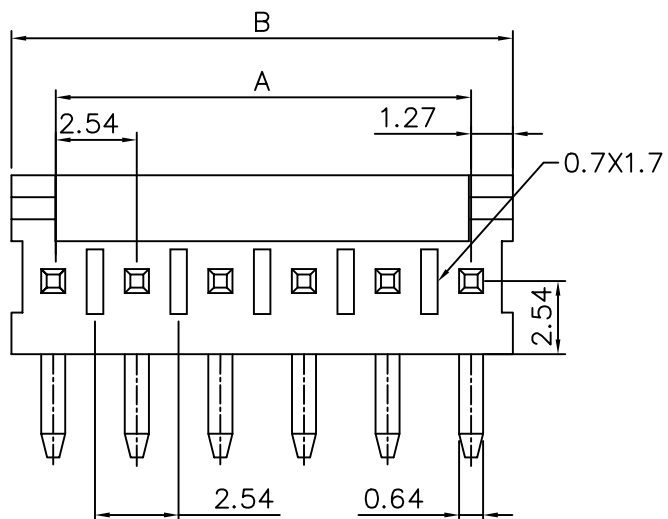


Recommended PCB Layout

### SPECIFICATIONS

Current Rating: 2A AC/DC

Voltage Rating: 250V AV/DC



Insulation: Nylon UL94V-2

Contact: Copper Alloy 0.64mm Square Pin

Tin-Plating Or Gold Flash

Poles: 2-28

| Circuits | A     | B     |
|----------|-------|-------|
| 2        | 2.54  | 5.08  |
| 3        | 5.08  | 7.62  |
| 4        | 7.62  | 10.16 |
| 5        | 10.16 | 12.70 |
| 6        | 12.70 | 15.24 |
| 7        | 15.24 | 17.78 |
| 8        | 17.78 | 20.32 |
| 9        | 20.32 | 22.86 |
| 10       | 22.86 | 25.40 |
| 11       | 25.40 | 27.94 |
| 12       | 27.94 | 30.48 |
| 13       | 30.48 | 33.02 |
| 14       | 33.02 | 35.56 |
| 15       | 35.56 | 38.10 |
| 16       | 38.10 | 40.64 |
| 17       | 40.64 | 43.18 |
| 18       | 43.18 | 45.72 |
| 19       | 45.72 | 48.26 |
| 20       | 48.26 | 50.80 |
| 21       | 50.80 | 53.34 |
| 22       | 53.34 | 55.88 |
| 23       | 55.88 | 58.42 |
| 24       | 58.42 | 60.96 |
| 25       | 60.96 | 63.50 |
| 26       | 63.50 | 66.04 |
| 27       | 66.04 | 68.58 |
| 28       | 68.58 | 71.12 |

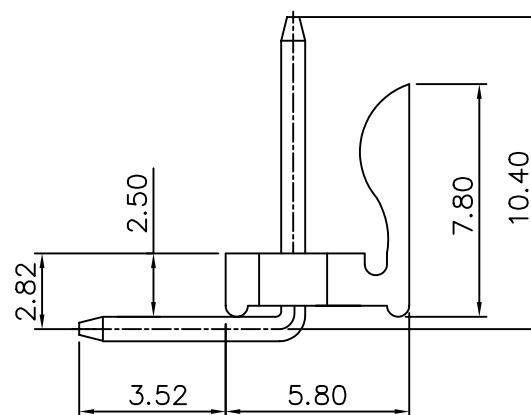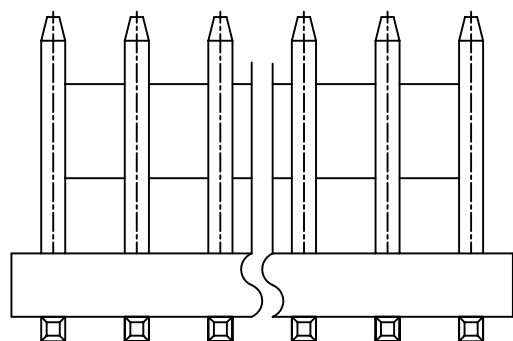

**4UCON** 元化興業股份有限公司  
4UCON TECHNOLOGY INC.

DRAWING No.

09483

APPROVED BY

MEI

CHECKED BY

RAN

DRAWING BY

HZF

UNLESS OTHERWISE SPECIFIED

TOLERANCES ARE


.X ±0.38

.XX ±0.25

AWG.

UNIT

mm



AREA

REVISIONS

CHK

DATE