



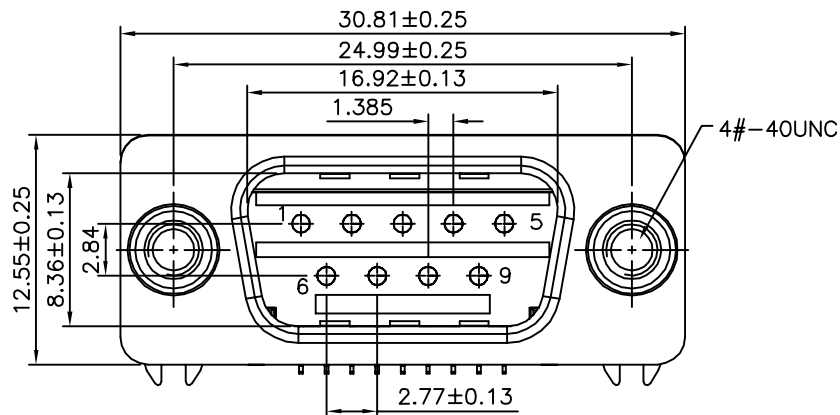


△△

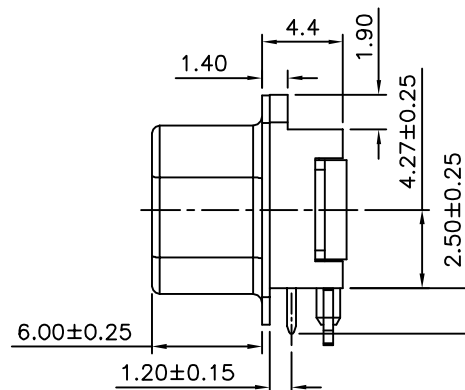


△△

△ SPECIFICATION


Current Rating:3 Ampere Per Contact
 Voltage:250V AC(RMS) Max.
 Dielectric Withstand Voltage:500V AC(RMS)
 Contact Resistance:25 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Operation Temperature Range:-55°C~+85°C
 Total Mating Force:4.0 kgf Max.
 Total Unmating Force:1.0 kgf Min.
 Housing:PBT(UL94V-0),Black
 Contact:Brass,Gold Flash On Contact Area,
 Tin Plated On Solder Tails,Over Nickel
 Shell:SPCC,Nickel Plated
 Boardlock:Copper Alloy,Tin Plated
 Rivet:Copper Alloy,Nickel Plated
 RoHS Compliant

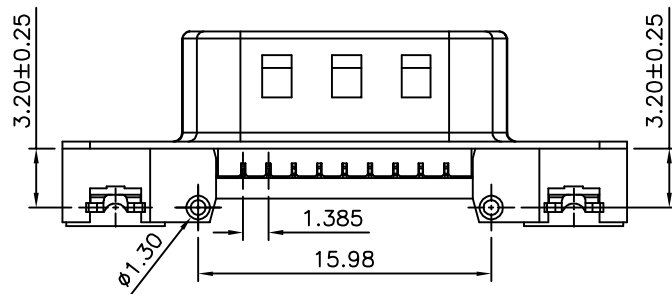


△△

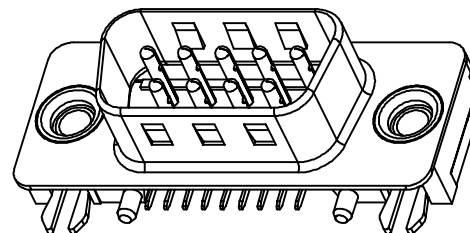

△

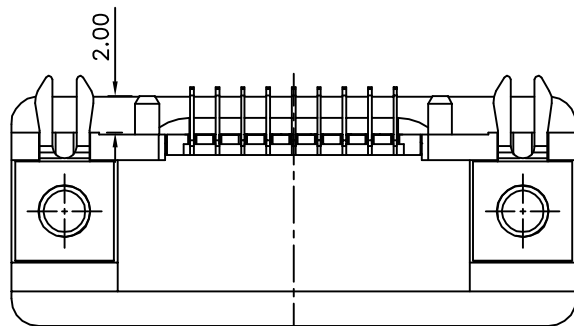

△△

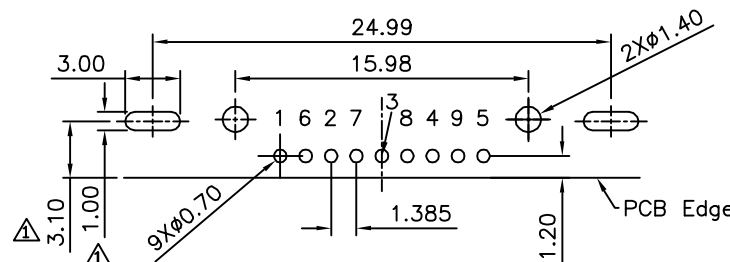

△ Recommended P.C.B. Layout

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

09767

SCALE NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY


SONG

REV.

A3

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE
 .XX ±0.25
 .XXX ±0.13
 ANG. ±2°

UNIT



NO.	REV.	REVISIONS	CHK	DATE
△	A3	Modify Data	HZF	07/30/2012
△	A2	Modify Data	HZF	03/25/2010
△	A1	Modify Data	HZF	12/04/2009
△	A0	NEW RELEASE	HZF	07/09/2007