
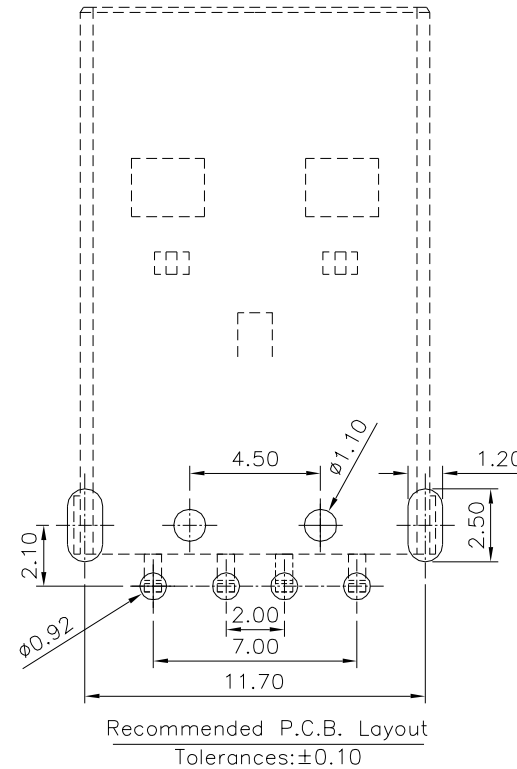


△ SPECIFICATION

△ Current Rating: 1.5A Max.
 Dielectric Withstanding Voltage: 30V AC For 1 Minute
 Insulation Resistance: 1000 Megaohms Min. At DC 500V
 Contact Resistance: 30 Milliohms Max.
 Temperature Range: -55°C ~ +105°C
 RoHS Compliant

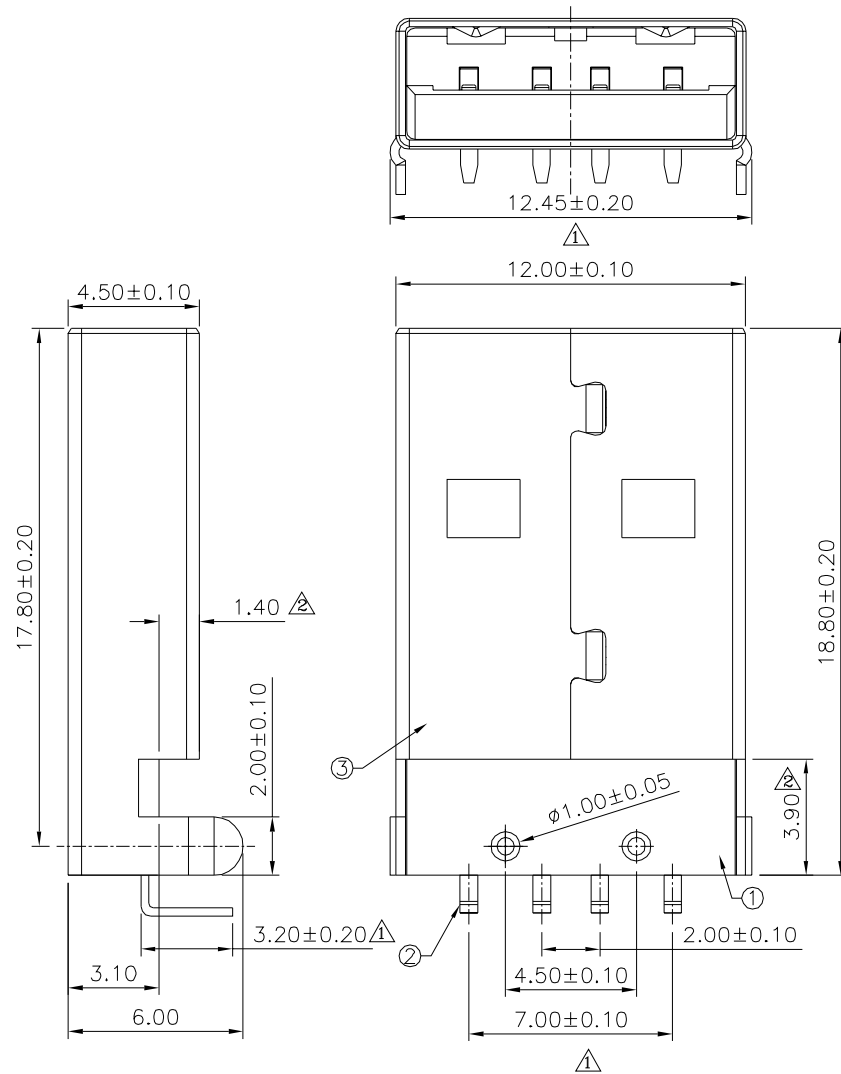

③	Shell	1	Cold Rolled Steel	Nickel Plated Over Copper
②	Contact	4	Brass	Gold Flash On Contact Area, Tin Plated On Solder Tails, Over Nickel
①	Housing	1	PBT (UL94V-0)	White
△	No. Description	Q'ty	Material	Remark

DRAWING No. △△

APPROVED BY
Jason Wu

CHECKED BY
Leo Han

DRAWING BY
Michelle Lee


10016

SCALE NONE

REV. B2

UNIT mm

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
 .X ±0.30
 .XX ±0.20
 .XXX ±0.10
 ANG. ±1°



△	B2	Modify Data	HZF	09/11/2025
△	B1	Modify Data	HZF	11/13/2017
△	B0	Modify Data	HZF	09/22/2010
△	B0	NEW RELEASE	HZF	09/22/2010
NO. REV.	REVISIONS		CHK	DATE

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.