
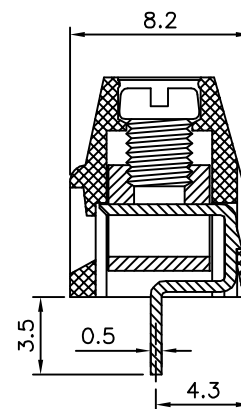
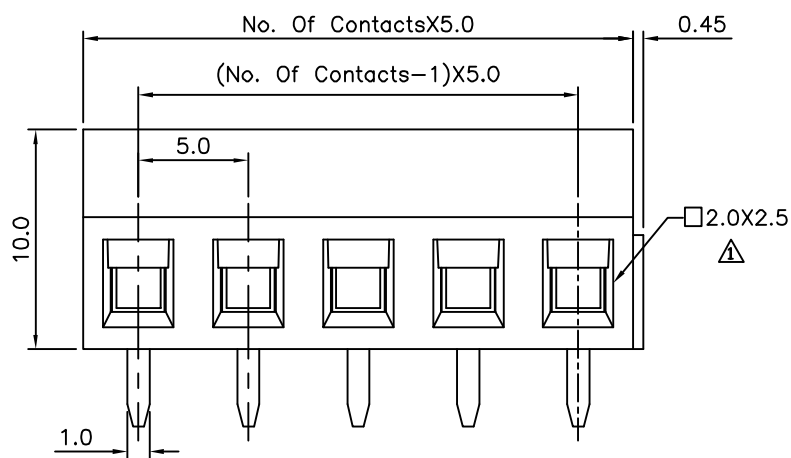


Recommended P.C.B. Layout

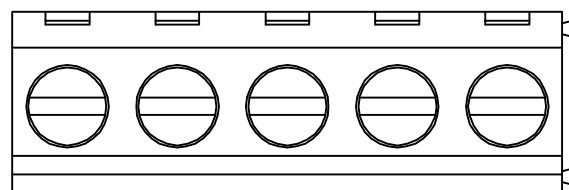

△ SPECIFICATION

Current Rating:16 Amp/Way Max.
 Voltage Rating:300V AC
 Contact Resistance:20 Milliohms Max.
 Operation Temperature:-40°C~+105°C
 Soldering Reliability:Test Temperature:
 250°C±10°C/5s Max.
 Withsanding Voltage:2500V AC(1 Minute)
 Test Time=60s/1 PCS
 △Wire Range:16~30 AWG
 △Torque:4.5 Kgf.cm/M3.0
 Insulating Body(Housing):Polyamide(UL94V-0),Green
 △△Contact(Metal Housing):Copper Alloy,Nickel Plated
 Solder Pin:Copper Alloy,Tin Plated
 Terminal Screw:Steel,Galvanized With Cr3+ Plated
 RoHS Compliant

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

10028

SCALE

NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

CYP

REV.

A4

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE
 X. ±0.50
 .X ±0.30
 .XX ±0.20
 ANG. ±1°

UNIT
 mm



△ A4

Modify Data

HZF

12/04/2014

△ A3

Modify Data

HZF

06/14/2013

△ A2

Modify Data

HZF

12/15/2011

△ A1

Modify Data

HZF

09/13/2011

△ A0

NEW RELEASE

HZF

11/13/2009

NO. REV.

REVISIONS

CHK

DATE