

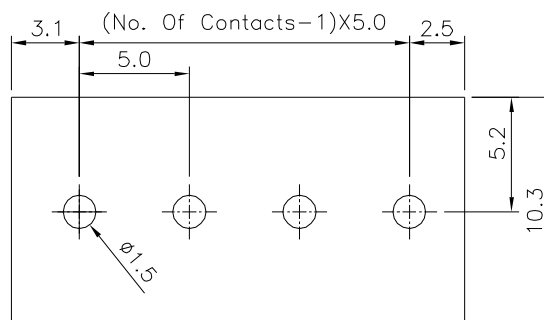


SPECIFICATION

Voltage Rating:300V AC
Current Rating:16A/Way Max.
Contact Resistance:20 Milliohms Max.
Withstanding Voltage:2500V AC/Minute
Wire Range:12~30 AWG
Torque:4.5 Kgf.cm/M3.0
Operation Temperature:-40°C~+105°C
Contact:Copper Alloy,Nickel Plated
Screw:Steel,Galvanized With Cr3+ Plated
Solder Pin:Copper Alloy,Tin Plated
Insulator:Polyamide(UL94V-0),Green
RoHS Compliant

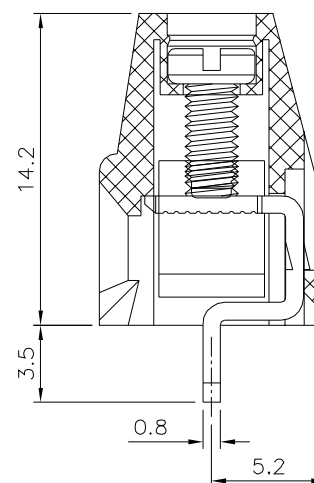

Recommended P.C.B. Layout

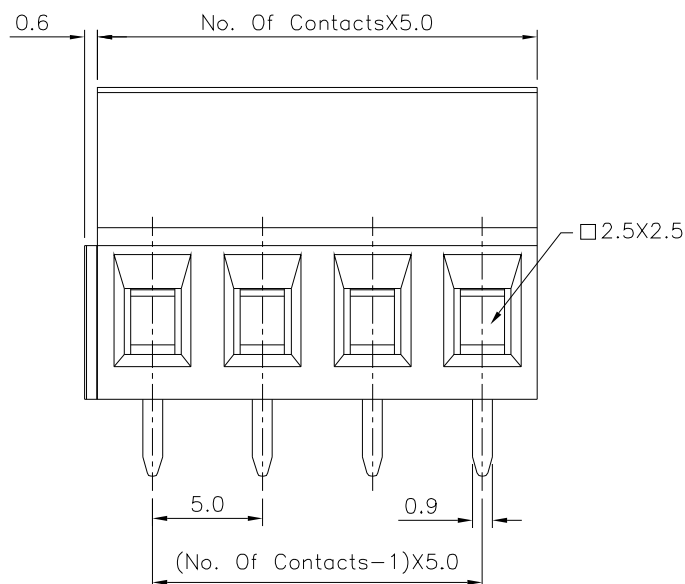

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

10040

SCALE

NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

YBL

REV.

B0

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
X. ± 0.50
.X ± 0.30
.XX ± 0.20
ANG. $\pm 1^\circ$

UNIT
mm



NO. REV.

REVISIONS

CHK

DATE

B0

Modify Data

HZF

10/24/2023

B0

NEW RELEASE

HZF

10/24/2023