

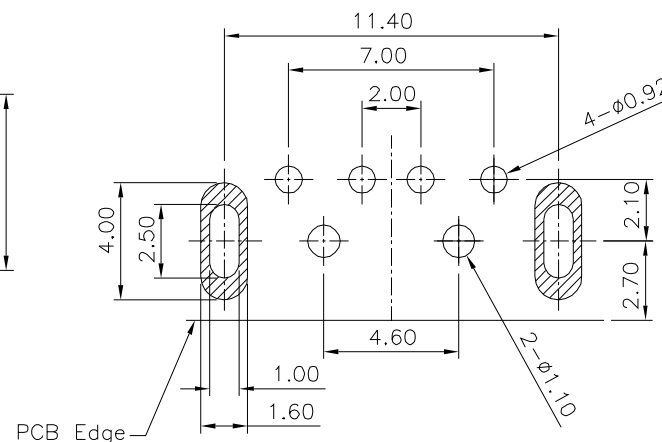
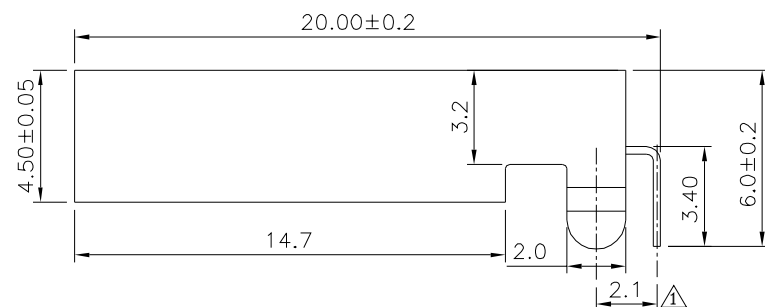
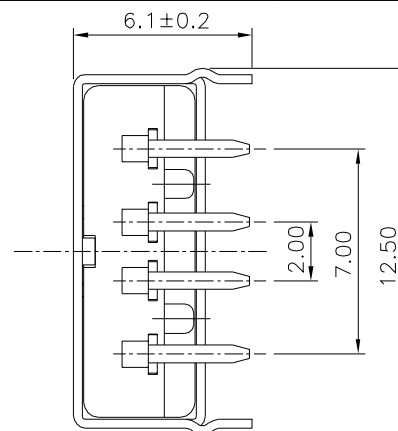


SPECIFICATION

Current Rating:1 Amps
 Withstand Voltage:500V AC
 Contact Resistance:30 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Operation Temperature:0°C~+50°C
 Housing:PBT
 Shell:Steel,Nickel Plated Over All
 Contact:Brass,Gold Flash On Contact Area,Tin
 Plated On Solder Tails,Over Nickel
 RoHS Compliant

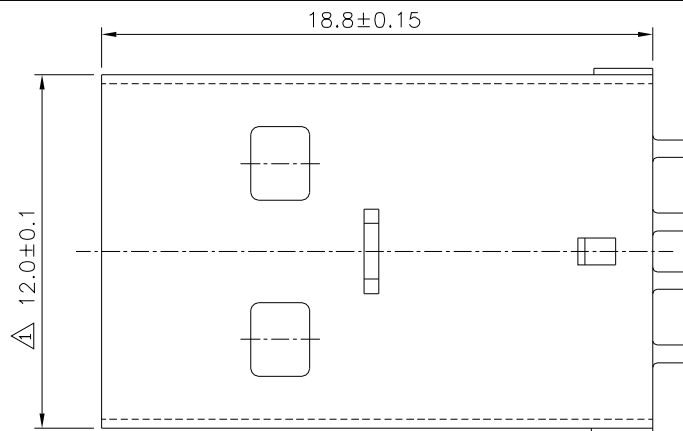

Recommended P.C.B. Layout

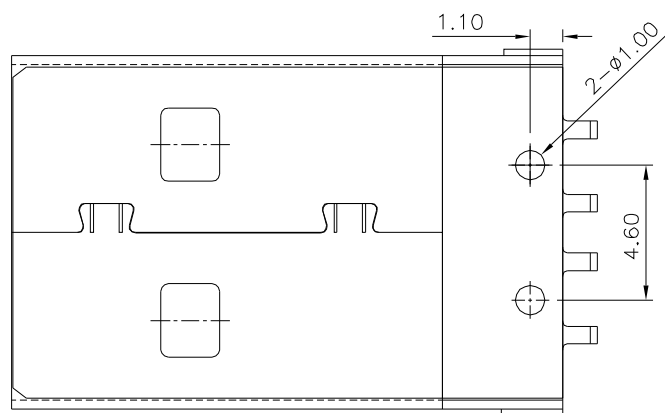

Insulator Color	Item No.
White	10088
Black	10089

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

10088

SCALE

NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

CYP

REV.

A3

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE

.X ±0.3

.XX ±0.2

UNIT mm



A3

Modify Data

HZF

09/25/2025

A2

Modify Data

HZF

04/23/2022

A1

Modify Data

HZF

01/16/2021

A0

NEW RELEASE

HZF

07/21/2015

NO. REV.

REVISIONS

CHK

DATE