



△△ SPECIFICATION


Contact Current Rating:0.5 Amp
 Withstand Voltage:500V AC
 Contact Resistance:35 Milliohms Max.
 Insulation Resistance:>500 Megaohms Min.
 Operation Temperature:-55°C~+85°C
 Insulator:PBT(UL94V-0),Black
 Contact:Phosphor Bronze,
 Selective Gold Plated 5u" Over Nickel
 Front Shell:Steel,Nickel Plated Over Copper
 Back Shell:Zinc Alloy,Nickel Plated Over Copper
 Flat Screws:Steel,Nickel Plated Over Copper
 Cable Clipper:Steel,Nickel Plated Over Copper
 Jackscrews:Steel,Nickel Plated Over Copper
 RoHS Compliant

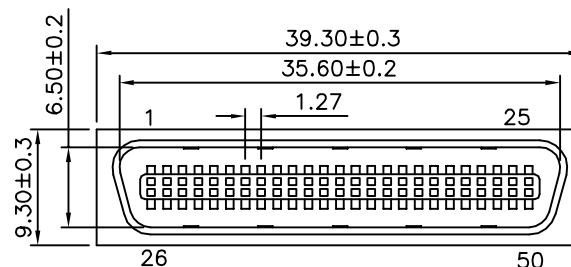


△

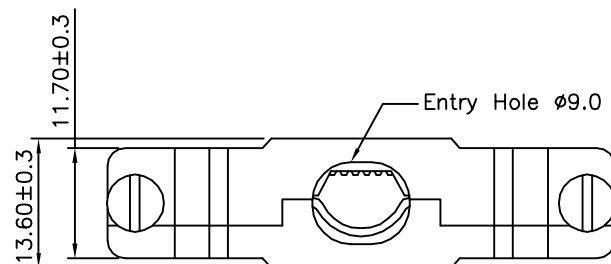


△

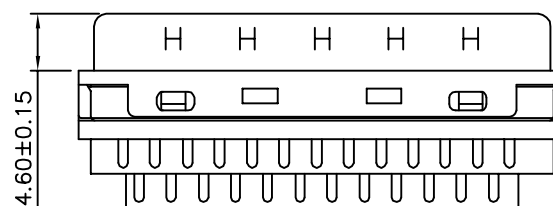


△




△

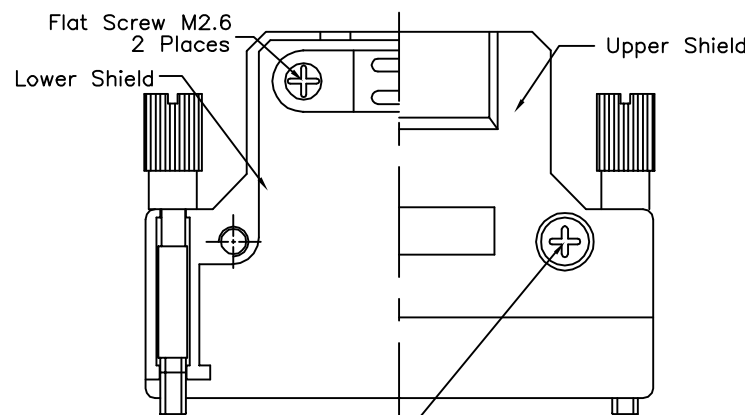

△△

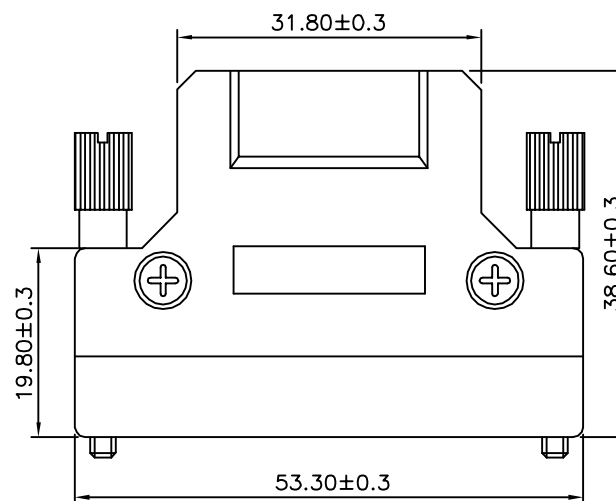

△

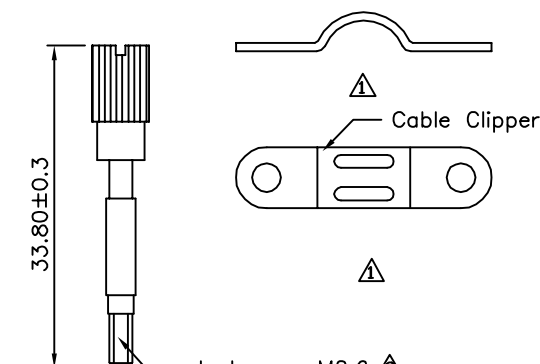

△

DRAWING No.

10128

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

GAO

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE
 .X ±0.38
 .XX ±0.25
 ANG.

UNIT
 mm



SCALE

NONE

REV.

A2

NO. REV.

REVISIONS

CHK

DATE

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

△ A2	Modify Data	HZF	05/06/2013
△ A1	Modify Data	HZF	01/11/2010
△ A0	NEW RELEASE		