

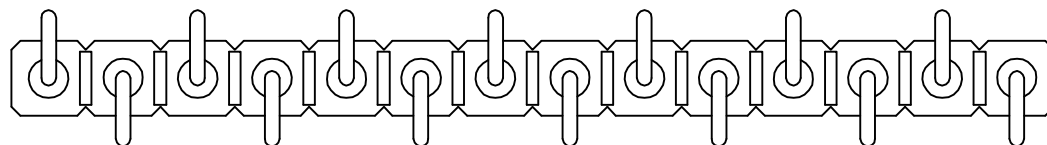
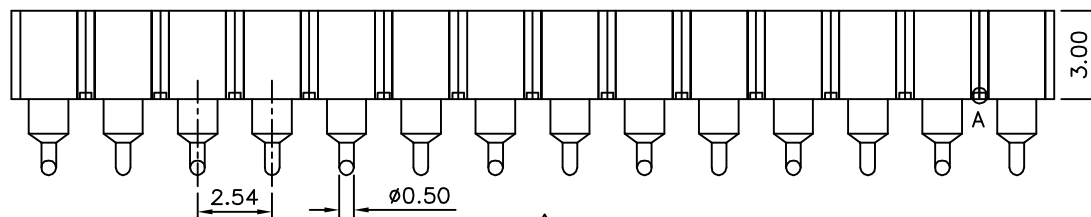
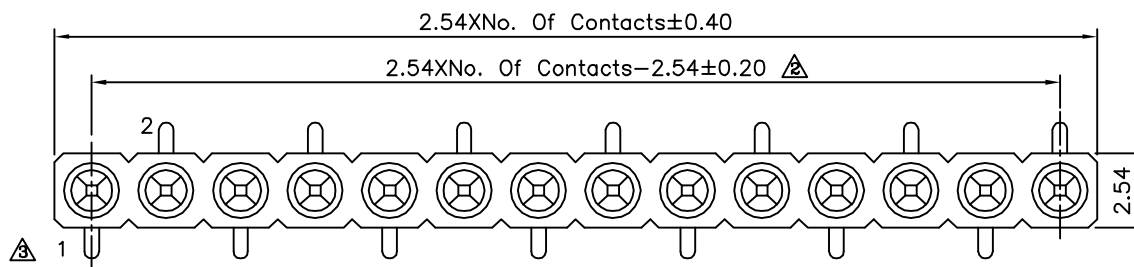


△ Recommended P.C.B. Layout



△ SPECIFICATION

Current Rating:3 Amps/Contact Max.
 Contact Resistance:4 Milliohms/Contact Max.
 Insulation Resistance:1000 Megaohms Min. At 100V
 Operation Voltage:60V AC/DC
 Average Insertion Force With Steel Pin Of
 Ø0.43mm:<250g
 Average Withdrawal Force With Steel Pin Of
 Ø0.43mm:>90g Min.
 Mechanical Life Cycle:200 Min.
 Operation Temperature:Gold Plated:-55°C~+105°C
 Tin Plated:-40°C~+105°C
 Soldering Temperature:+260°C,10s Max.
 △ Pin(Outer Sleeve):Brass,Tin Plated Over Nickel
 Clip(Contact 4 Finger):Beryllium Copper,Heat Treated
 Gold Plated Over Nickel
 Insulator(Housing):PPS(UL94V-0),Black
 RoHS Compliant



△ Detail:A

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

10211

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

SONG

SCALE

NONE


REV.

A3

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE

X. ±0.50
 .X ±0.30
 .XX ±0.20
 .XXX ±0.10
 ANG. ±5°

UNIT
 mm



NO.	REV.	REVISIONS	CHK	DATE
△ A3		Modify Data	HZF	08/28/2012
△ A2		Modify Data	HZF	03/10/2011
△ A1		Modify Data	HZF	01/14/2010
△ A0		NEW RELEASE	HZF	07/10/2006