

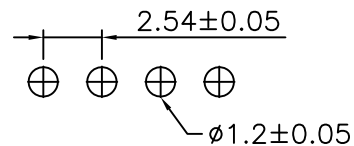
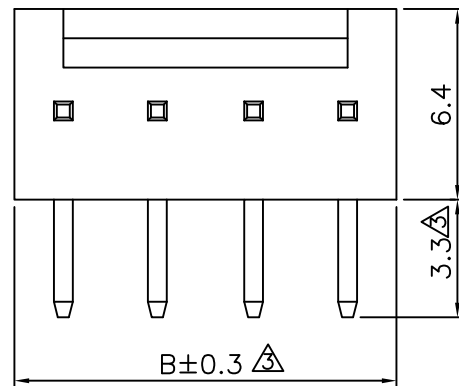


## SPECIFICATIONS

- △ Current Rating: 3A AC, DC  
Voltage Rating: 250V AC, DC  
Withstanding Voltage: 1500V AC/Minute  
Ambient Temperature Range: -40°C To +105°C  
Features: 2~20 Circuits Available  
Insulator: Nylon 66, UL94V-0  
Pin: Brass, Tin Plated  
Standard Color: Brown

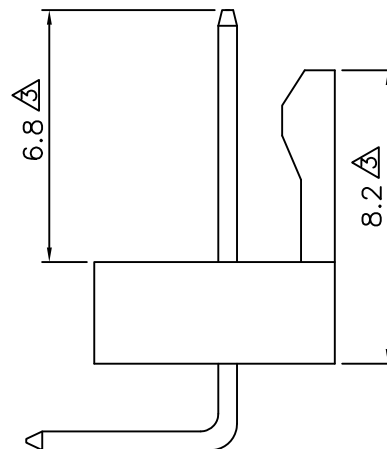

P.C.Board Hole Dimensions

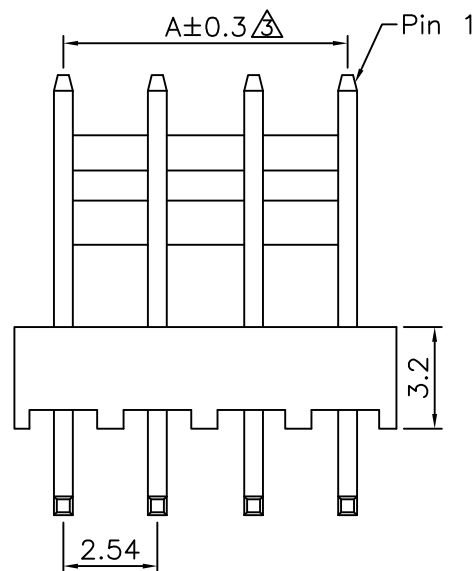

| Circuits | Dimensions |       |
|----------|------------|-------|
|          | A          | B     |
| 2P       | 2.54       | 5.08  |
| 3P       | 5.08       | 7.62  |
| 4P       | 7.62       | 10.16 |
| 5P       | 10.16      | 12.70 |
| 6P       | 12.70      | 15.24 |
| 7P       | 15.24      | 17.78 |
| 8P       | 17.78      | 20.32 |
| 9P       | 20.32      | 22.86 |
| 10P      | 22.86      | 25.40 |
| 11P      | 25.40      | 27.94 |
| 12P      | 27.94      | 30.48 |
| 13P      | 30.48      | 33.02 |
| 14P      | 33.02      | 35.56 |
| 15P      | 35.56      | 38.10 |
| 16P      | 38.10      | 40.64 |
| 17P      | 40.64      | 43.18 |
| 18P      | 43.18      | 45.72 |
| 19P      | 45.72      | 48.26 |
| 20P      | 48.26      | 50.80 |

**4UCON** 元化興業股份有限公司  
4UCON TECHNOLOGY INC.

DRAWING No.

10596

APPROVED BY

MEI

CHECKED BY

BECKY

DRAWING BY

HZF

SCALE

NONE

REV.


A2

UNLESS OTHERWISE  
SPECIFIED  
TOLERANCES ARE

.X ±0.25

.XX ±0.15

.XXX ±0.05

UNIT  
mm

|      |      |
|------|------|
| NO.  | REV. |
| △ A2 |      |
| △ A2 |      |
| △ A1 |      |
| △ A0 |      |

|                          |       |            |
|--------------------------|-------|------------|
| Modify Dim               | HZF   | 09/24/2007 |
| Update Specifications    | HZF   | 09/24/2007 |
| Modify Dim. 29.7 → 27.94 | MEI   | 2004/04/23 |
| NEW RELEASE              | BECKY | 2004/02/26 |
| REVISIONS                | CHK   | DATE       |

|       |            |
|-------|------------|
| HZF   | 09/24/2007 |
| HZF   | 09/24/2007 |
| MEI   | 2004/04/23 |
| BECKY | 2004/02/26 |
| CHK   | DATE       |