



△△ SPECIFICATION

Current Rating: 3 Amp
 Voltage Rating: 250V AC/RMS 60Hz
 Contact Resistance: 20 Milliohms
 Insulation Resistance: 1000 Megohms At 500V DC
 Dielectric Withstanding Voltage: 1000V AC/RMS 60Hz For 1 Minute
 Insulator: PBT+30%G.F.(UL94V-0), Black
 Contact: Brass, Gold Plated On Contact Area, Tin
 Plated On Solder Tails, Over Nickel
 Shell: Steel, Tin Plated Over Copper
 Boardlock: Brass, Tin Plated
 RoHS Compliant

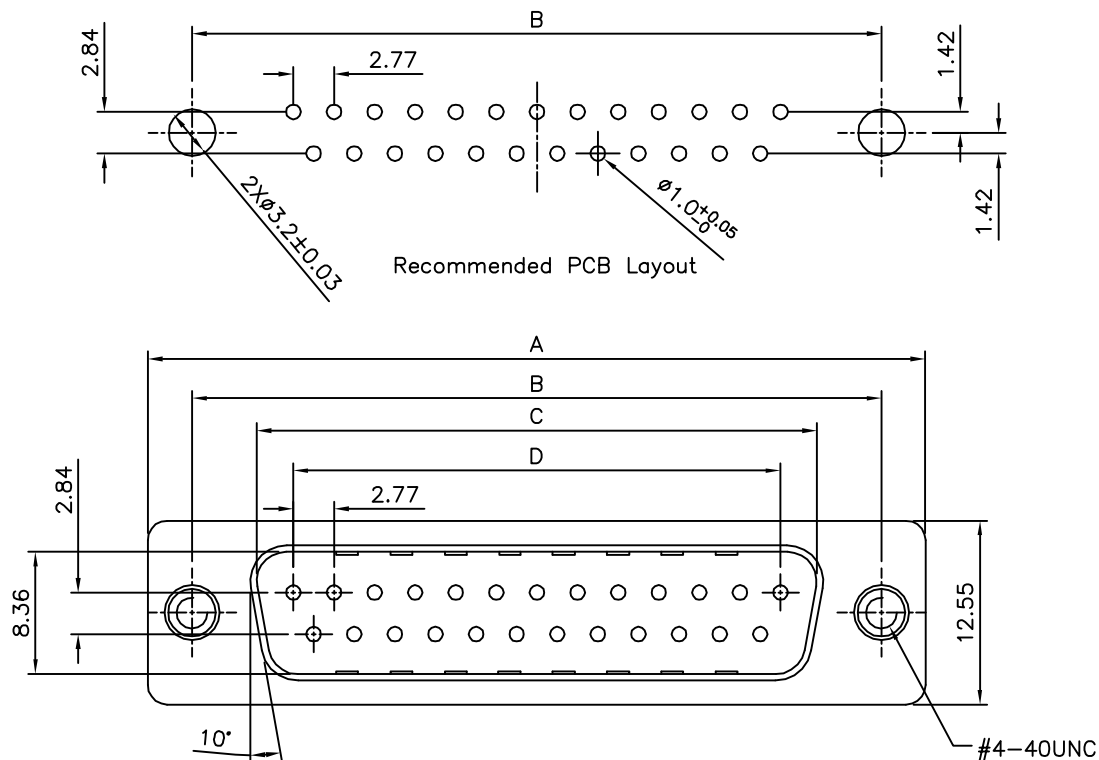

△ Pin	A	B	C	D
9	30.81	24.99	16.92	11.08
15	39.20	33.30	25.25	19.39
25	53.05	47.04	38.96	33.24
37	69.40	63.50	55.42	49.86

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

10626

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

CYP

SCALE

NONE

REV.

B2

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE

X. ±0.38 X.* ±3°
 .X ±0.25 .X* ±1.0°
 .XX ±0.13

UNIT
 mm



NO.	REV.	REVISIONS	CHK	DATE
△ B2		Modify Data	HZF	11/18/2014
△ B1		Modify Spec.	INGRID	11/22/2007
△ B0		NEW RELEASE	SHIN	02/07/2007