




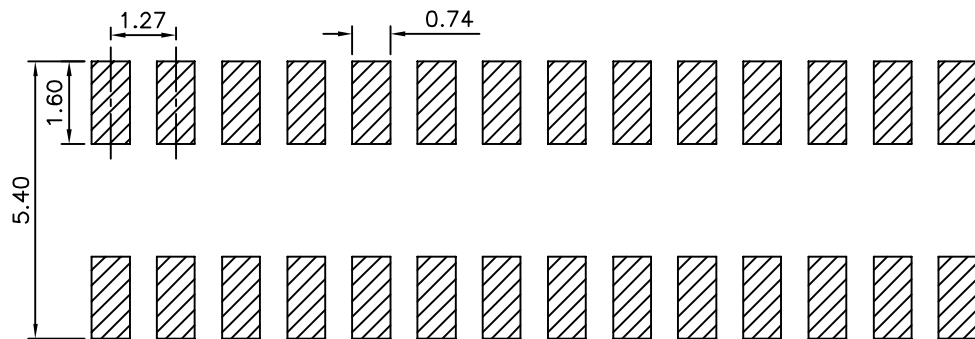


△ Recommended P.C.B Layout(Top Side)
(PCB Board Tolerance:±0.05)

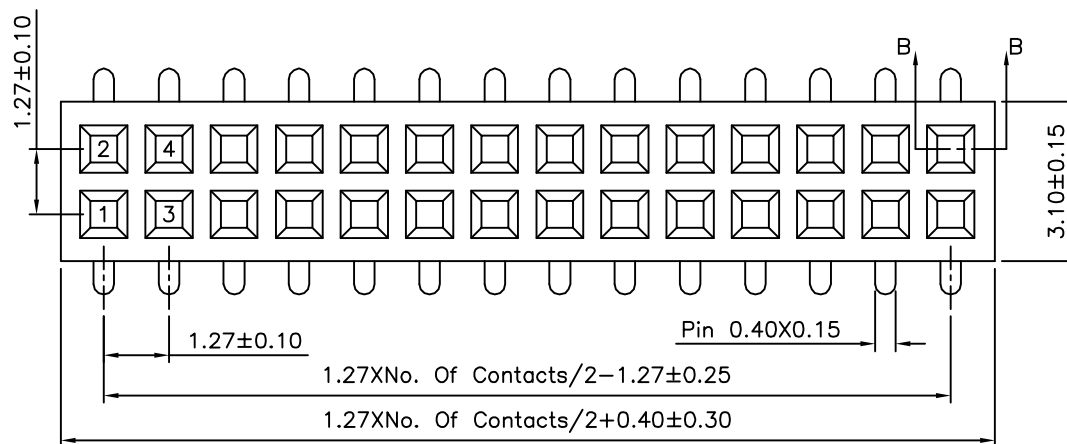

△

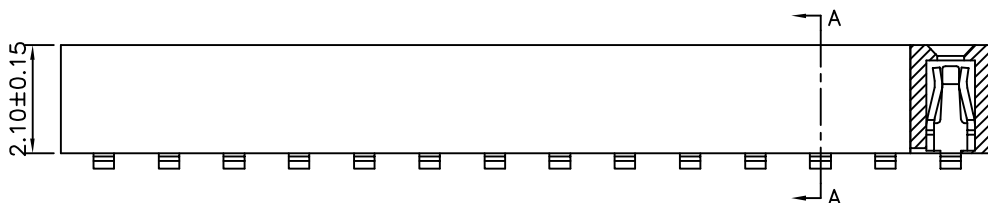

Section B-B



△ Section A-A

△ SPECIFICATION

Current Rating:1.0 Amp
Withstand Voltage:500V AC/DC
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:-40°C~+105°C
Contact:Phosphor Bronze,Gold Plated Over Nickel
△ Insulator:PA9T+30%G.F.(UL94V-0),Black
RoHS Compliant

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

10806

SCALE

NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY


YBL

REV.

A4

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
△ .X ±0.40
.XX ±0.25
.XXX ±0.15
ANG. ±3°

UNIT
mm



△ A4	Modify Data	HZF	11/11/2013
△ A3	Modify Spec.	HZF	02/26/2013
△ A2	Add P/N Code	HZF	07/17/2012
△ A1	Modify Data	HZF	03/18/2010
△ A0	NEW RELEASE	BECKY	03/25/2005
NO. REV.	REVISIONS	CHK	DATE