




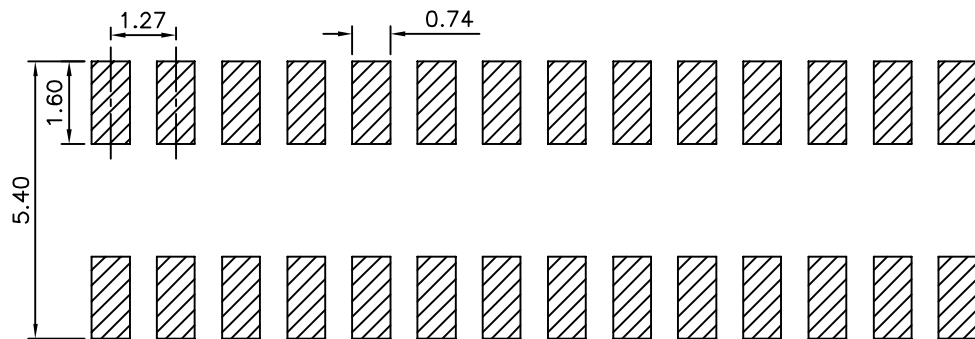


△ Recommended P.C.B Layout(Top Side)
(PCB Board Tolerance:±0.05)

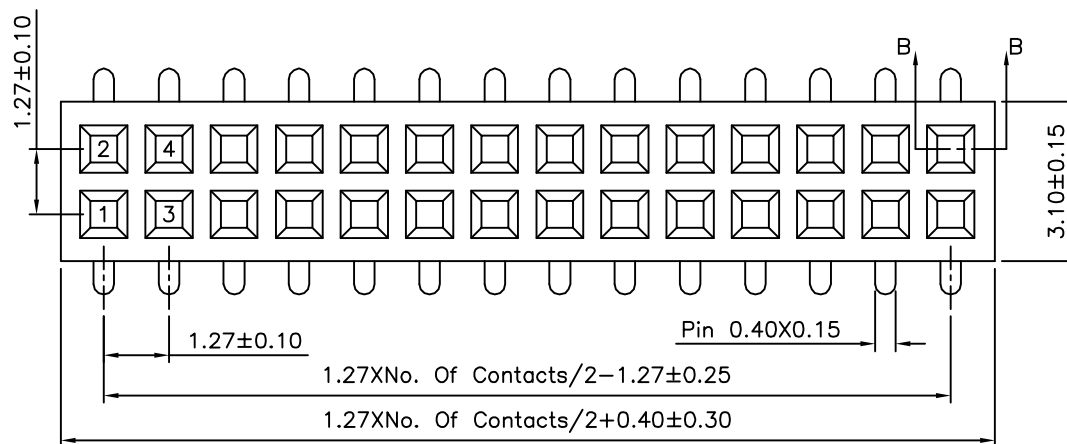

△

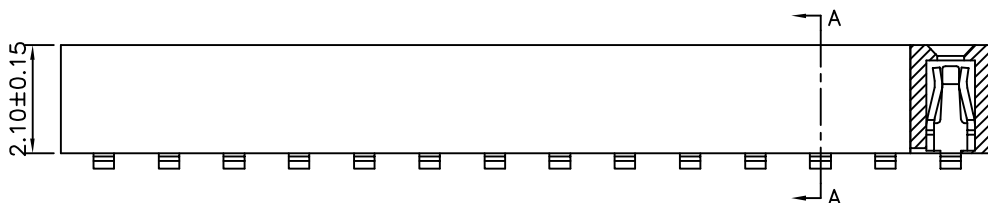

Section B-B



△ Section A-A

△ SPECIFICATION

Current Rating:1.0 Amp
Withstand Voltage:500V AC/DC
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:-40°C~+105°C
Contact:Phosphor Bronze,Gold Plated Over Nickel
△ Insulator:PA9T+30%G.F.(UL94V-0),Black
RoHS Compliant

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

10807

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

YBL

SCALE


NONE

REV.

A4

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
△ .X ±0.40
.XX ±0.25
.XXX ±0.15
ANG. ±3°

UNIT
mm



△ A4

Modify Data

HZF

11/11/2013

△ A3

Modify Spec.

HZF

02/26/2013

△ A2

Add P/N Code

HZF

07/17/2012

△ A1

Modify Data

HZF

03/18/2010

△ A0

NEW RELEASE

BECKY

03/25/2005

NO. REV.

REVISIONS

CHK

DATE