
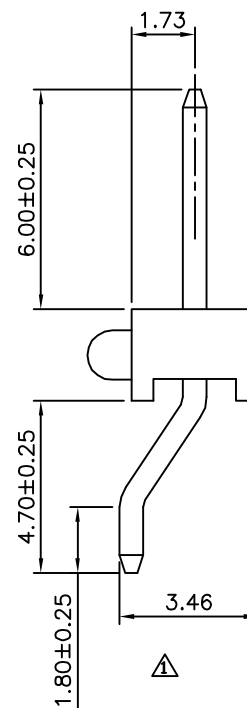
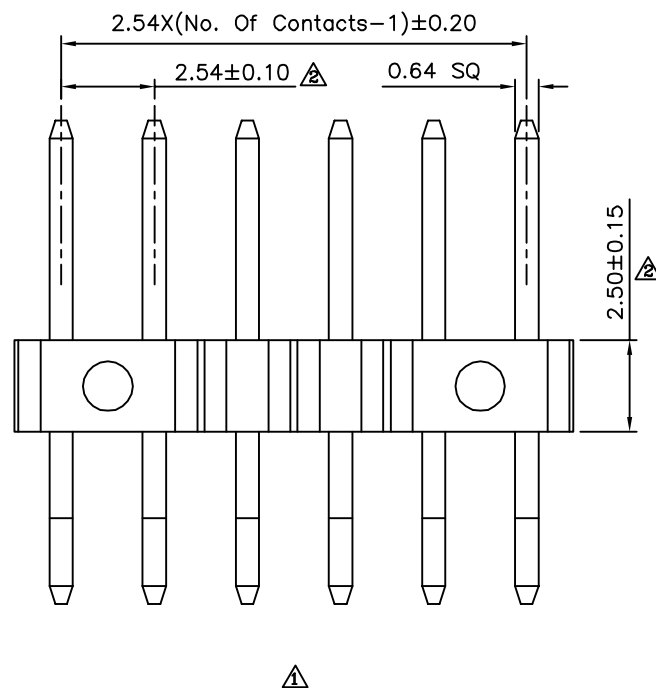
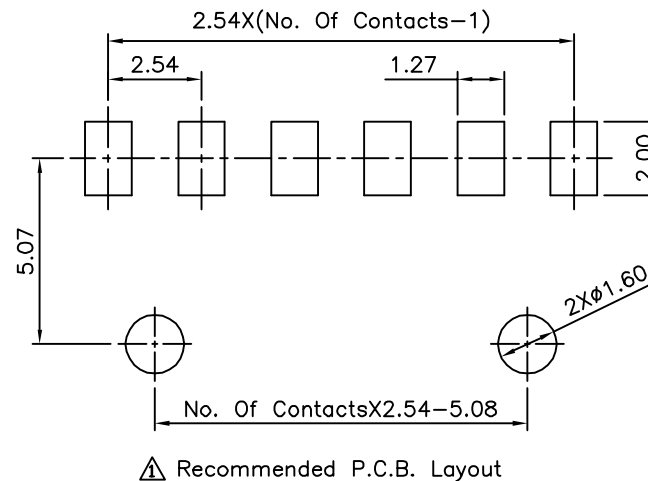


△ SPECIFICATION

Current:3A
 Withstanding Voltage:1000V AC RMS
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Operating Temperature:-55°C~+105°C
 Housing:PA6T(UL94V-0),Black
 △ Contact:Copper Alloy,Gold Flash Over Nickel
 No. Of Contacts:03~40 Contacts
 RoHS Compliant

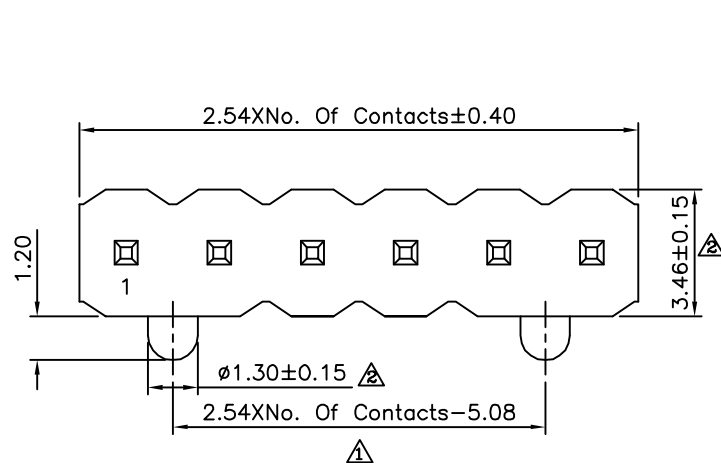

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

11063

SCALE NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY


SONG

REV.

A2

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE
 .X ±0.38
 .XX ±0.25
 ANG. ±5°

UNIT
 mm



NO.	REV.	REVISIONS	CHK	DATE
△ A2	Modify Data	HZF	11/22/2012	
△ A1	Modify Data	HZF	12/13/2010	
△ A0	NEW RELEASE	HZF	09/27/2006	