

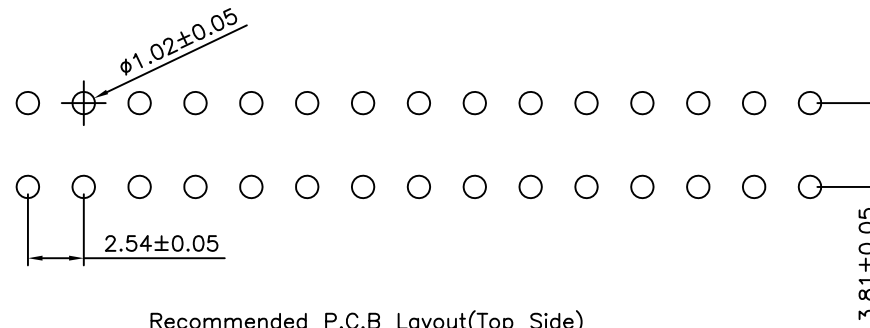


SPECIFICATION

Current Rating:3.0Amp
Voltage Rating:550V AC/DC
Contact Resistance:20Milliohms Max
Insulation Resistance:1000Megohms Min
Operation Temperature:-40°C~+105°C
Contact:Phosphor Bronze
Au And Sn Over Nickel
Insulator:PA6T+30%GF UL94V-0



Recommended P.C.B Layout(Top Side)

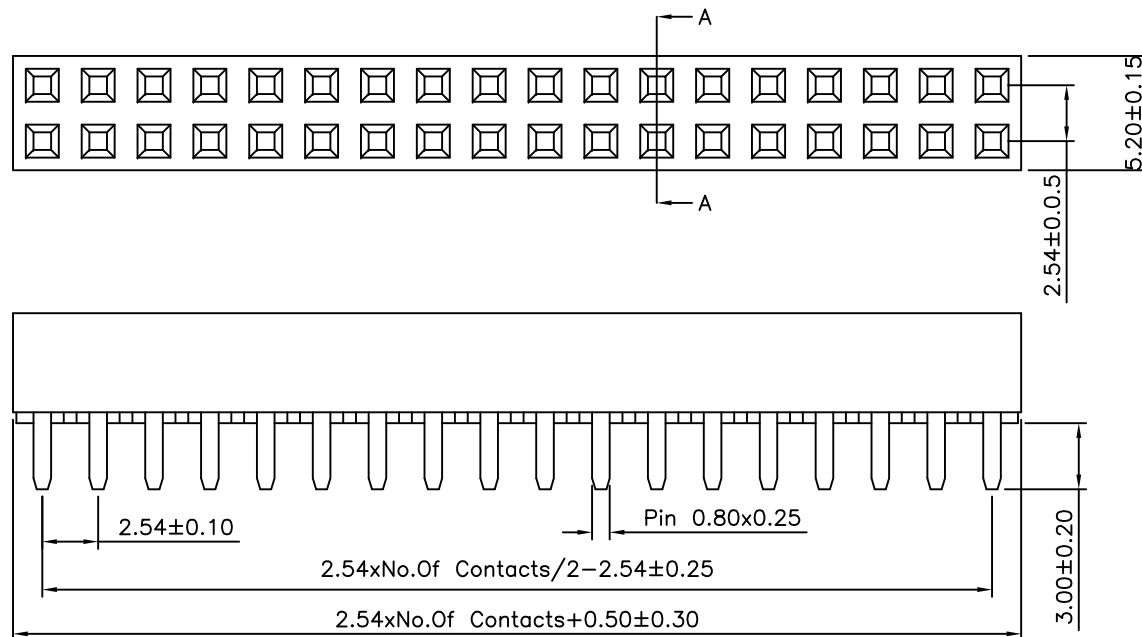

Section: A-A

4U CON 元化興業股份有限公司
4U CON TECHNOLOGY INC.

DRAWING No.

11123

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

JLT

UNLESS OTHERWISE SPECIFIED	
-------------------------------	--

TOLERANCES ARE
.X ±0.40
.XX ±0.25
.XXX ±0.15
ANG: ±3°

UNIT	mm
------	----



△	AO
NO.	REV.

NEW RELEASE

REVISIONS

HZF

04/25/2007

CHK

	DATE
--	------