

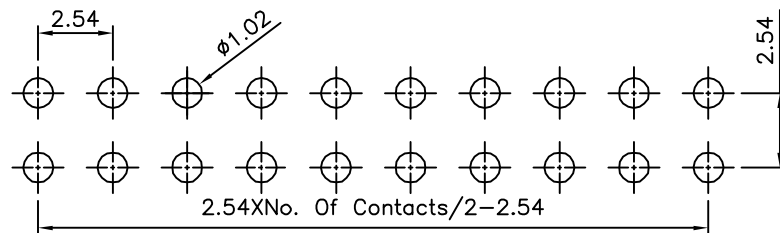
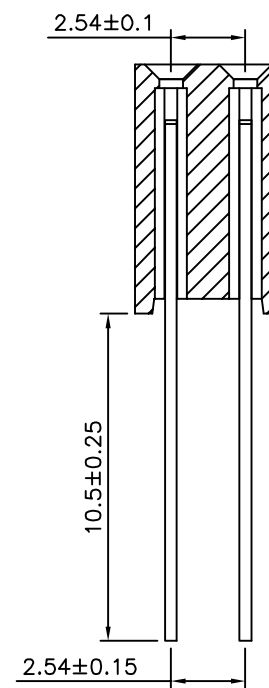


# SPECIFICATION

Current Rating:3A  
 Withstand Voltage:1000V AC  
 Contact Resistance:20 Milliohms Max.  
 Insulation Resistance:1000 Megaohms Min.  
 Operating Temperature:-40°C~+105°C  
 Insulator:PA6T(UL94V-O),Black  
 Contact:Brass,Gold Flash Over Nickel  
 RoHS Compliant

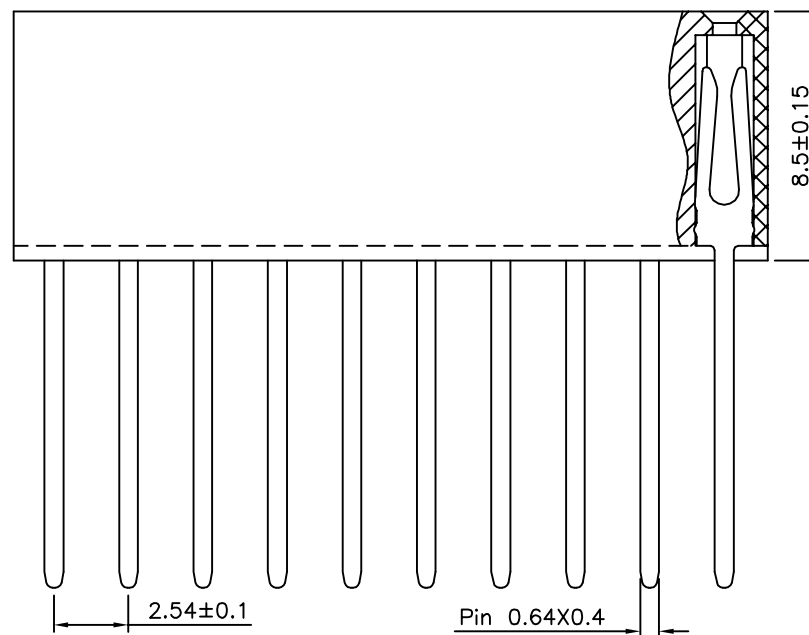

Recommended P.C.B. Layout(Top View)  
 (PCB Board Tolerance±0.05)

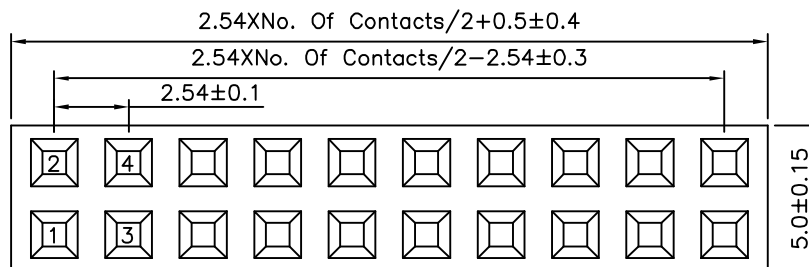

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.

11262

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

HAO

UNLESS OTHERWISE  
 SPECIFIED  
 TOLERANCES ARE

X ±0.25 X\* ±2°  
 .X ±0.20 .X\* ±1.5°  
 .XX ±0.15 .XX\* ±1°  
 .XXX ±0.10 .XXX\* ±0.5°

SCALE

NONE

REV.

A0

UNIT

mm



NO. REV.

NEW RELEASE

REVISIONS

CHK

02/06/2015

DATE