

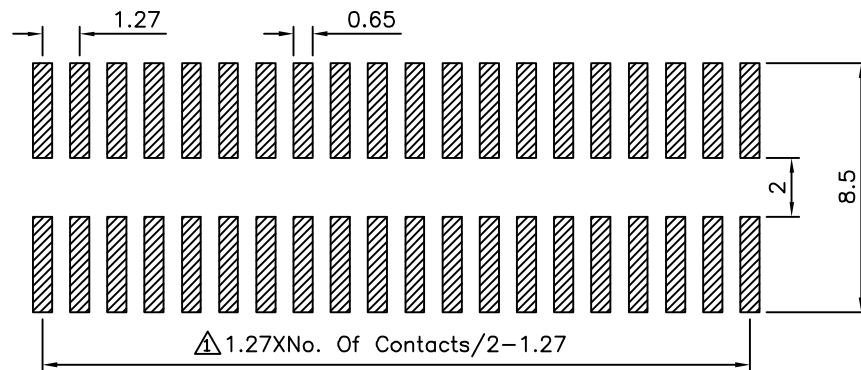
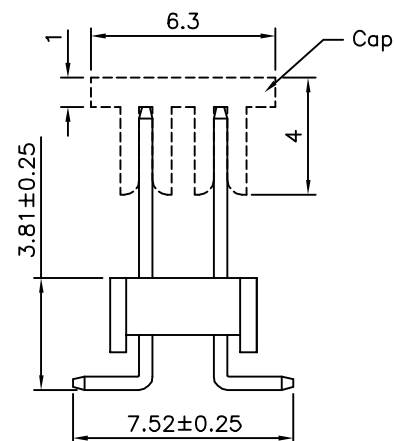


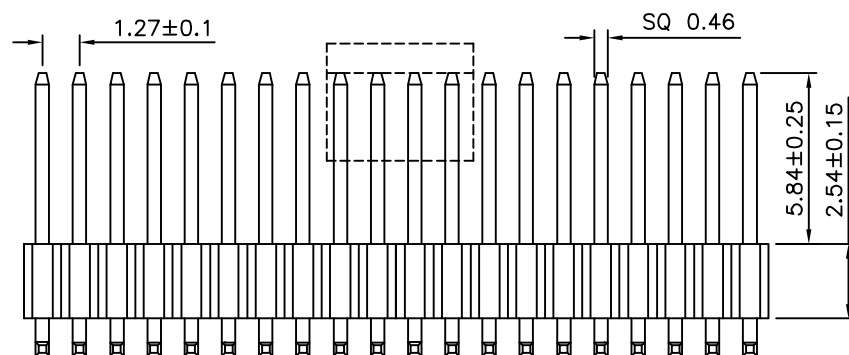

Recommended P.C.B. Layout(Top View)

(PCB Board Tolerance  $\pm 0.05$ )

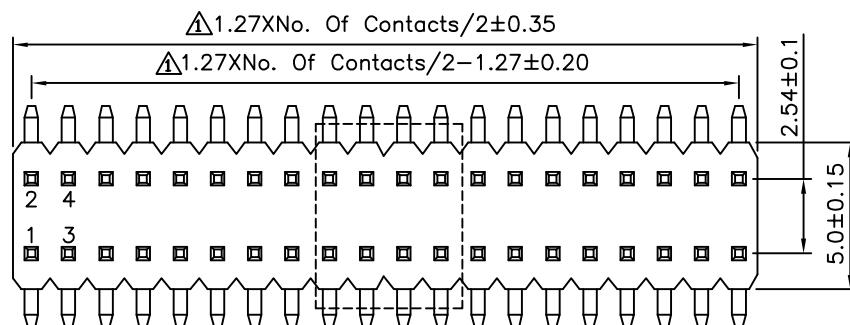

# SPECIFICATION

Current Rating:1 Amp  
Withstand Voltage:500V AC  
Contact Resistance:20 Milliohms Max.  
Insulation Resistance:1000 Megaohms Min.  
Operating Temperature:-40°C~+105°C  
Insulator:PA6T(UL94V-0),Black  
Contact:Brass,Gold Flash Over Nickel  
RoHS Compliant

**4UCON** 元化興業股份有限公司  
4UCON TECHNOLOGY INC.

DRAWING No.

11275

SCALE

NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

HAO


REV.

A1

UNLESS OTHERWISE  
SPECIFIED  
TOLERANCES ARE

X:  $\pm 0.25$  X:  $\pm 2^\circ$   
X:  $\pm 0.20$  X:  $\pm 1.5^\circ$   
.XX  $\pm 0.15$  .XX  $\pm 1^\circ$   
.XXX  $\pm 0.10$  .XXX  $\pm 0.5^\circ$

UNIT  
mm



|    |     |             |     |            |
|----|-----|-------------|-----|------------|
|    |     |             |     |            |
|    |     |             |     |            |
|    |     |             |     |            |
|    |     |             |     |            |
| △  | A1  | Modify Dim. | HZF | 08/27/2015 |
| △  | A0  | NEW RELEASE | HZF | 01/01/2015 |
| NO | REV | REVISIONS   | CHK | DATE       |