

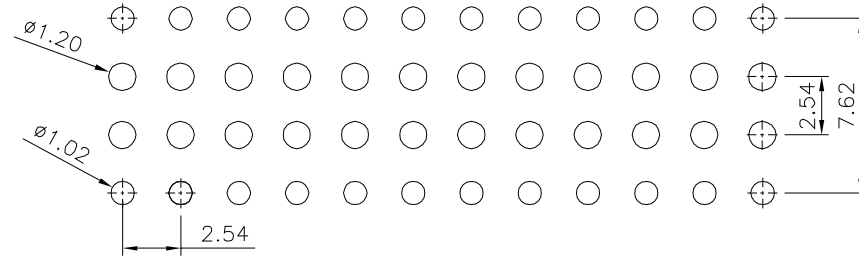
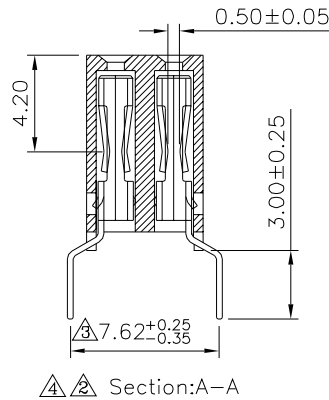


SPECIFICATION

- Current Rating:3.0A
- Withstand Voltage1000V AC
- Contact Resistance:20 Milliohms Max.
- Insulation Resistance:1000 Megaohms Min.
- Operation Temperature:-40°C~+105°C
- Contact:Phosphor Bronze
- Gold Flash Over Nickel
- Insulator:LCP(UL94V-0),Black
- RoHS Compliant

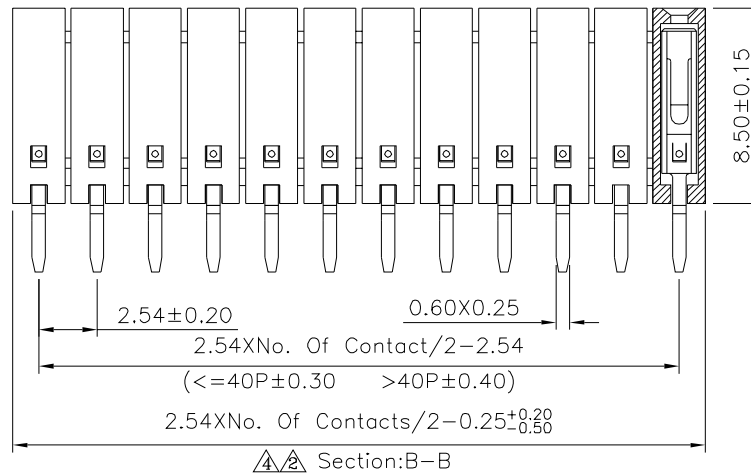

Recommended P.C.B Layout(Top Side)
PCB Board Tolerance ± 0.05

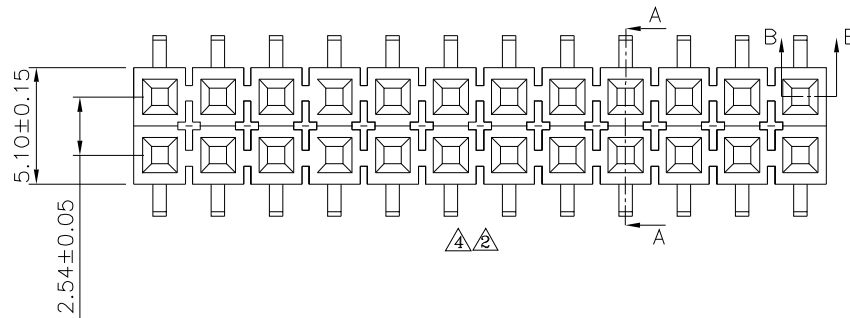

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. 1

11296

SCALE NONE

APPROVED BY Jason Wu
CHECKED BY Leo Han
DRAWING BY Michelle Lee

REV. A4

UNLESS OTHERWISE SPECIFIED
TOLERANCES ARE
.X ± 0.40
.XX ± 0.25
.XXX ± 0.15
ANG. $\pm 3^\circ$

UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
4	A4	Modify Data	HZF	11/10/2025
3	A3	Modify Data	HZF	10/21/2013
2	A2	Modify Data	HZF	03/27/2012
1	A1	Modify Data	HZF	03/01/2012
0	A0	NEW RELEASE	HZF	01/26/2008