

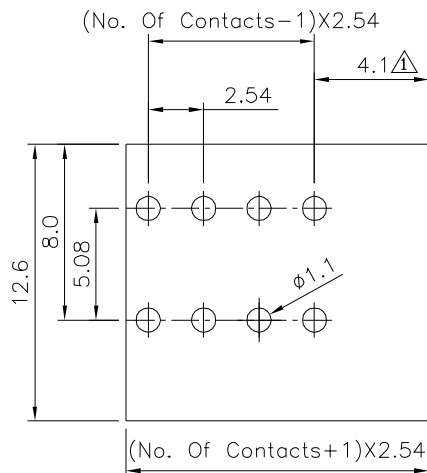



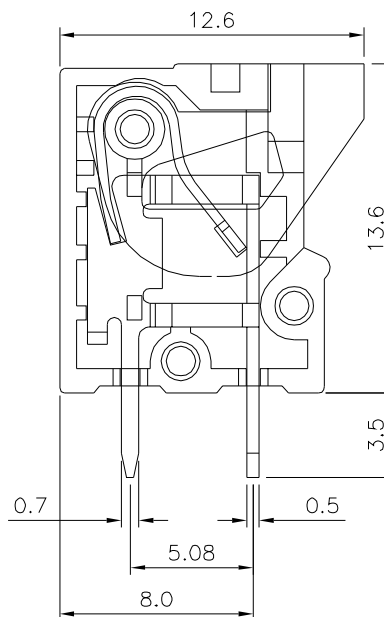

Recommended P.C.B. Layout

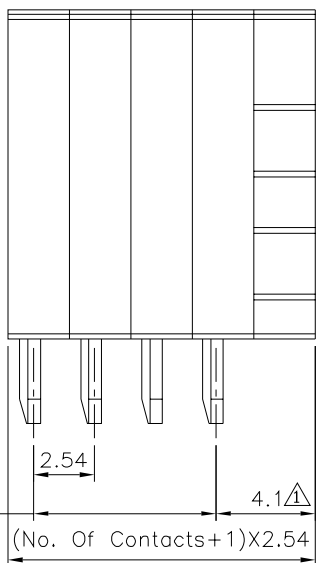

△△ SPECIFICATION
Current Rating:2 Amp/Way Max.
Voltage Rating:150V AC
Withstanding Voltage:2000V AC(1 Minute)
Test Time=60s/PCS
Contact Resistance:20 Milliohms Max.
Wire Range:20~26 AWG
Operation Temperature:-40°C~+105°C
Test Temperature:250°C 5 Seconds Max.
Wire Guard:Stainless Steel
Surface Of Solder Tails:Copper Alloy,Tin Plated
△4 Insulator Body(Housing):Polyamide+G.F.(UL94V-0),Green
RoHS Compliant
* 02~20P Available

4UCON

元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. **△4△3△**

11390

SCALE

NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY


HAO

REV.

A4

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
X. ±0.50
.X ±0.30
.XX ±0.20
ANG. ±1°

UNIT
mm



△4 A4

Modify Data

HZF

06/18/2020

△3 A3

Modify Data

HZF

05/12/2015

△2 A2

Modify Data

HZF

09/10/2013

△1 A1

Modify Data

HZF

01/06/2012

△0 A0

NEW RELEASE

HZF

05/23/2009

NO. REV.

REVISIONS

CHK

DATE