

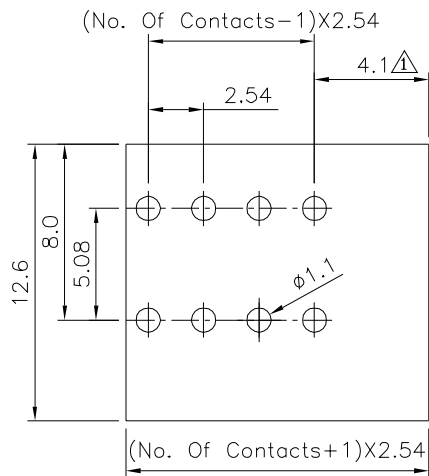



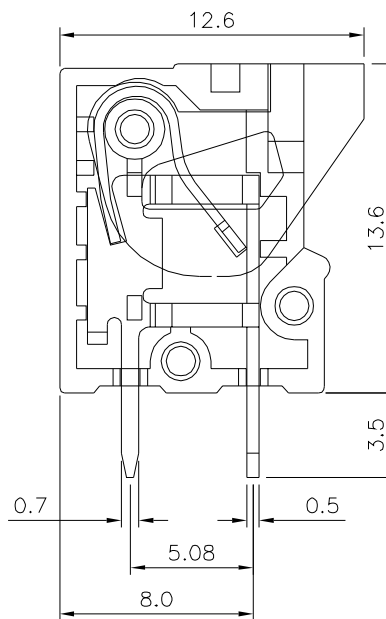

Recommended P.C.B. Layout

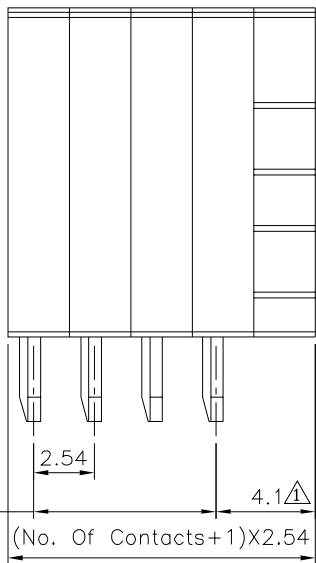

△△ SPECIFICATION
Current Rating:2 Amp/Way Max.
Voltage Rating:150V AC
Withstanding Voltage:2000V AC(1 Minute)
Test Time=60s/PCS
Contact Resistance:20 Milliohms Max.
Wire Range:20~26 AWG
Operation Temperature:-40°C~+105°C
Test Temperature:250°C 5 Seconds Max.
Wire Guard:Stainless Steel
Surface Of Solder Tails:Copper Alloy,Tin Plated
△4 Insulator Body(Housing):Polyamide+G.F.(UL94V-0),Green
RoHS Compliant
* 02~20P Available

4UCON

元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. △4△3△

11392

SCALE

NONE

REV.

A4

APPROVED BY

EMILY

CHECKED BY


HZF

DRAWING BY

HAO

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
X. ±0.50
.X ±0.30
.XX ±0.20
ANG. ±1°

UNIT
mm



△4	A4	Modify Data	HZF	06/18/2020
△3	A3	Modify Data	HZF	05/12/2015
△2	A2	Modify Data	HZF	09/10/2013
△1	A1	Modify Data	HZF	01/06/2012
△0	A0	NEW RELEASE	HZF	05/23/2009
NO.	REV.	REVISIONS	CHK	DATE