



△△ SPECIFICATION


Current Rating:5A AC/DC
Voltage Raing:300V AC/DC
Withstand Voltage:1500V AC/Minute
Insulation Resistance:1000 Megaohms Min.
Temperature Range:-25°C~+90°C
Material:PA66(UL94V-2)
RoHS Compliant

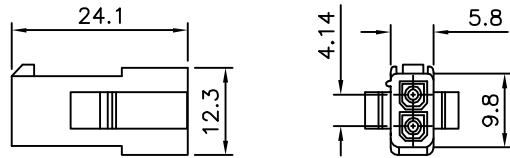


△ 1X02 Pin

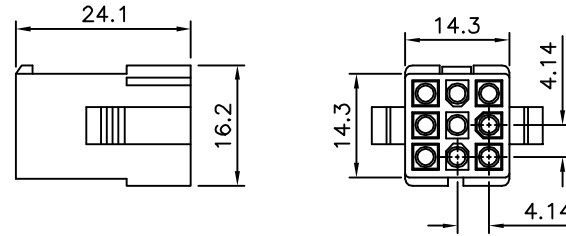


△ 3X03 Pin

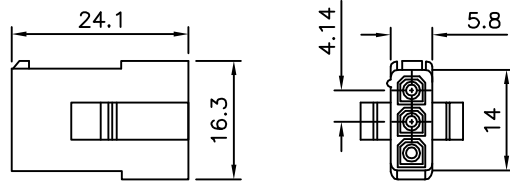


△ 1X03 Pin

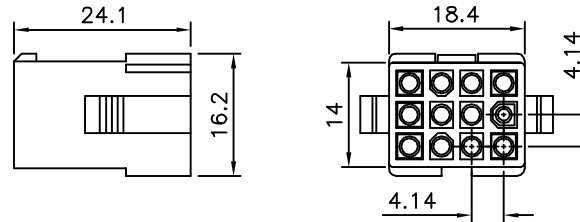


△△ 3X04 Pin

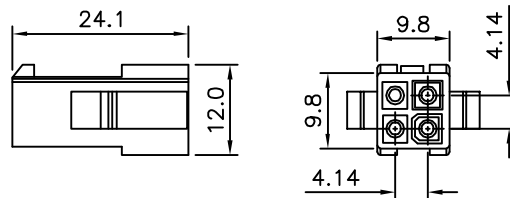

△ 2X02 Pin

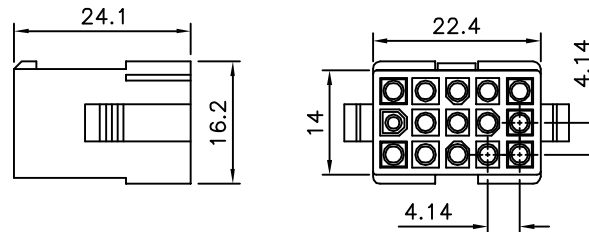

△△ 3X05 Pin

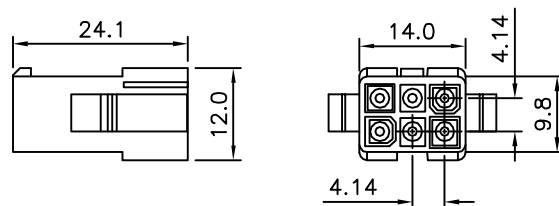

△ 2X03 Pin

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

11564

SCALE

NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

SONG

REV.

A2

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

X. ±0.3
.X ±0.3
.XX ±0.3

UNIT
mm



NO.	REV.	REVISIONS	CHK	DATE
△	A2	Modify Data	HZF	09/18/2012
△	A1	Modify Data	HZF	11/10/2011
△	A0	NEW RELEASE		