

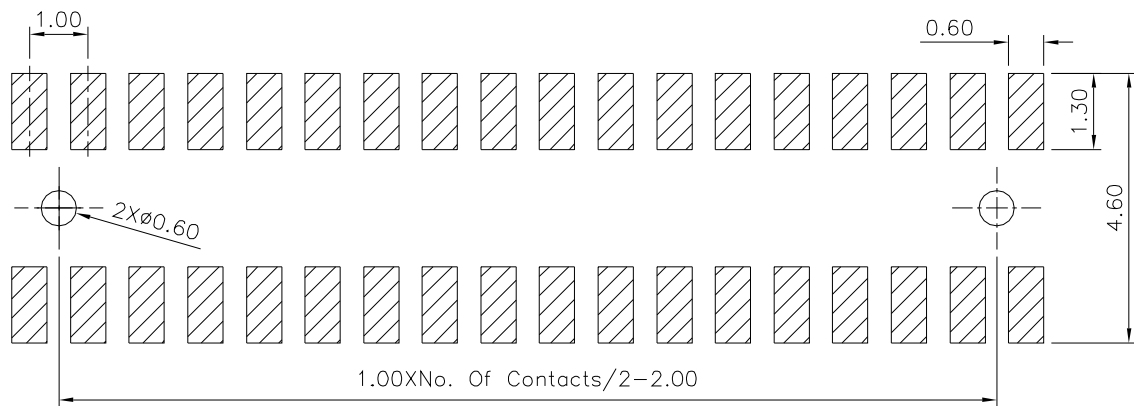



SPECIFICATION

Current Rating:1.0A
Withstand Voltage:500V AC/DC
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:-40°C~+105°C
Insulator:PA9T+30%G.F.(UL94V-0),Black
⚠ Contact:Phosphor Bronze,Gold Plated Over Nickel
RoHS Compliant

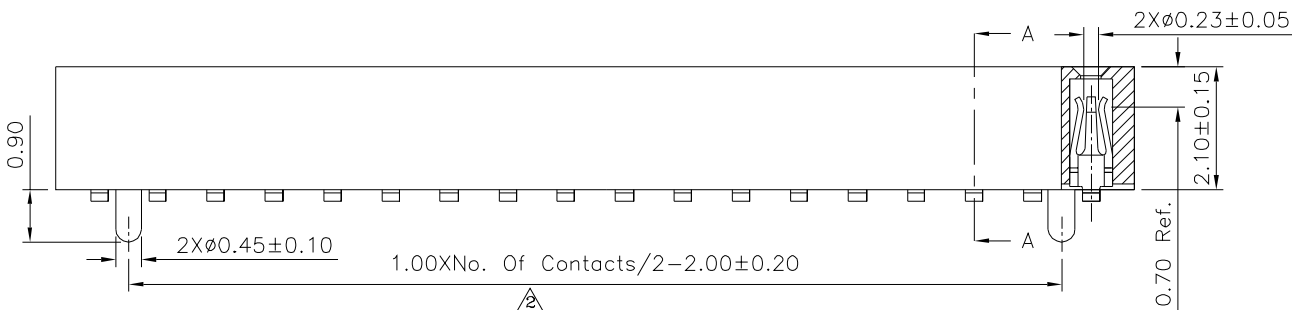

Recommended P.C.B. Layout(Top Side)
(PCB Board Tolerance±0.05)

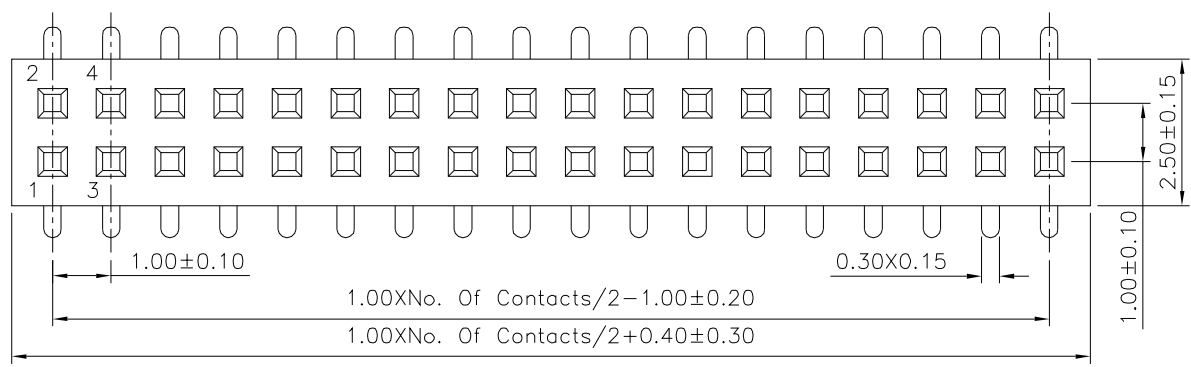

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. 11831		APPROVED BY	
		EMILY	
		CHECKED BY HZF	
DRAWING BY		SONG	
SCALE		REV.	B2

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.40 .XX ±0.25 .XXX ±0.15 ANG. ±3°							
			B2	Modify Data		HZF	09/11/2024
			B1	Modify Data		HZF	11/22/2012
			B0	NEW RELEASE		HZF	09/26/2012
UNIT mm		NO. REV.	REVISIONS		CHK	DATE	