
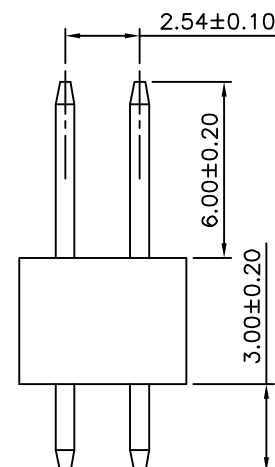
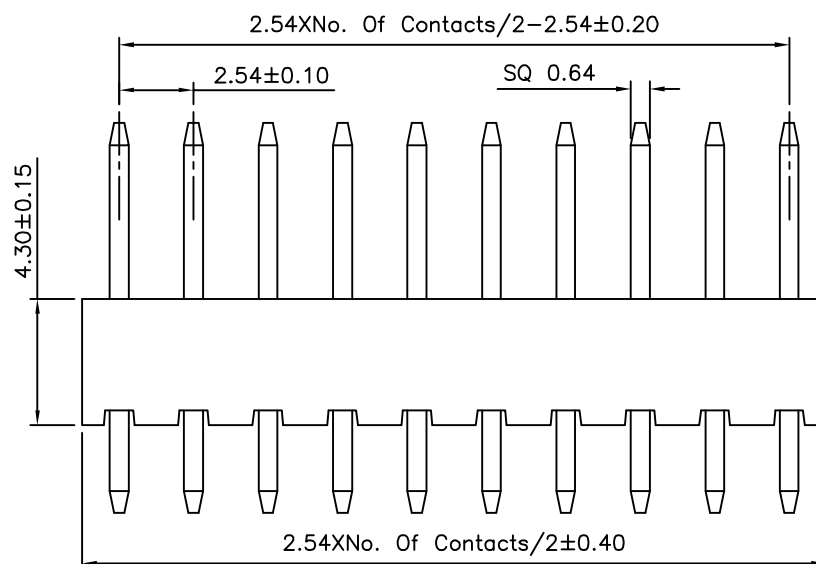


Recommended P.C.B. Layout(Top Side)
(PCB Board Tolerance ± 0.05)

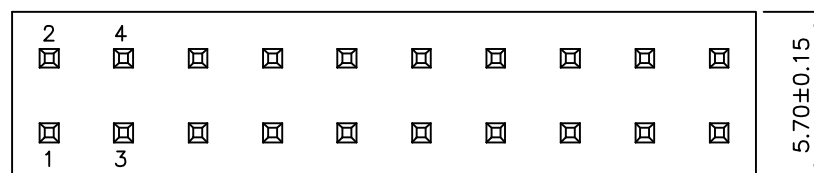

SPECIFICATION

Current Rating:3.0 Amp
Withstand Voltage:1000V AC/DC
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:-40°C~+105°C
Insulator:PA9T+30%G.F.(UL94V-0),Black
Contact:Brass,Gold Plated Over Nickel
RoHS Compliant

DRAWING No.

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

GAO

SCALE

NONE

REV.

AO

UNIT
123 123

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

.X	±0.40
.XX	±0.25
.XXX	±0.15
ANG.	±3°

AO	
NO.	REV.

0	NEW RELEASE
Y.	REVIS

IONS

HZF	08/26/2012
CHK	DATE

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.