





SPECIFICATION

Current Rating:3A

- ⚠ Withstand Voltage:1000V AC
- Contact Resistance:20 Milliohms Max.
- Insulation Resistance:1000 Megaohms Min.
- Operation Temperature:−40°C~+105°C
- Housing:PA6T,UL94V−0,Black
- ⚠ Contact:Phosphor Bronze,Gold Flash Over Nickel
- RoHS Compliant

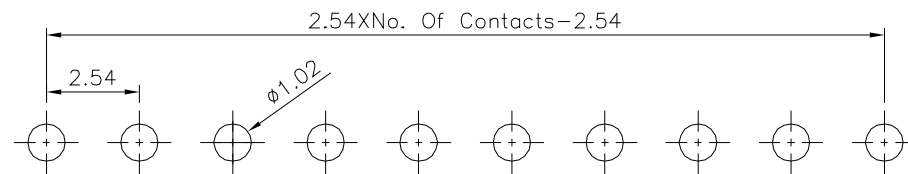

Recommended P.C.B. Layout(Top View)
(PCB Board Tolerance±0.05)

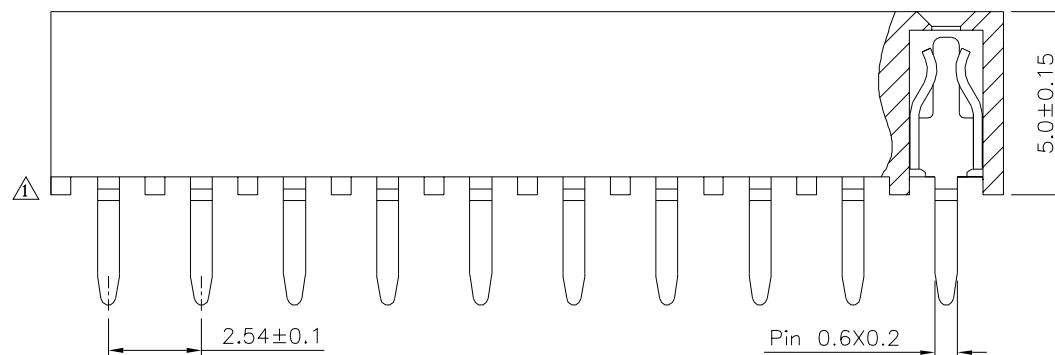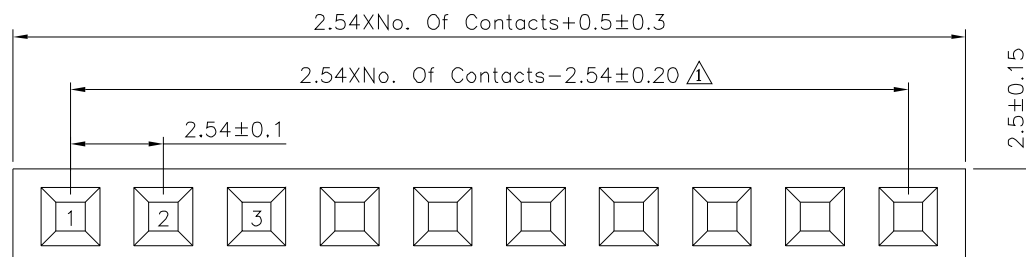

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

12696

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

CYP

SCALE

NONE


REV.

A1

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

X. ±0.25 X.* ±2*
.X ±0.20 .X* ±1.5*
.XX ±0.15 .XX* ±1*
.XXX ±0.10 .XXX* ±0.5*

UNIT
mm



NO.

REV.

REVISIONS

CHK

DATE

A1

Modify Data

HZF

08/13/2019

A0

NEW RELEASE

HZF

10/12/2013