

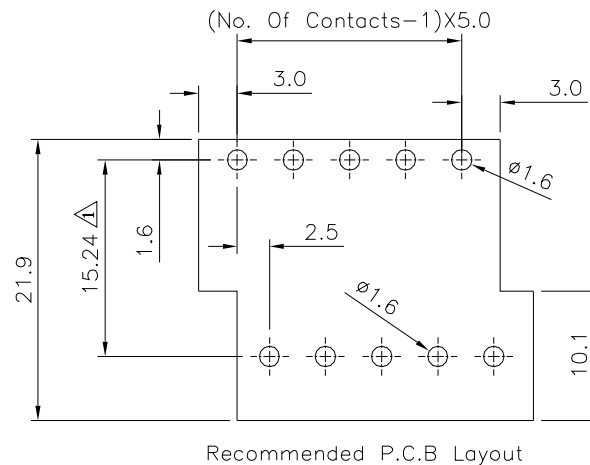
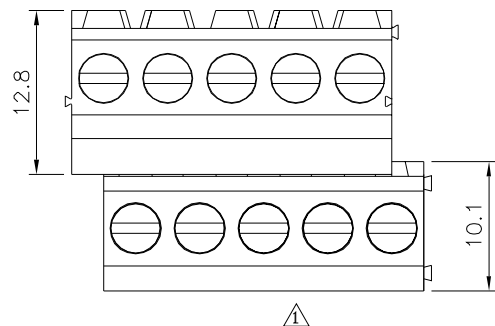


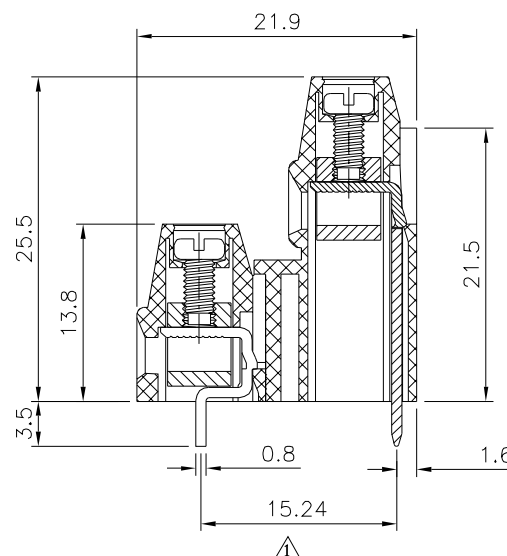

SPECIFICATION

Voltage Rating:300V AC
 Current Rating:16 Amps/Way Max.
 Contact Resistance:20 Milliohms Max.
 Withstanding Voltage:2500V AC(1 Minute)
 Test Time=60 Sec/1 PCS
 Wire Range:12~30 AWG
 Torque:4.5 Kgf.cm/M2.5
 Operation Temperature:-40°C~+105°C
 Soldering Reliability:Test Temperature=250°C±10°C
 5 Seconds Max.

- △ Contact(Metal Housing):Copper Alloy,Nickel Plated
 Terminal Screw:Steel,Galvanized With Cr3+ Plated
 Solder Pin:Copper Alloy,Tin Plated
- △ Insulator:Polyamide(UL94V-0),Green
 RoHS Compliant

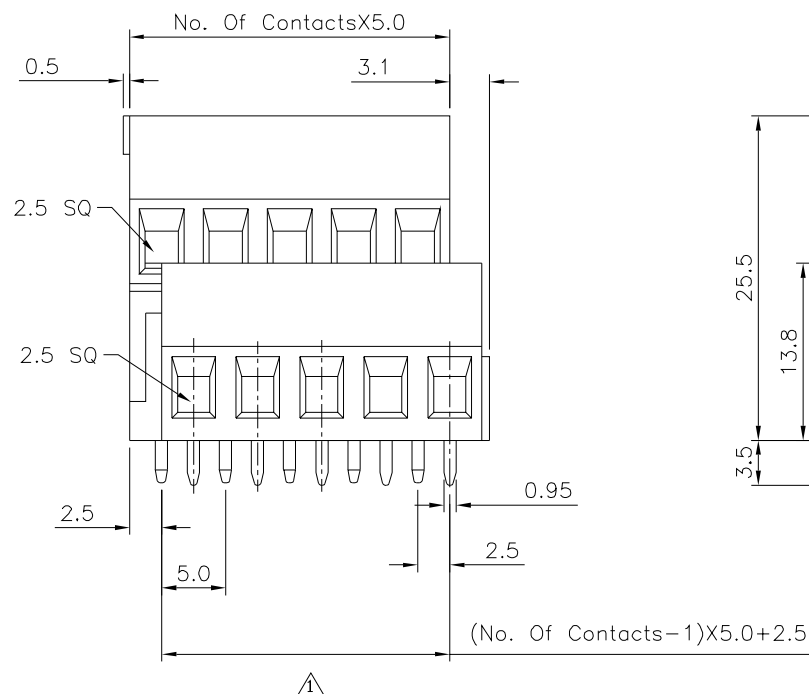

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

12698

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

SAN

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE
 X. ±0.50
 .X ±0.30
 .XX ±0.20
 ANG. ±1°

SCALE

NONE

REV.

A1

UNIT
 mm



NO. REV.

REVISIONS

CHK

DATE

△ A1	Modify Data	HZF	03/26/2014
△ A0	NEW RELEASE	HZF	10/19/2011