

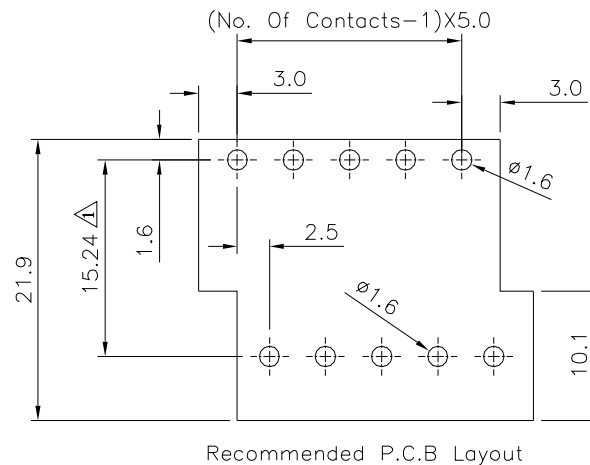
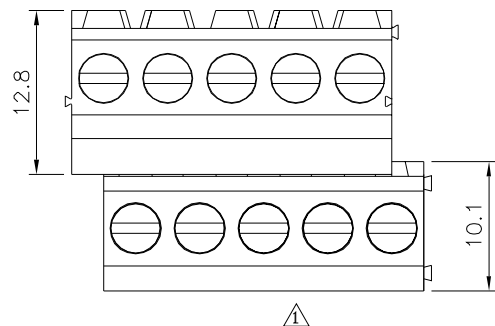


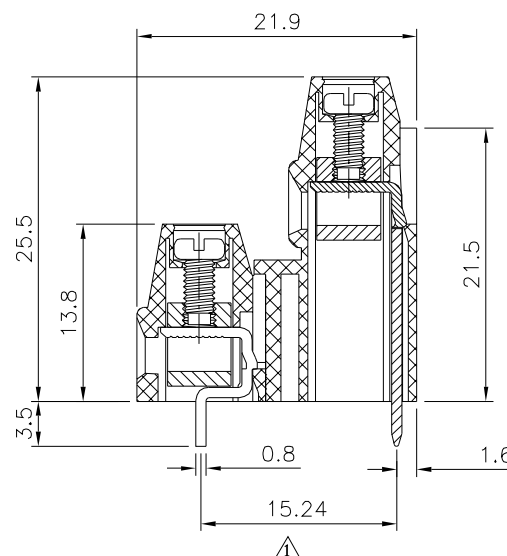

# SPECIFICATION

Voltage Rating:300V AC  
 Current Rating:16 Amps/Way Max.  
 Contact Resistance:20 Milliohms Max.  
 Withstanding Voltage:2500V AC(1 Minute)  
 Test Time=60 Sec/1 PCS  
 Wire Range:12~30 AWG  
 Torque:4.5 Kgf.cm/M2.5  
 Operation Temperature:-40°C~+105°C  
 Soldering Reliability:Test Temperature=250°C±10°C  
 5 Seconds Max.

△ Contact(Metal Housing):Copper Alloy,Nickel Plated  
 Terminal Screw:Steel,Galvanized With Cr3+ Plated  
 Solder Pin:Copper Alloy,Tin Plated  
 △ Insulator:Polyamide(UL94V-0),Green  
 RoHS Compliant

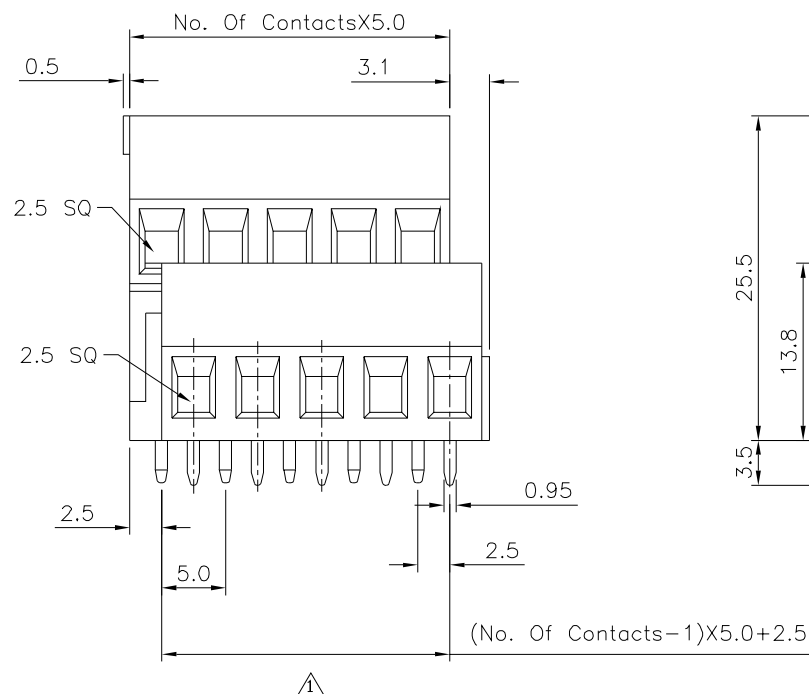

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.

12708

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

SAN

UNLESS OTHERWISE  
 SPECIFIED  
 TOLERANCES ARE  
 X. ±0.50  
 .X ±0.30  
 .XX ±0.20  
 ANG. ±1°

SCALE

NONE

REV.

A1

UNIT  
 mm



NO. REV.

REVISIONS

CHK

DATE

|      |             |     |            |
|------|-------------|-----|------------|
| △ A1 | Modify Data | HZF | 03/26/2014 |
| △ A0 | NEW RELEASE | HZF | 10/19/2011 |