

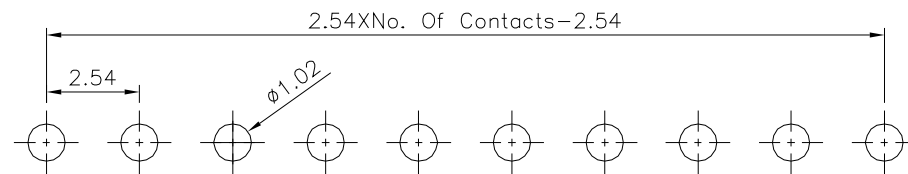



SPECIFICATION

- Current Rating:3A
- ⚠ Withstand Voltage:1000V AC
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Operation Temperature:-40°C~+105°C
 Housing:PA6T,UL94V-0,Black
- ⚠ Contact:Phosphor Bronze,Gold Flash Over Nickel
 RoHS Compliant

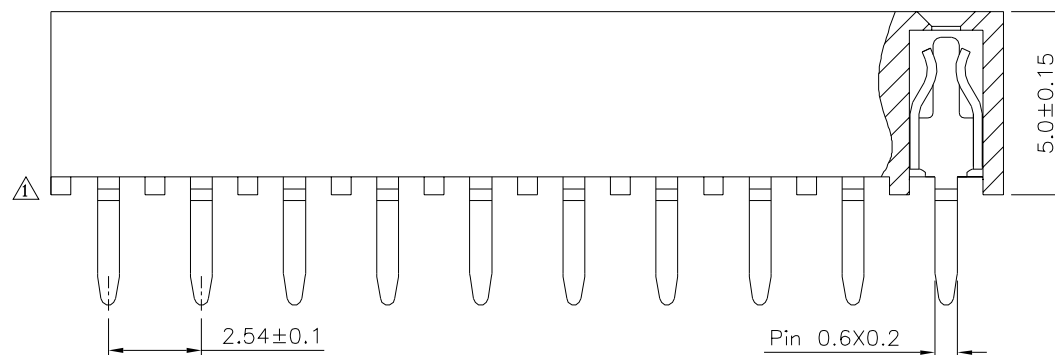

Recommended P.C.B. Layout(Top View)
 (PCB Board Tolerance±0.05)

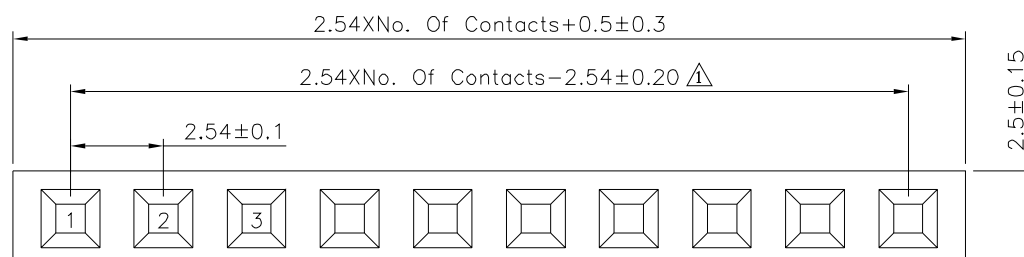

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

12734

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

CYP

SCALE

NONE


REV.

A1

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE

X. ±0.25	X.* ±2°
.X ±0.20	.X* ±1.5°
.XX ±0.15	.XX* ±1°
.XXX ±0.10	.XXX* ±0.5°

UNIT
 mm



NO.

REV.

REVISIONS

CHK

DATE

A1

Modify Data

HZF

08/13/2019

A0

NEW RELEASE

HZF

10/12/2013