

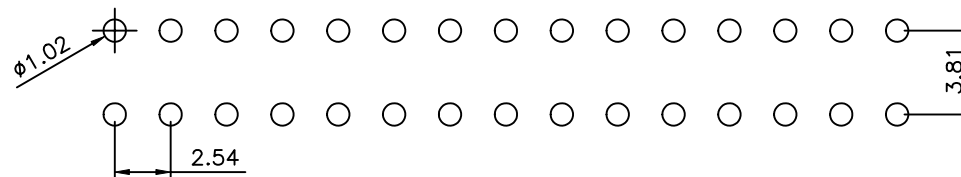



# SPECIFICATION

Current Rating:3.0Amp  
Voltage Rating:500V AC/DC  
Contact Resistance:20Milliohms Max  
Insulation Resistance:1000Megohm Min  
Operation Temperature:-40°C~+105°C  
Contact:Phosphor Bronze  
Gold Plated Over Nickel  
Insulator:PA6T+30%GF UL94V-0  
RoHS Compliant

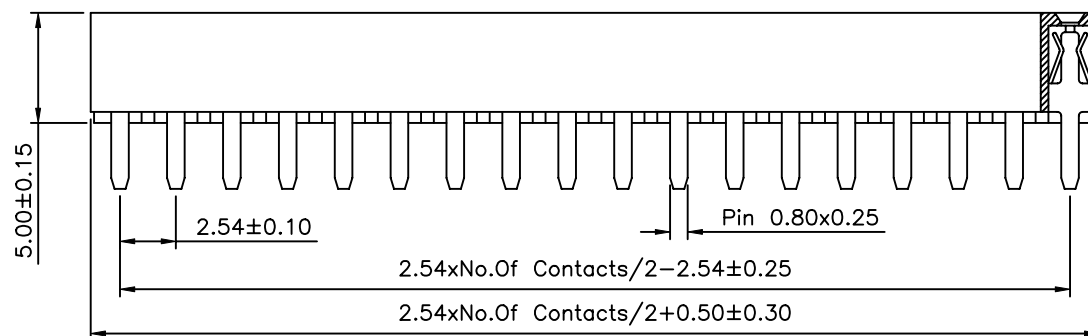

Recommended P.C.B Layout(Top Side)  
(PCB Board Tolerance±0.05)

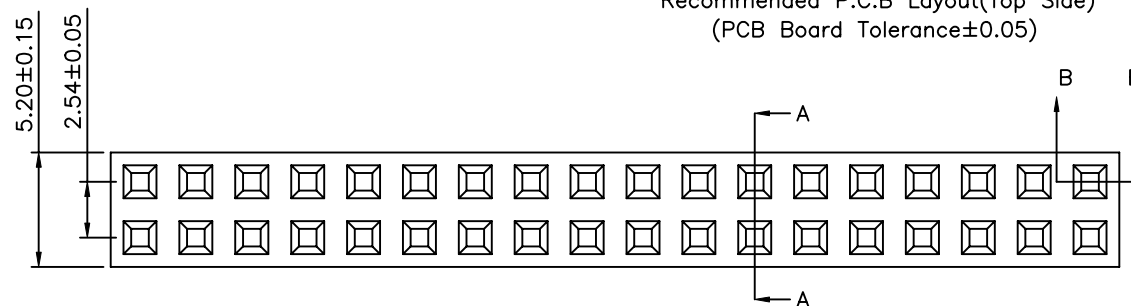

Section: A-A

**4UCON** 元化興業股份有限公司  
4UCON TECHNOLOGY INC.

DRAWING No.

13309

SCALE

NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

LXX


REV.

A1

UNLESS OTHERWISE  
SPECIFIED

TOLERANCES ARE  
.X ±0.40  
.XX ±0.25  
.XXX ±0.15  
ANG: ±3°

UNIT  
mm



NO.

REV.

A1 Modify P/N

A0 NEW RELEASE

REVISIONS

HZF

HZF

CHK

05/19/2008

04/25/2007

DATE