

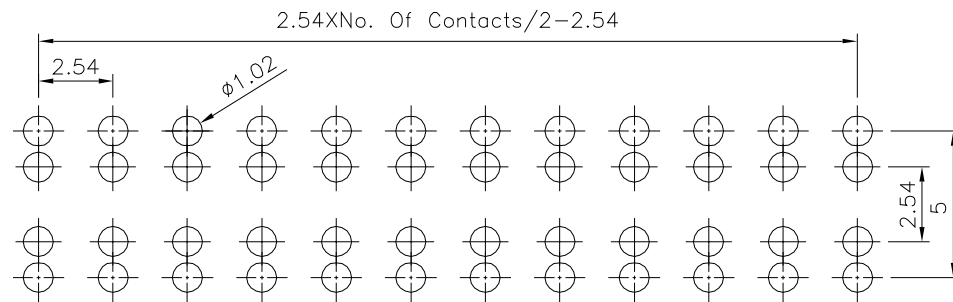



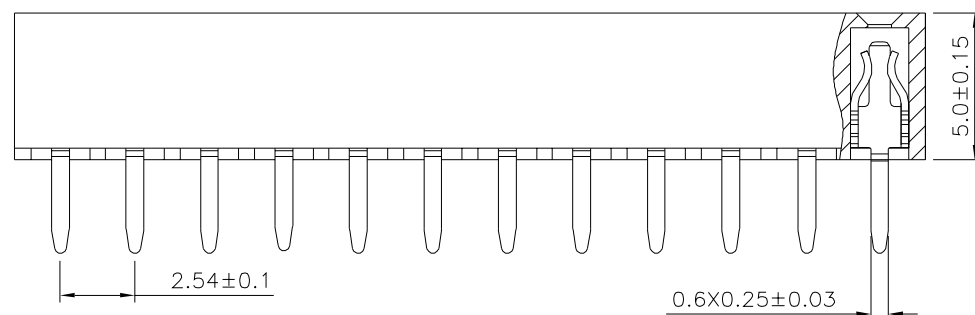

Recommended P.C.B. Layout(Top View)
(PCB Board Tolerance ± 0.05)

SPECIFICATION

Current Rating:3 Amps
Withstanding Voltage:500V AC
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operating Temperature:-40°C~+105°C
Insulator:PA6T(UL94V-0),Black
Contact:Phosphor Bronze,Gold Flash Over Nickel
RoHS Compliant

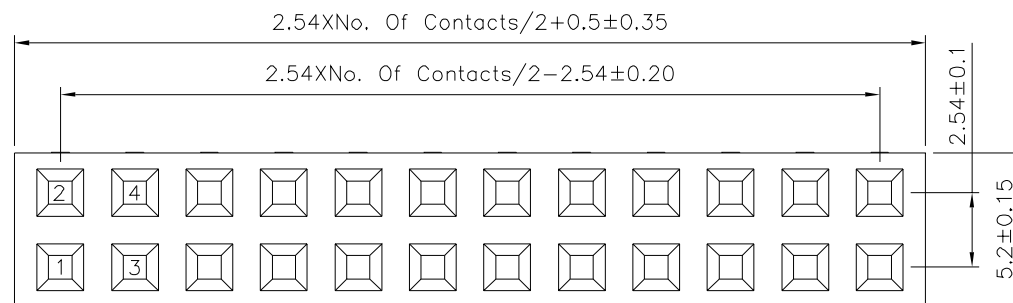

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

13333

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

CYP

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

X. ± 0.25	X.* $\pm 2^\circ$
.X ± 0.20	.X* $\pm 1.5^\circ$
.XX ± 0.15	.XX* $\pm 1^\circ$
.XXX ± 0.10	.XXX* $\pm 0.5^\circ$

UNIT
mm



NO.	REV.	REVISIONS

A0 NEW RELEASE

CHK

DATE

HZF 04/27/2016

DATE