
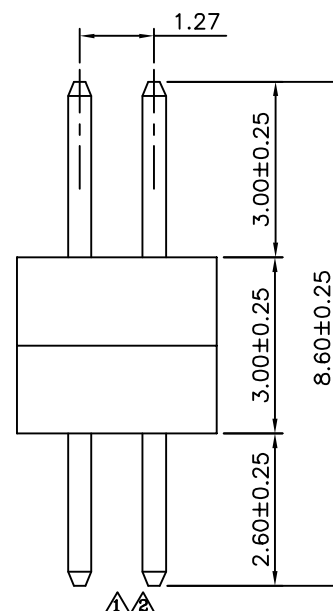
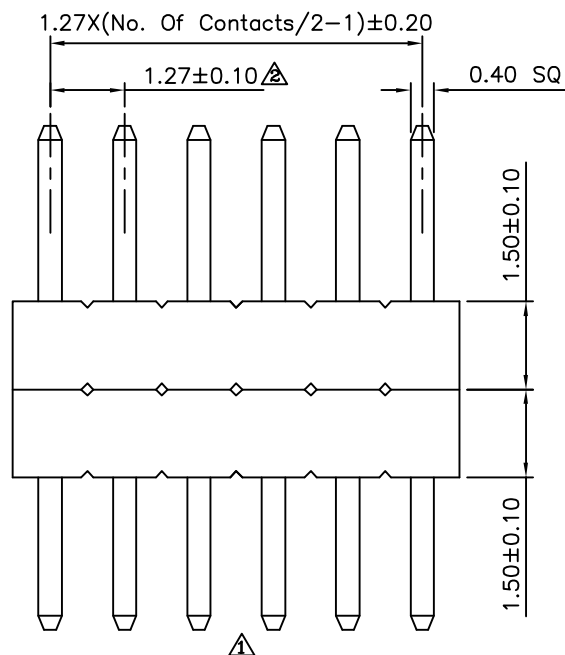
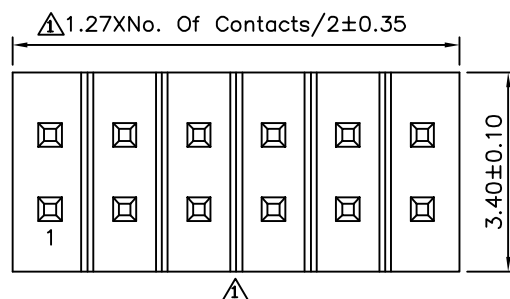


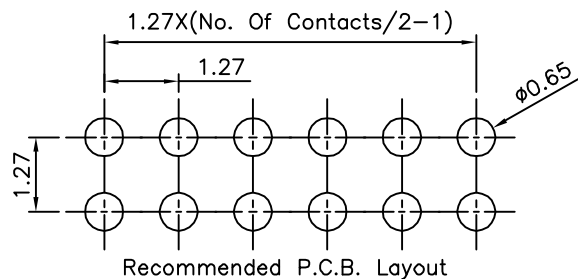

1 SPECIFICATION

Current:1A
Dielectric Strength:1000V AC Minute
Contact Resistance:20 Milliohms Max.
Insulation Resistance:5000 Megaohms Min.
Operation Temperature:-55°C~+105°C
Housing:PA6T(UL94V-O),Black
Contact:Brass,Gold Flash Over Nickel
No. Of Contacts:04~100 Contacts
RoHS Compliant

4U CON 元化興業股份有限公司
4U CON TECHNOLOGY INC.

DRAWING No.

13493

SCALE	NONE
-------	------

NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY


HAO

REV.	
------	--

A4

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	
.X ± 0.38	
.XX ± 0.25	
ANG. $\pm 5^\circ$	

	UNIT
	100 100



	$\triangle_4$	A4
--	---------------	----

4	Modify Spec.
---	--------------

H7F

05/23/2015

	61
	17

Modify Speed	
Modify Data	

1121
1175

03/25/2013	
04/15/2013	

	A3
A	A

Modify Data
Modify Data

04/15/2013	
11/23/2013	

 A2

2 | Modify Data

HZF

11/28/2012

	A1
---	----

Modify Data

HZF

08/02/2010

	△	△0

RELEASE

BECKY

08/08/2	
---------	--