
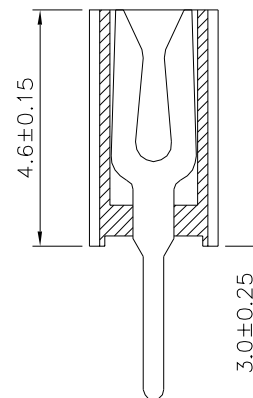
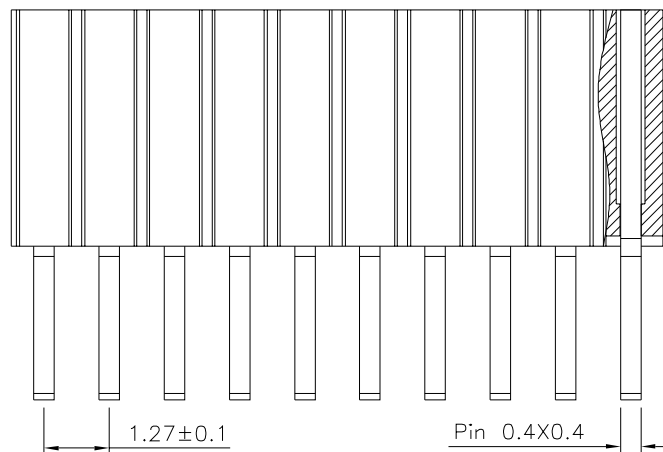


Recommended P.C.B. Layout(Top View)  
(PCB Board Tolerance $\pm 0.05$ )

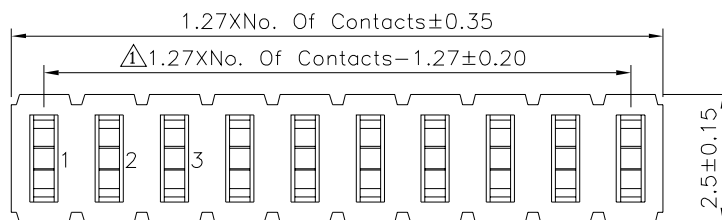

# SPECIFICATION

Current Rating:1 Amp  
Withstand Voltage:500V AC  
Contact Resistance:20 Milliohms Max.  
Insulation Resistance:1000 Megaohms Min.  
Operating Temperature:-40°C~+105°C  
Insulator:PA6T(UL94V-0),Black  
Contact:Brass,Gold Flash Over Nickel  
RoHS Compliant

**4UCON** 元化興業股份有限公司  
4UCON TECHNOLOGY INC.

DRAWING No.

13786

APPROVED BY

MEI

CHECKED BY

HZF


DRAWING BY

HAO

UNLESS OTHERWISE  
SPECIFIED  
TOLERANCES ARE

|                 |                       |
|-----------------|-----------------------|
| X: $\pm 0.25$   | X.: $\pm 2^\circ$     |
| .X $\pm 0.20$   | .X: $\pm 1.5^\circ$   |
| .XX $\pm 0.15$  | .XX: $\pm 1^\circ$    |
| .XXX $\pm 0.10$ | .XXX: $\pm 0.5^\circ$ |

UNIT  
mm



|         |           |             |     |            |
|---------|-----------|-------------|-----|------------|
|         |           |             |     |            |
|         |           |             |     |            |
|         |           |             |     |            |
|         |           |             |     |            |
| ⚠       | A1        | Modify Data | HZF | 03/26/2016 |
| ⚠       | A0        | NEW RELEASE | HZF | 02/01/2015 |
| NO.REV. | REVISIONS |             | CHK | DATE       |