
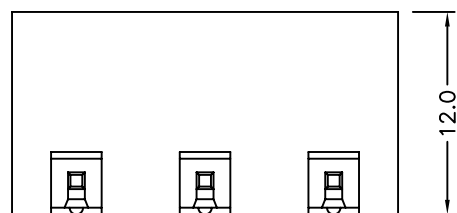


SPECIFICATIONS



Material:
Solder Pin: Brass with Tin Plated
Insulator Body(Housing): Polyamide(Glass Filled)(UL94V-0)

Electrical:
Voltage Rating: 300VAC
Current Rating: 10A
Insulation Resistance: 500 Megohms at DC 500V
Withstanding Voltage: AC 1500V (1Min.)

Mechanical:
Using Temperature Range: -40°C to +105°C
Soldering Temperature: +250°C, 5 Seconds Max.

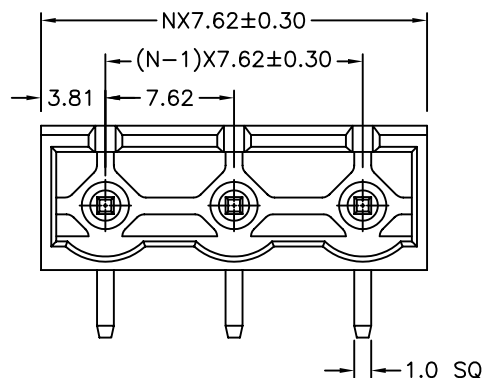

N=Number of contacts
PCB. LAYOUT

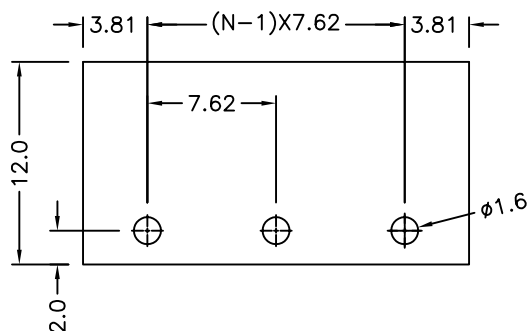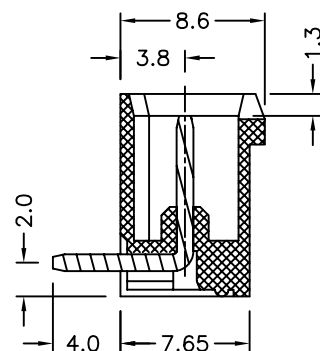

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.
13840

APPROVED BY MEI
CHECKED BY BECKY
DRAWING BY HZF

UNLESS OTHERWISE SPECIFIED
TOLERANCES ARE
.X ± 0.30
.XX ± 0.10
ANG.

SCALE NONE

REV. A0

UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
0	A0	NEW RELEASE	MEI	