


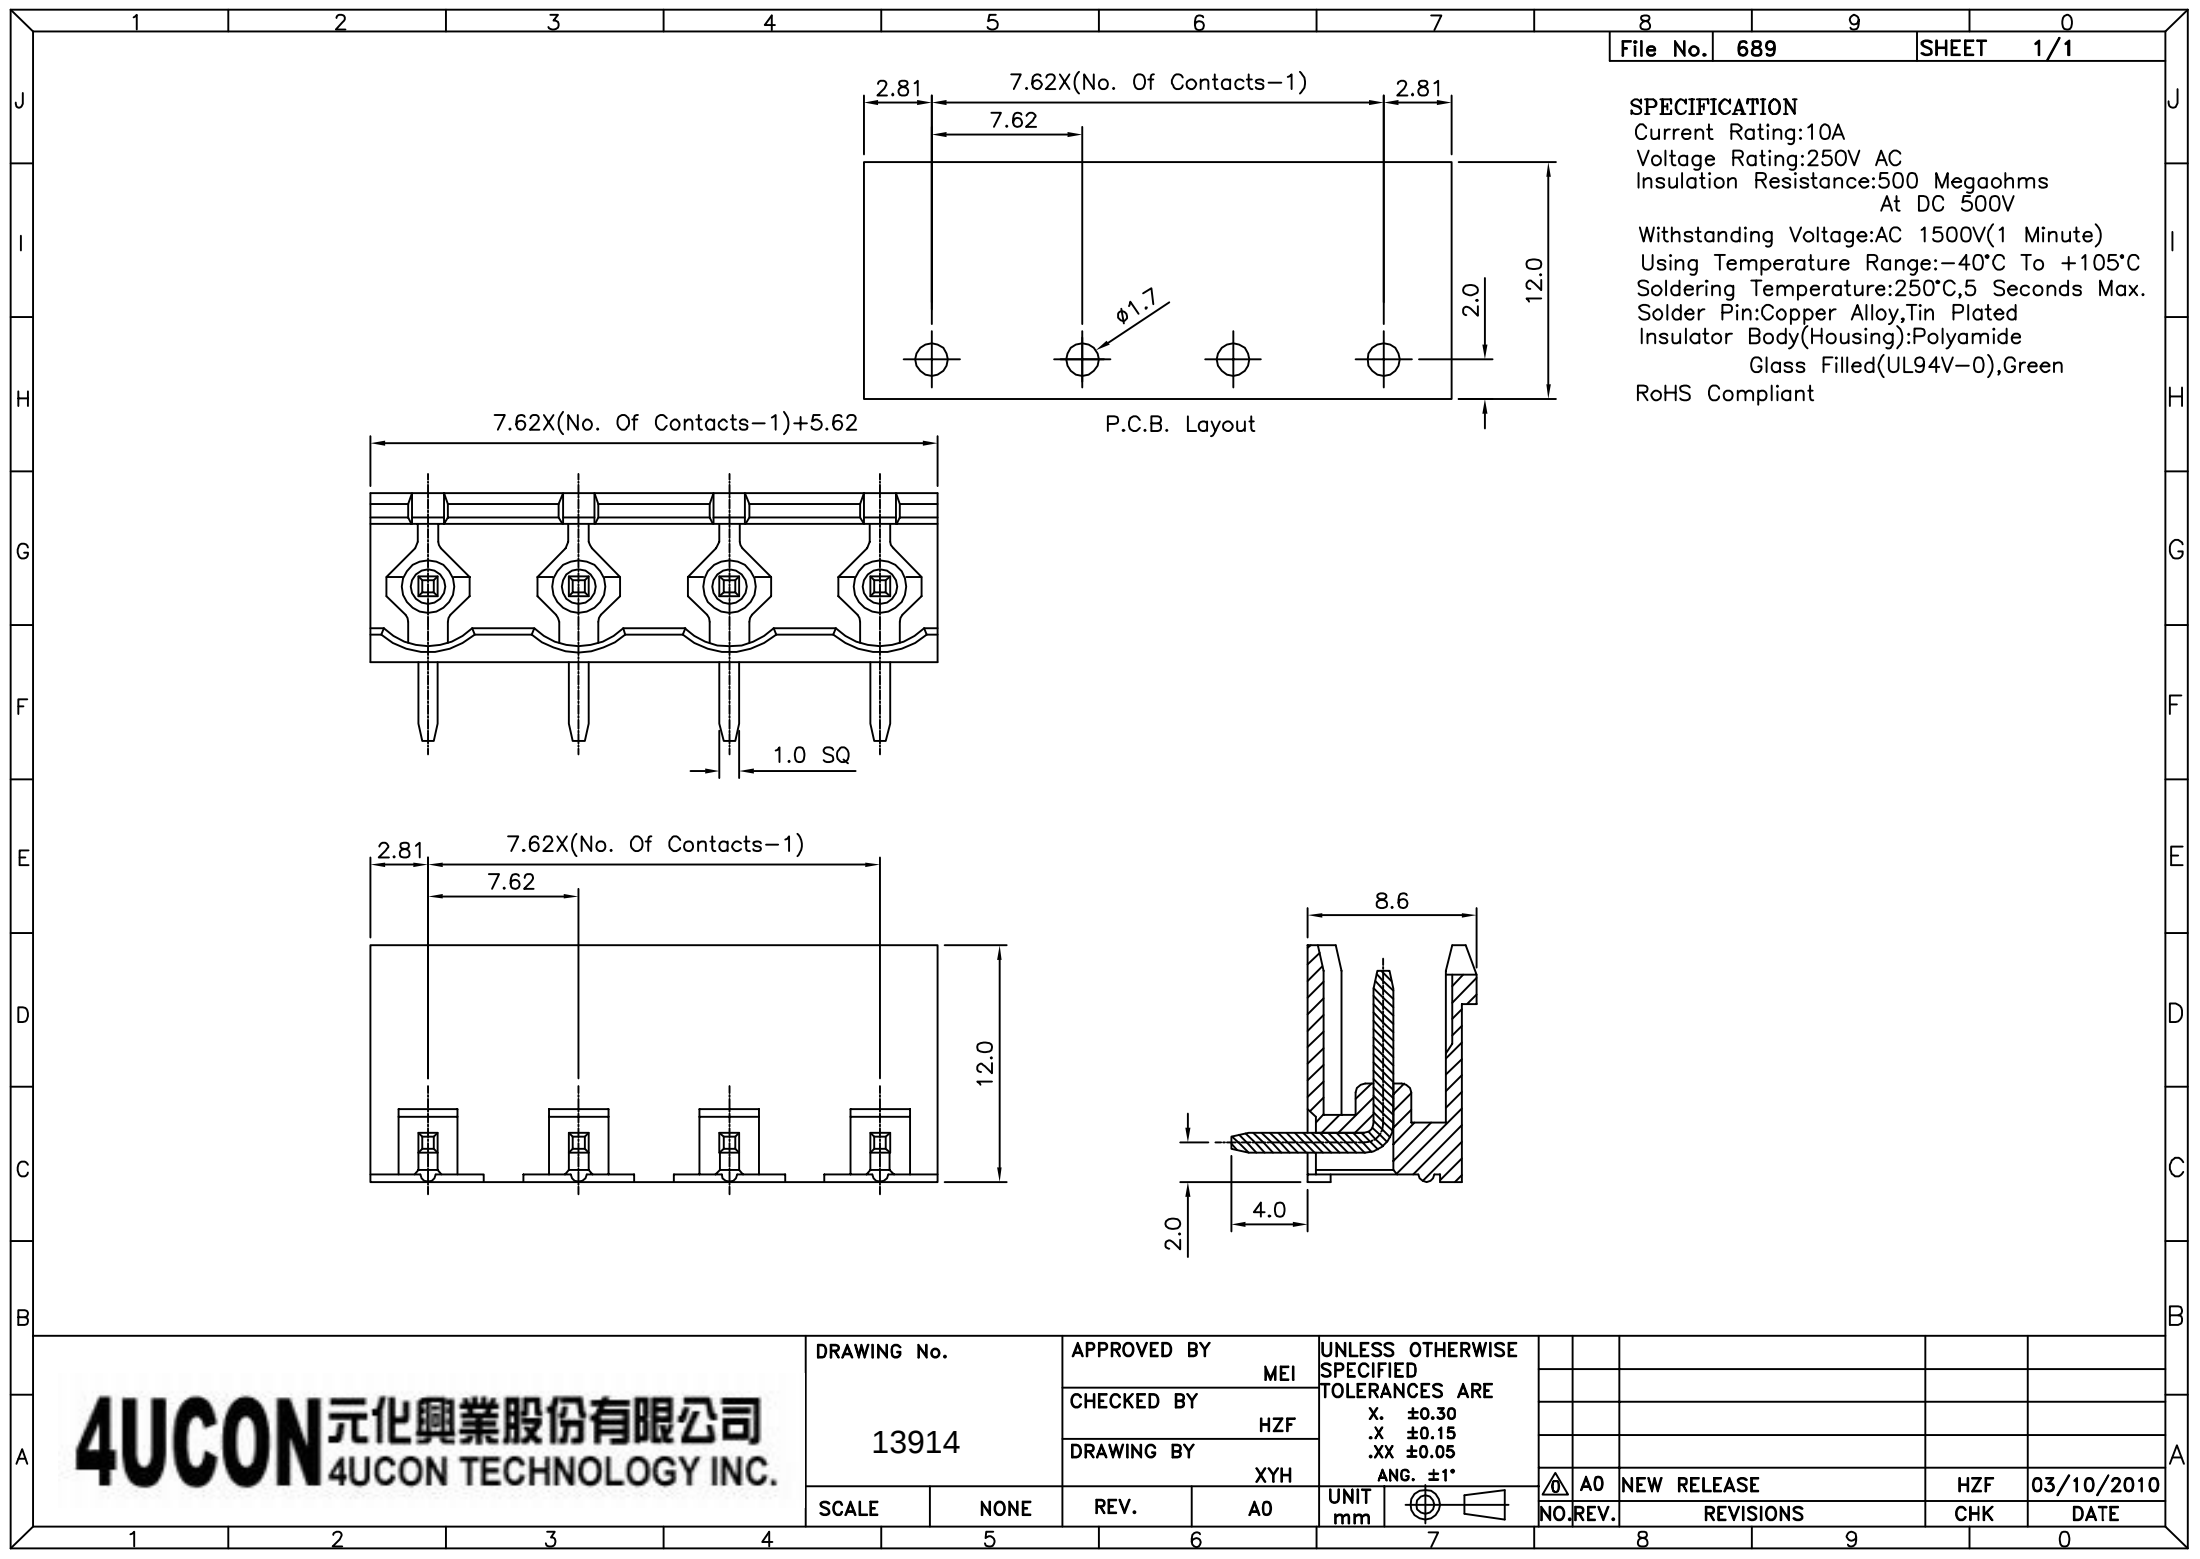

SPECIFICATION

Current Rating:10A
Voltage Rating:250V AC
Insulation Resistance:500 Megaohms
At DC 500V
Withstanding Voltage:AC 1500V(1 Minute)
Using Temperature Range:-40°C To +105°C
Soldering Temperature:250°C,5 Seconds Max.
Solder Pin:Copper Alloy,Tin Plated
Insulator Body(Housing):Polyamide
Glass Filled(UL94V-0),Green
RoHS Compliant

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

13914

SCALE

NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

XYH

REV.

A0

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

X. ± 0.30

.X ± 0.15

.XX ± 0.05

ANG. $\pm 1^\circ$

UNIT
mm



NO. REV.

A0 NEW RELEASE

REVISIONS

CHK

03/10/2010

DATE