

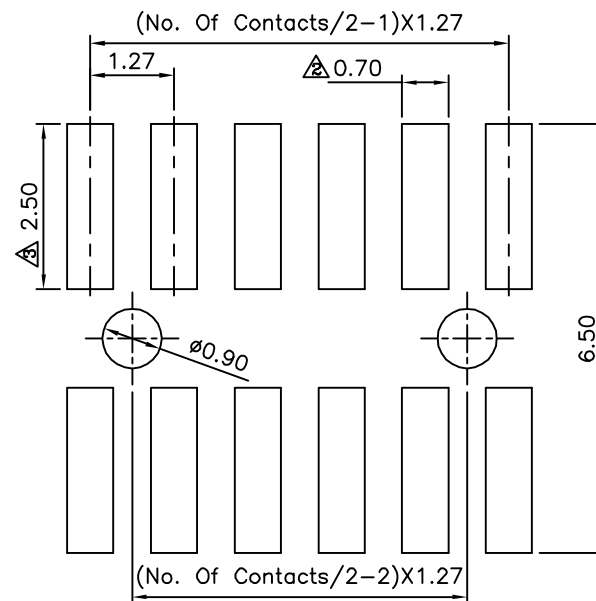
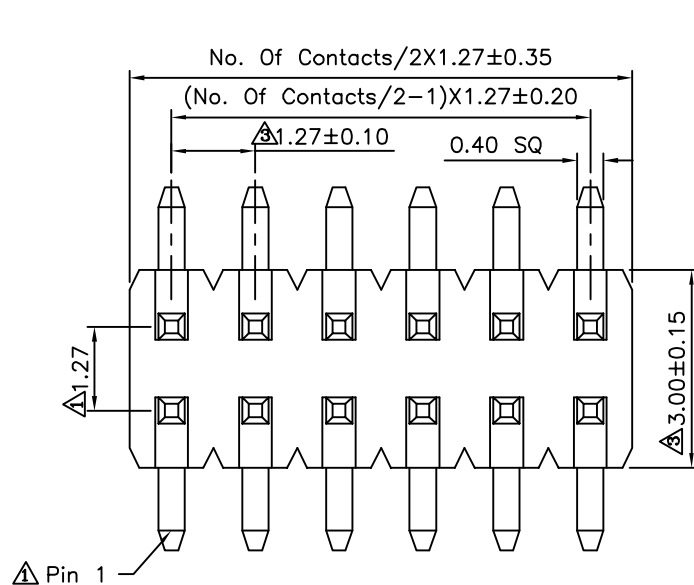


### △ SPECIFICATION

- △ Current:1A
- Withstanding Voltage:1000V AC Minute
- Contact Resistance:20 Milliohms Max.
- Insulation Resistance:5000 Megaohms Min.
- Operation Temperature:-55°C~+105°C
- Housing:PA6T(UL94V-0),Black
- Contact:Brass,Gold Flash Over Nickel
- △ No. Of Contacts:06~100 Contacts
- RoHS Compliant

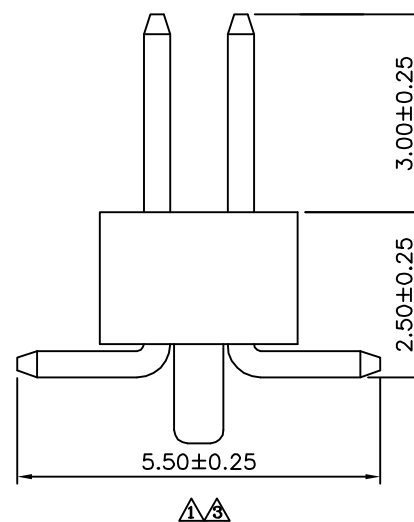

△ Recommended P.C.B. Layout

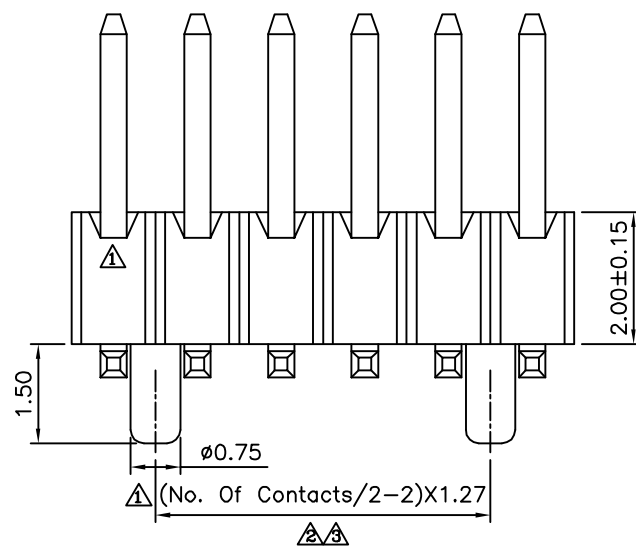

**4UCON** 元化興業股份有限公司  
4UCON TECHNOLOGY INC.

DRAWING No.

14011

SCALE

NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

YBL

REV.

A3

UNLESS OTHERWISE  
SPECIFIED  
TOLERANCES ARE  
.X  $\pm 0.38$   
.XX  $\pm 0.25$   
ANG.  $\pm 5^\circ$

UNIT  
mm



|                                                                                       |     |             |      |            |
|---------------------------------------------------------------------------------------|-----|-------------|------|------------|
|                                                                                       |     |             |      |            |
|  | A3  | Modify Data | HZF  | 11/29/2013 |
|  | A2  | Modify Data | HZF  | 01/03/2011 |
|  | A1  | Modify Data | HZF  | 07/02/2009 |
|  | A0  | NEW RELEASE | SHIN | 08/14/2006 |
| NO                                                                                    | REV | REVISIONS   | CHK  | DATE       |