


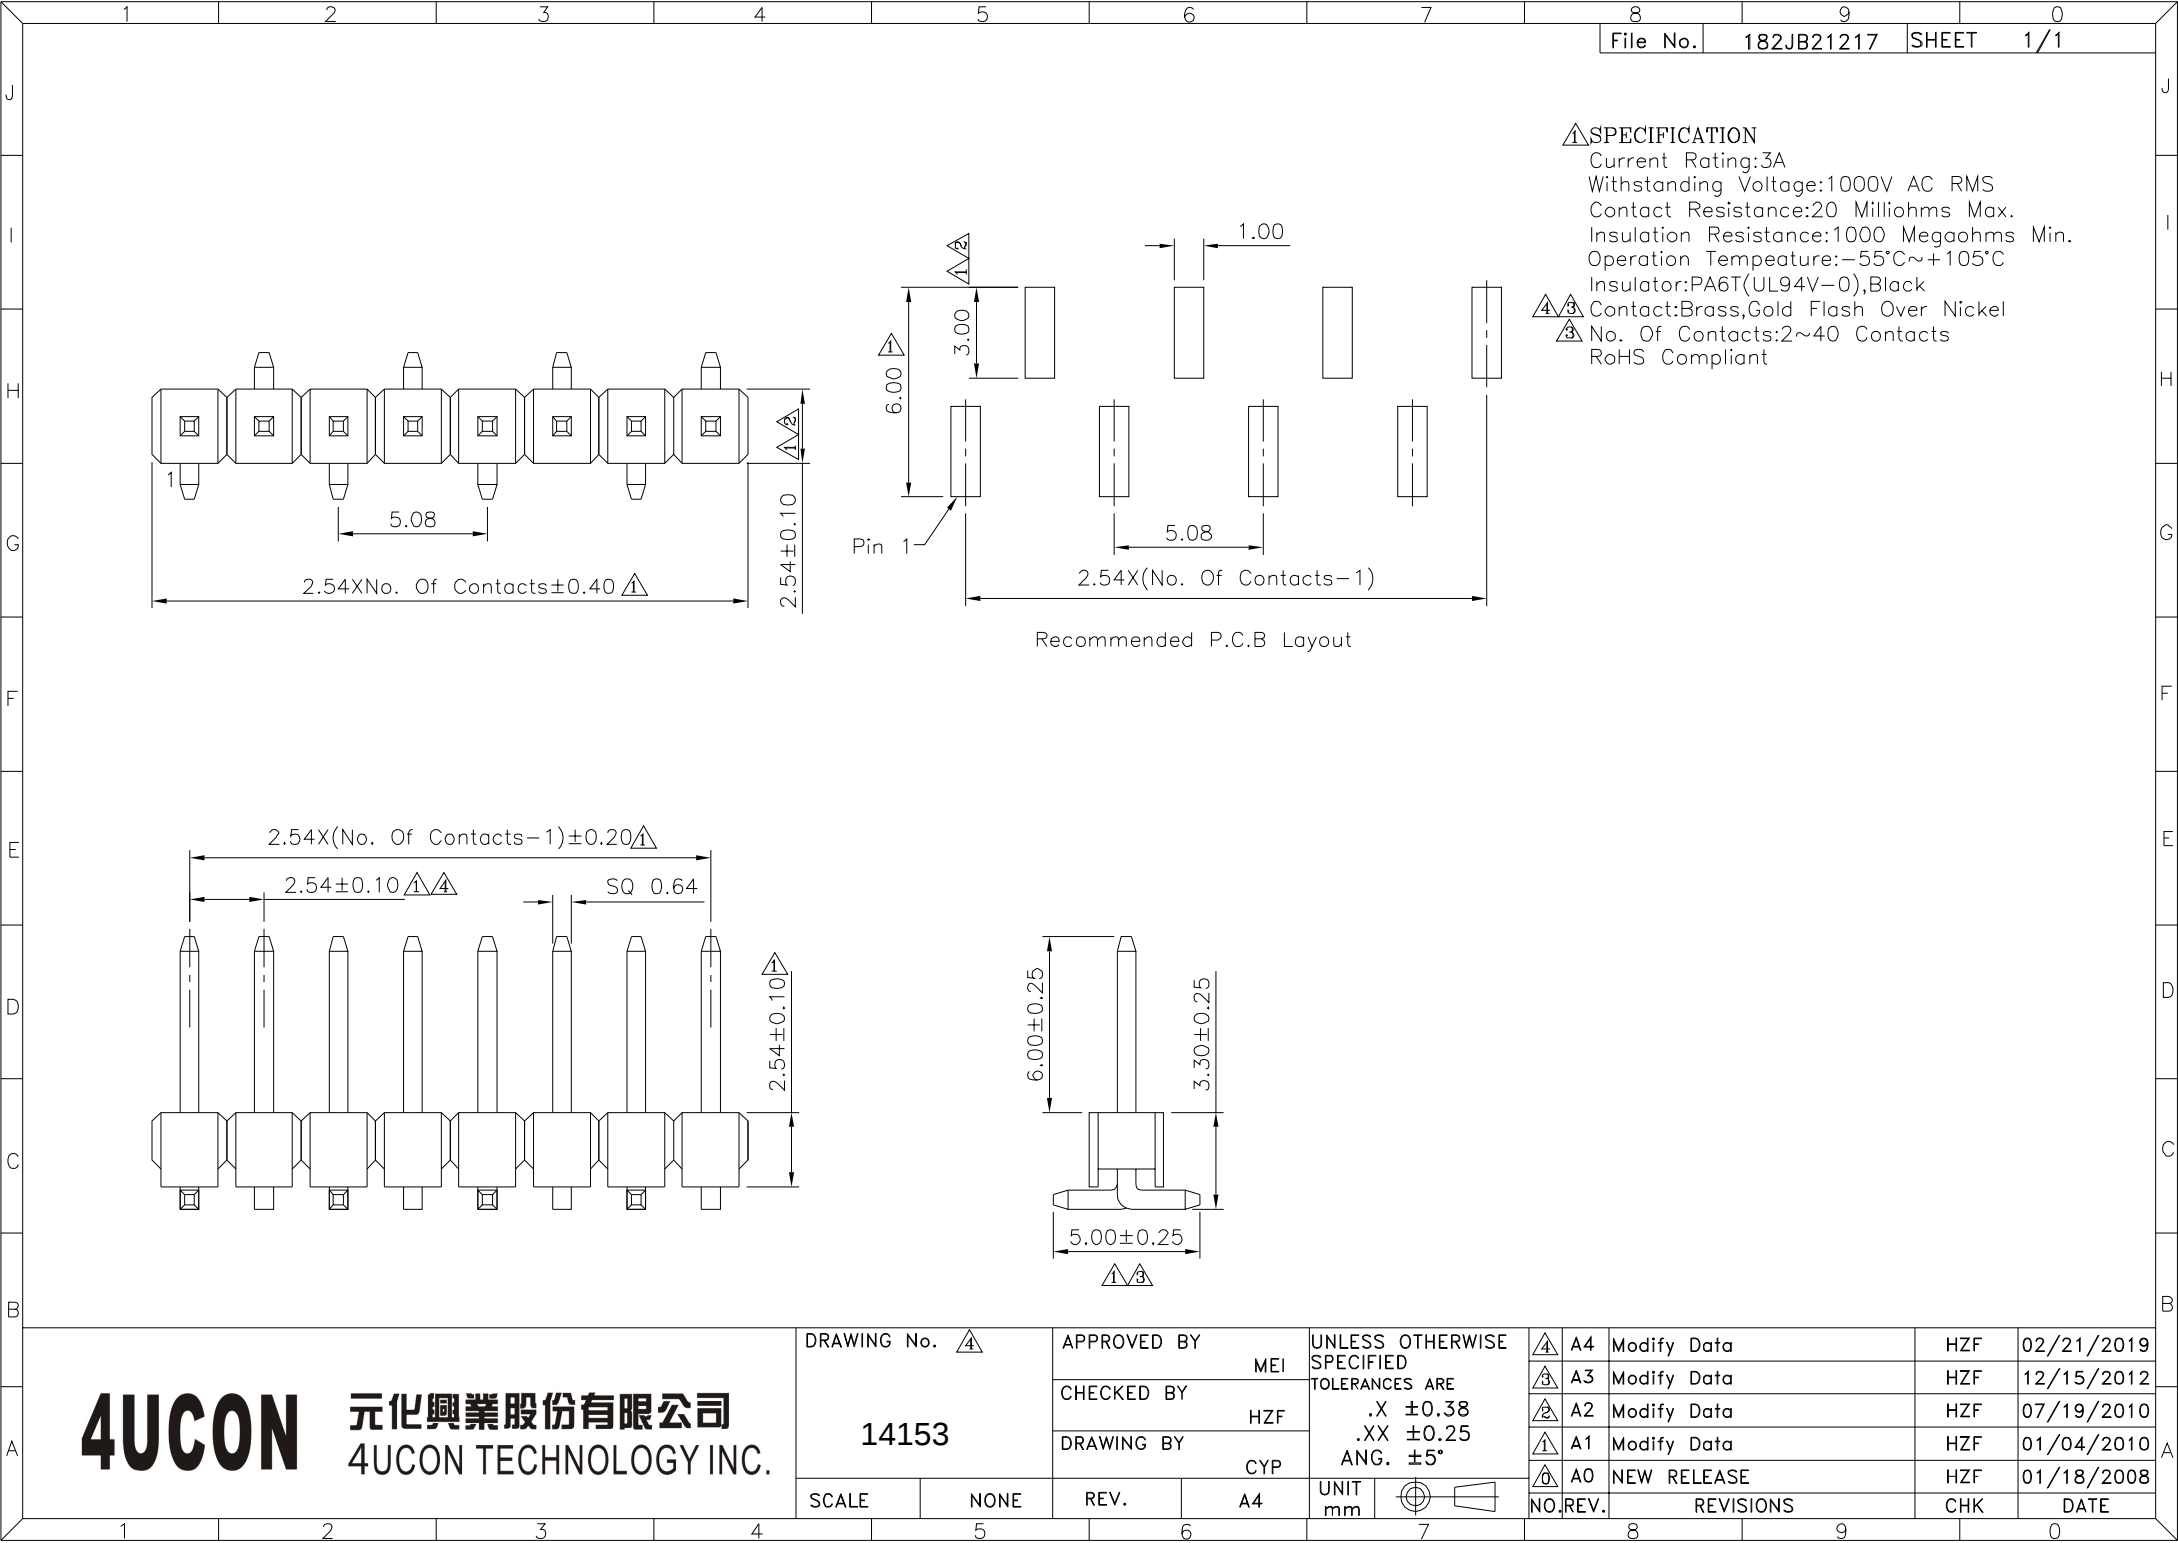

△ SPECIFICATION
Current Rating:3A
Withstanding Voltage:1000V AC RMS
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:-55°C~+105°C
Insulator:PA6T(UL94V-0),Black
△△ Contact:Brass,Gold Flash Over Nickel
△ No. Of Contacts:2~40 Contacts
RoHS Compliant

4Ucon 元化興業股份有限公司
4Ucon TECHNOLOGY INC.

DRAWING No. △ 14153		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.38 .XX ±0.25 ANG. ±5°		△ A4	Modify Data	HZF	02/21/2019
		MEI				△ A3	Modify Data	HZF	12/15/2012
		CHECKED BY				△ A2	Modify Data	HZF	07/19/2010
		HZF				△ A1	Modify Data	HZF	01/04/2010
		DRAWING BY		CYP		△ A0	NEW RELEASE	HZF	01/18/2008
SCALE	NONE	REV.	A4	UNIT mm		NO. REV.	REVISIONS	CHK	DATE