

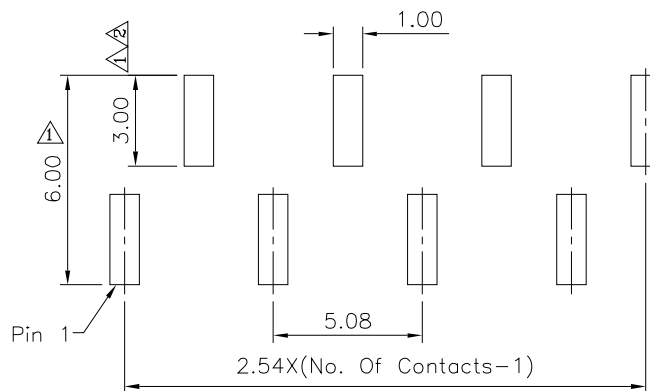
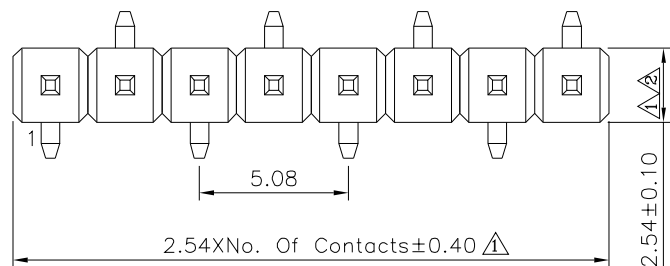


# △ SPECIFICATION

Current Rating:3A  
 Withstanding Voltage:1000V AC RMS  
 Contact Resistance:20 Milliohms Max.  
 Insulation Resistance:1000 Megaohms Min.  
 Operation Temperature:-55°C~+105°C  
 Insulator:PA6T(UL94V-0),Black  
 △△ Contact:Brass,Gold Flash Over Nickel  
 △ No. Of Contacts:2~40 Contacts  
 RoHS Compliant

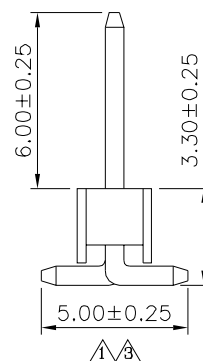

Recommended P.C.B Layout

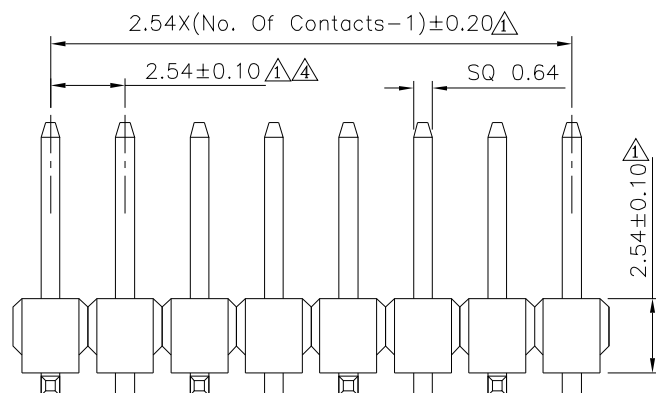

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No. △

14157

SCALE NONE

APPROVED BY MEI

CHECKED BY HZF

DRAWING BY CYP

REV. A4

UNLESS OTHERWISE SPECIFIED  
 TOLERANCES ARE  
 .X ±0.38  
 .XX ±0.25  
 ANG. ±5°

UNIT mm

|          |             |     |            |
|----------|-------------|-----|------------|
| △ A4     | Modify Data | HZF | 02/21/2019 |
| △ A3     | Modify Data | HZF | 12/15/2012 |
| △ A2     | Modify Data | HZF | 07/19/2010 |
| △ A1     | Modify Data | HZF | 01/04/2010 |
| △ A0     | NEW RELEASE | HZF | 01/18/2008 |
| NO. REV. | REVISIONS   | CHK | DATE       |