


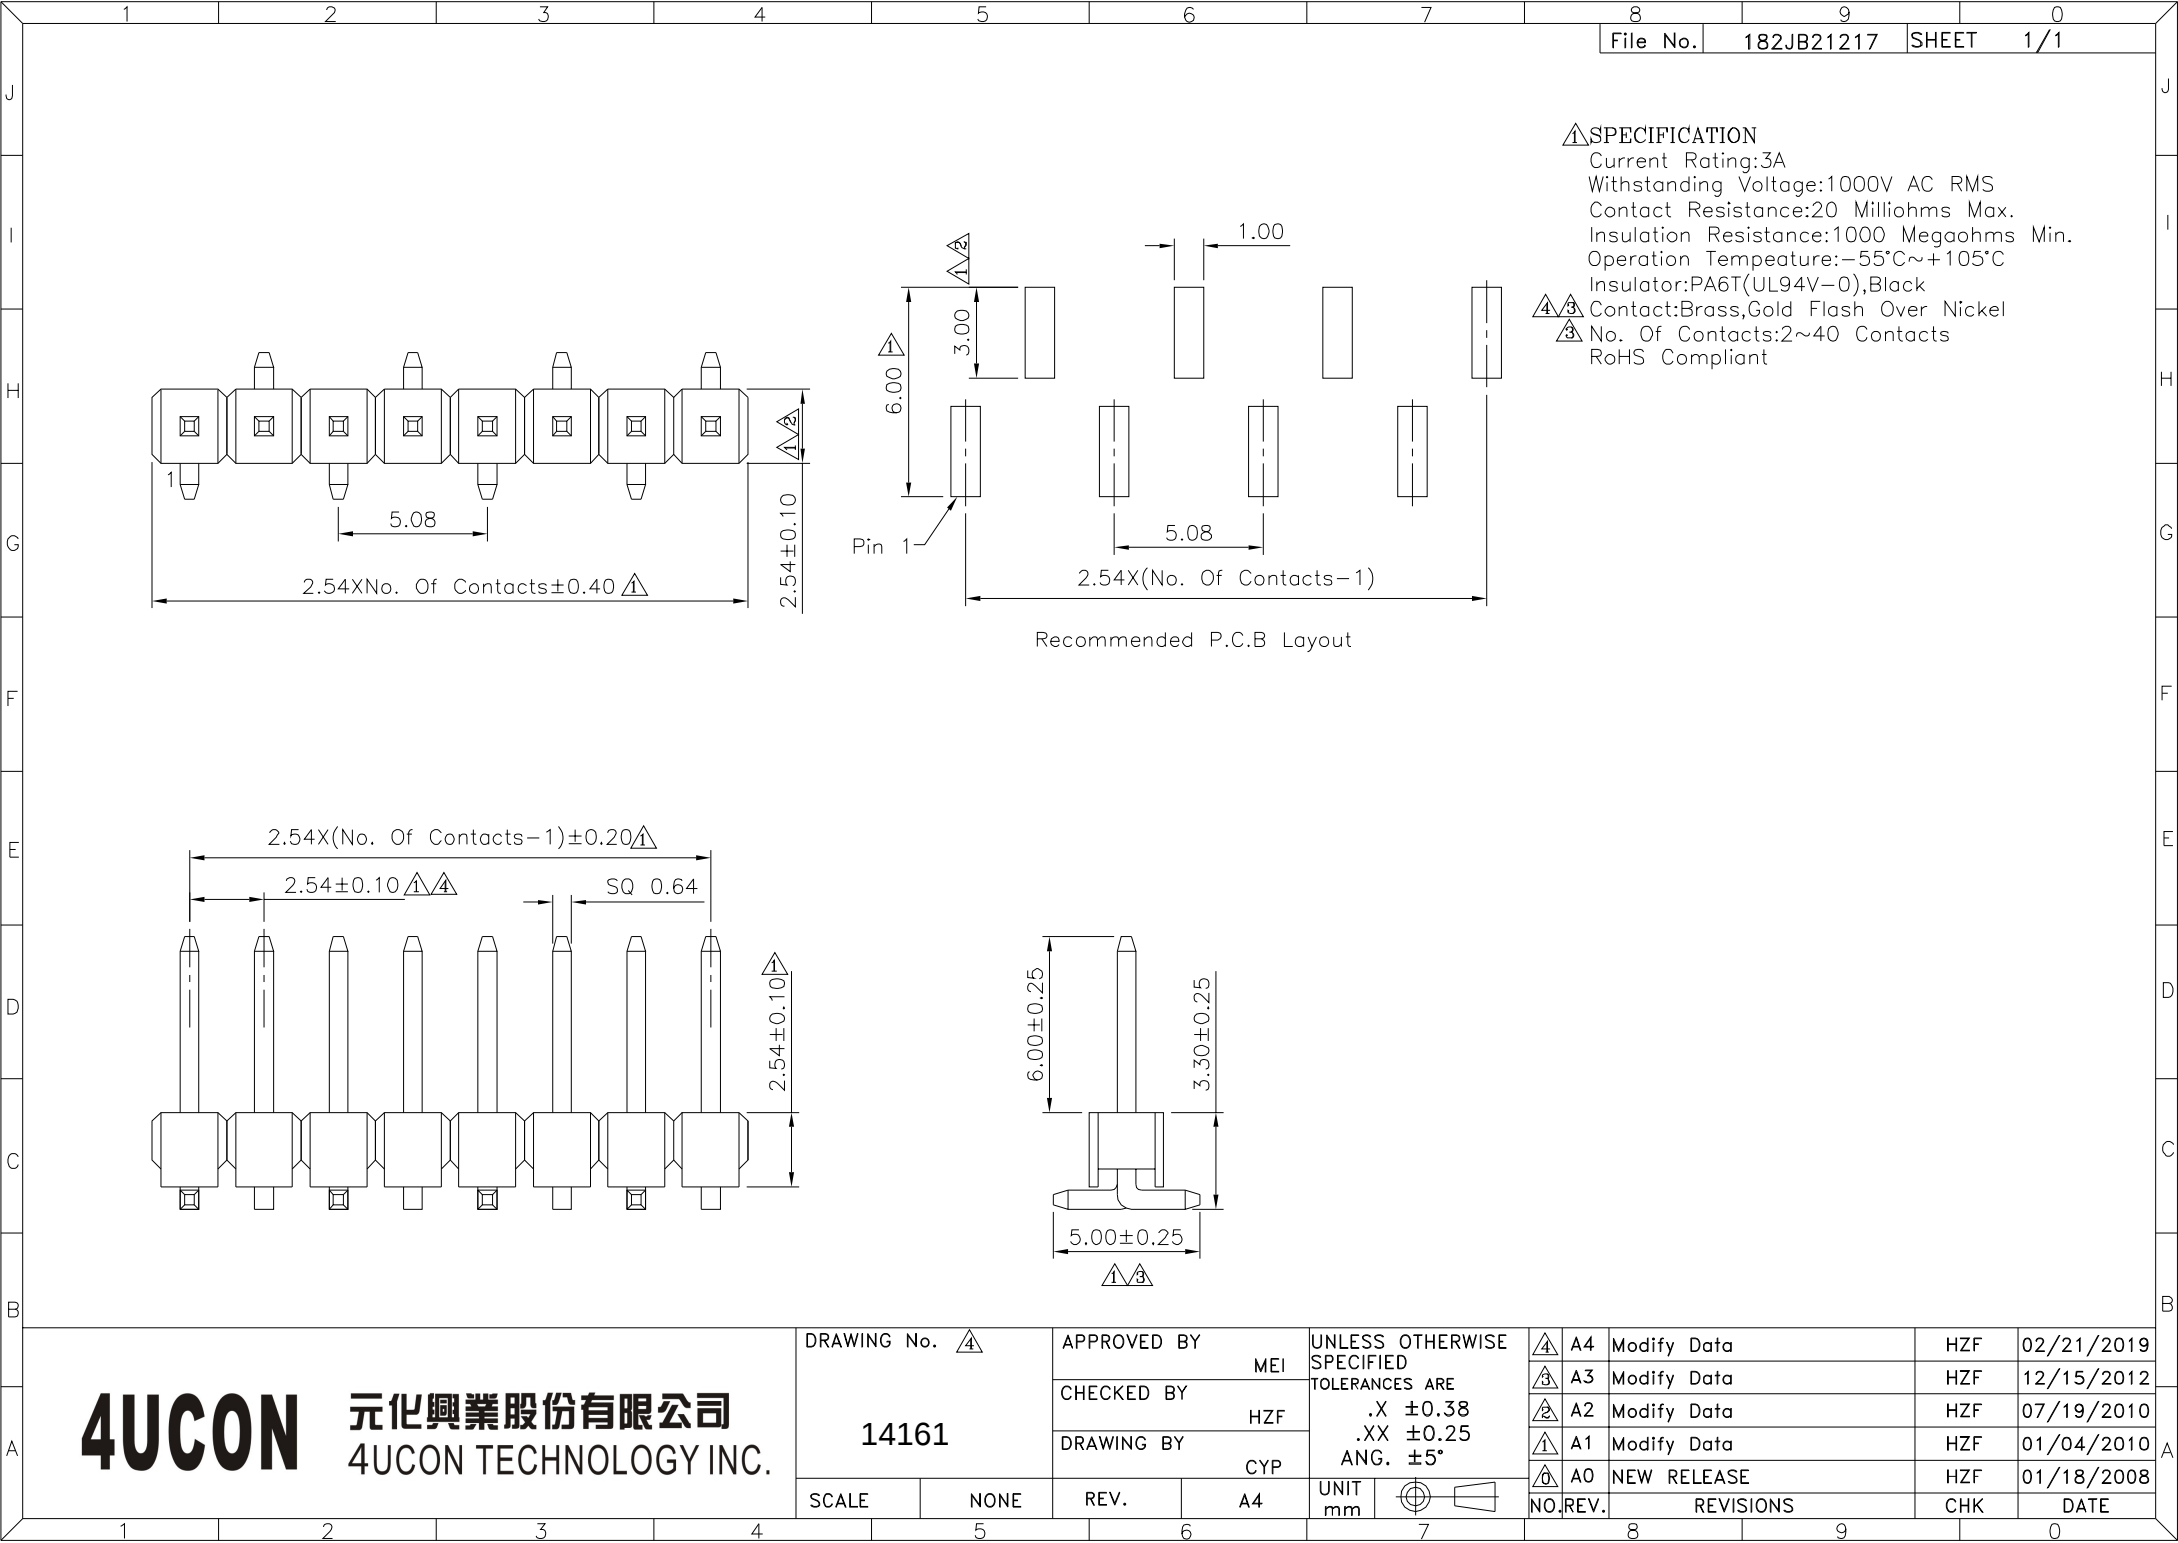

△ SPECIFICATION

Current Rating:3A
Withstanding Voltage:1000V AC RMS
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:-55°C~+105°C
Insulator:PA6T(UL94V-0),Black
△△ Contact:Brass,Gold Flash Over Nickel
△ No. Of Contacts:2~40 Contacts
RoHS Compliant

4Ucon 元化興業股份有限公司
4Ucon TECHNOLOGY INC.

DRAWING No. △

14161

APPROVED BY MEI

CHECKED BY HZF

DRAWING BY CYP

SCALE NONE

REV.

A4

UNLESS OTHERWISE

SPECIFIED

TOLERANCES ARE


.X ± 0.38

.XX ± 0.25

ANG. $\pm 5^\circ$

UNIT

mm



△ A4

Modify Data

HZF

02/21/2019

△ A3

Modify Data

HZF

12/15/2012

△ A2

Modify Data

HZF

07/19/2010

△ A1

Modify Data

HZF

01/04/2010

△ A0

NEW RELEASE

HZF

01/18/2008

NO. REV.

REVISIONS

CHK

DATE