

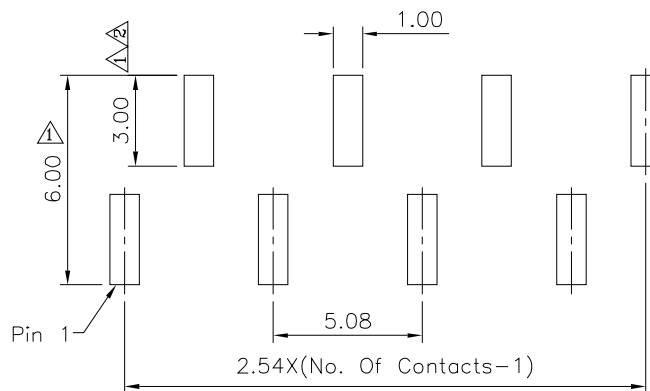
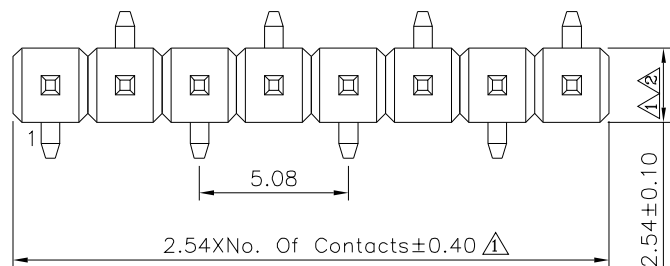


△ SPECIFICATION

Current Rating:3A
 Withstanding Voltage:1000V AC RMS
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Operation Temperature:-55°C~+105°C
 Insulator:PA6T(UL94V-0),Black
 △△ Contact:Brass,Gold Flash Over Nickel
 △ No. Of Contacts:2~40 Contacts
 RoHS Compliant

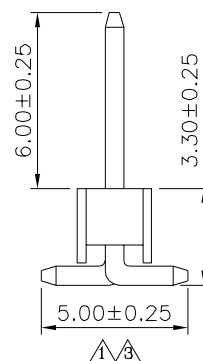

Recommended P.C.B Layout

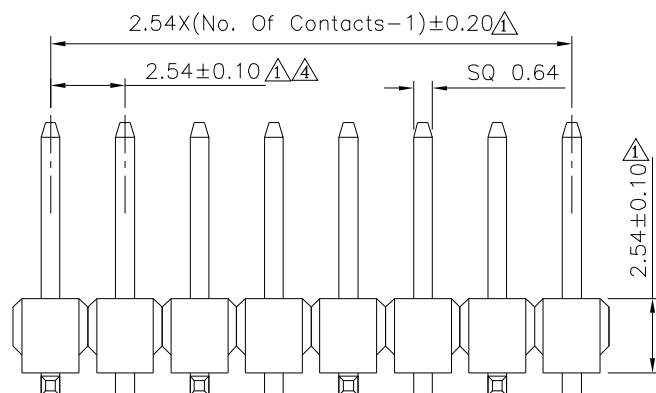

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No. △

14178

SCALE NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

CYP


REV.

A4

UNLESS OTHERWISE SPECIFIED

TOLERANCES ARE
 .X ±0.38
 .XX ±0.25
 ANG. ±5°

UNIT
 mm



△ A4	Modify Data	HZF	02/21/2019
△ A3	Modify Data	HZF	12/15/2012
△ A2	Modify Data	HZF	07/19/2010
△ A1	Modify Data	HZF	01/04/2010
△ A0	NEW RELEASE	HZF	01/18/2008
NO. REV.	REVISIONS	CHK	DATE