



△ SPECIFICATION

Voltage Rating:300V AC
Current Rating:16 Amps/Way Max.
Contact Resistance:20 Milliohms Max.
Withstanding Voltage:2500V AC(1 Minute)
Test Time=60 Sec/PCS


- Wire Range:12~30AWG
- △ Torque:4.5 kgf.cm/M3
- Operation Temperature:-40°C~+105°C
- Soldering Reliability:250°C±10°C/5 Seconds Max.
- △ Contact(Metal Housing):Copper Alloy,Nickel Plated
- Terminal Screw:Steel,Galvanized With Cr3+ Plated
- Solder Pin:Copper Alloy,Tin Plated
- △ Insulator Body(Housing):Polyamide(UL94V-0),Green
- RoHS Compliant
- *2~24P Available~

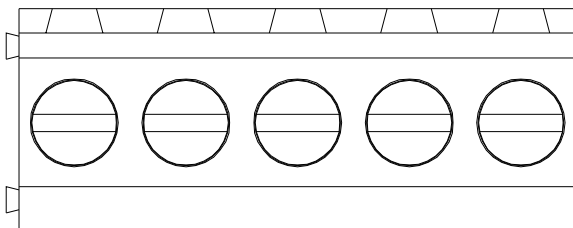


△

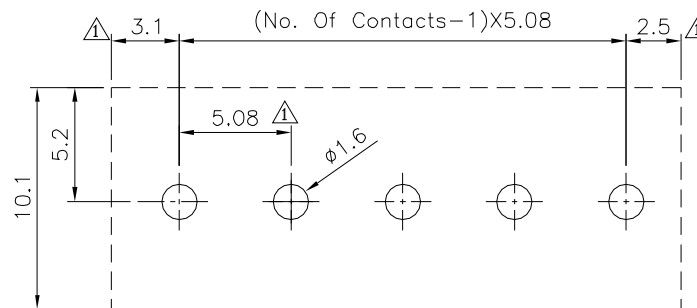

Recommended P.C.B. Layout

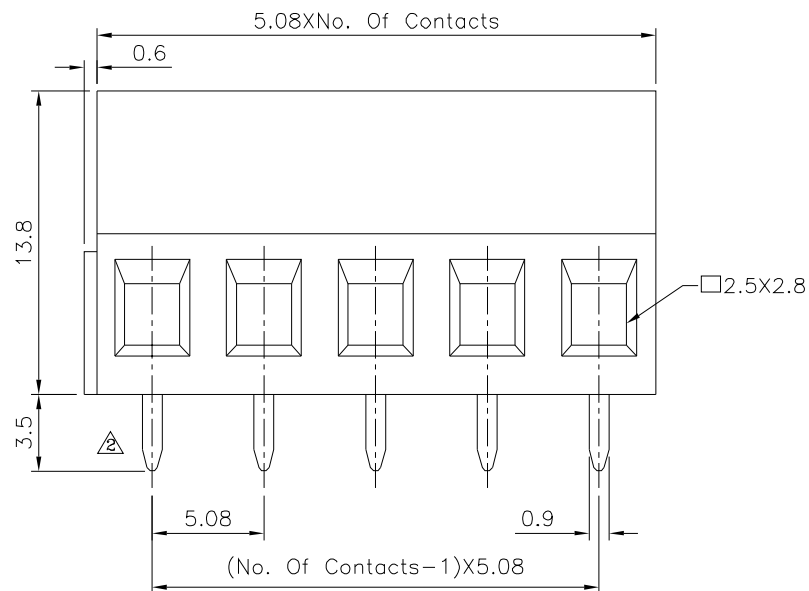

△

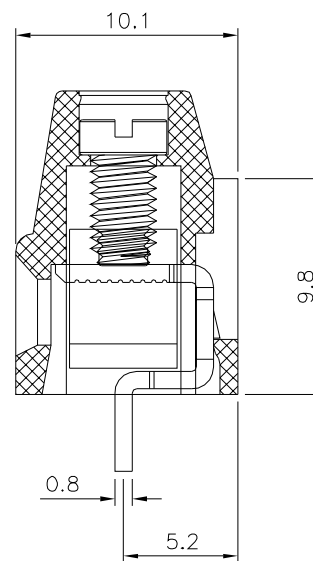

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. △

14304

APPROVED BY

MEI

CHECKED BY


HZF

DRAWING BY

CYP

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
X. ±0.50
.X ±0.30
.XX ±0.20
X.* ±1"

UNIT
mm



△ A4	Modify Data	HZF	07/16/2021
△ A3	Modify Spec.	HZF	05/31/2017
△ A2	Modify Data	HZF	08/26/2013
△ A1	Modify Data	HZF	08/26/2011
△ A0	NEW RELEASE	HZF	05/24/2010
NO. REV.	REVISIONS	CHK	DATE