



△ SPECIFICATION

Voltage Rating:300V AC
Current Rating:16 Amps/Way Max.
Contact Resistance:20 Milliohms Max.
Withstanding Voltage:2500V AC(1 Minute)
Test Time=60 Sec/PCS


- Wire Range:12~30AWG
- △ Torque:4.5 kgf.cm/M3
- Operation Temperature:-40°C~+105°C
- Soldering Reliability:250°C±10°C/5 Seconds Max.
- △ Contact(Metal Housing):Copper Alloy,Nickel Plated
- Terminal Screw:Steel,Galvanized With Cr3+ Plated
- Solder Pin:Copper Alloy,Tin Plated
- △ Insulator Body(Housing):Polyamide(UL94V-0),Green
- RoHS Compliant
- *2~24P Available~

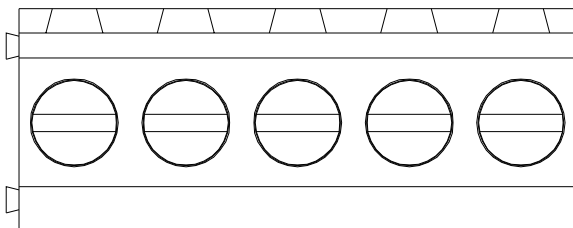


△

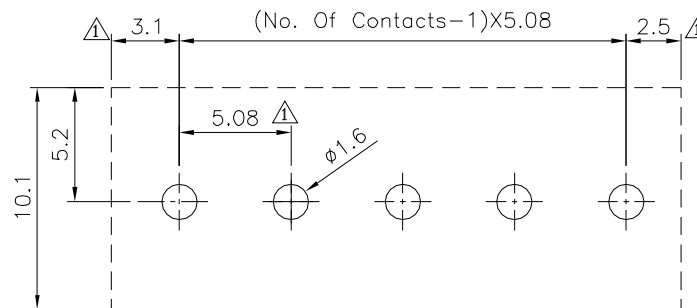

Recommended P.C.B. Layout

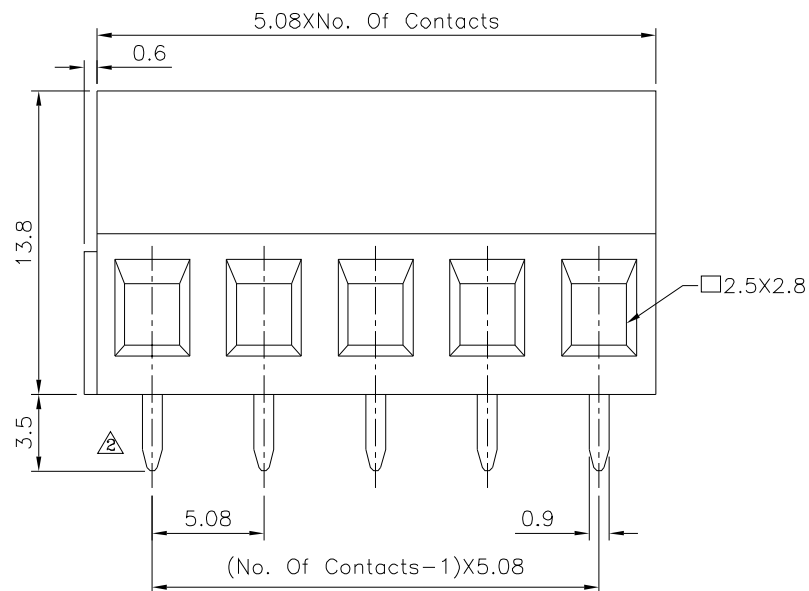

△

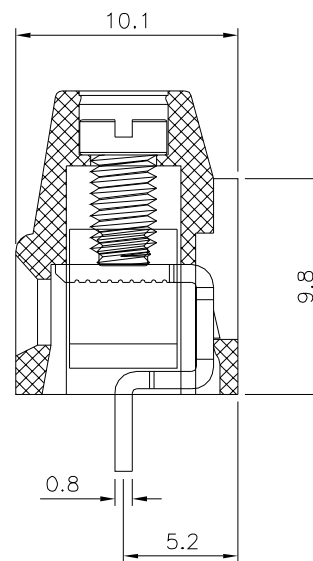

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. △

14305

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

CYP

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
X. ±0.50
.X ±0.30
.XX ±0.20
X.* ±1"

SCALE


NONE

REV.

A4

UNIT

mm



△ A4

Modify Data

HZF

07/16/2021

△ A3

Modify Spec.

HZF

05/31/2017

△ A2

Modify Data

HZF

08/26/2013

△ A1

Modify Data

HZF

08/26/2011

△ A0

NEW RELEASE

HZF

05/24/2010

NO. REV.

REVISIONS

CHK

DATE