

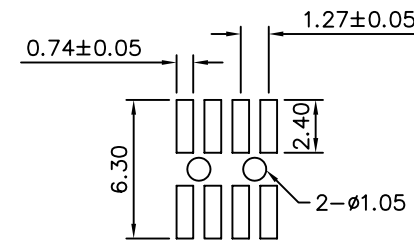
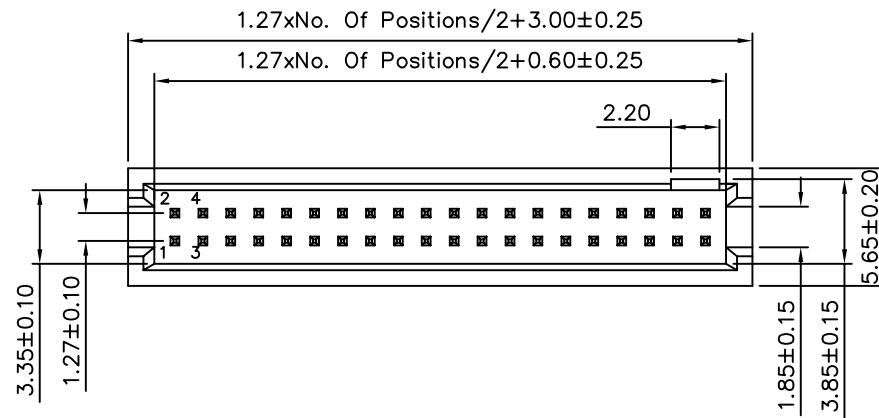


SPECIFICATIONS

Current Rating: 1 Amp
 Insulator Resistance: 1000 Megohms Min.
 Contact Resistance: 20 Milliohms Max.
 Dielectric Withstanding: AC 500V/Minute
 Operating Temperature: -40°C To +105°C
 Contact: Brass, Gold Flash Over All
 Insulator: Polyester PA6T+30%GF, UL 94V-0

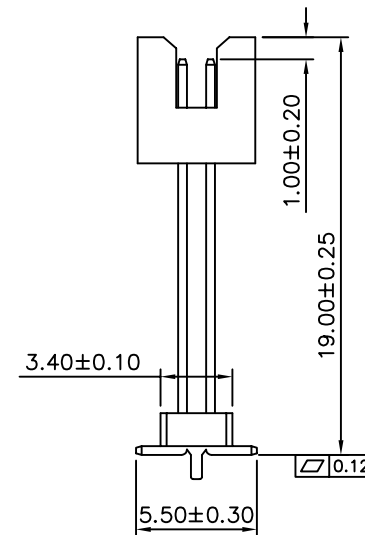

Recommended P.C.Board Layout

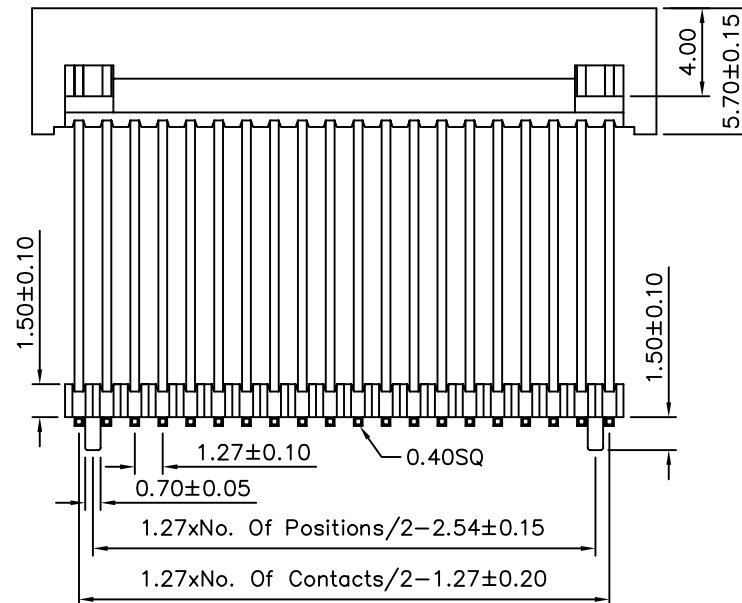

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

14746

APPROVED BY

MEI

CHECKED BY

BECKY

DRAWING BY

HZF

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE

.X ± 0.38 .X* $\pm 5^\circ$
 .XX ± 0.25 .XX* $\pm 1^\circ$
 .XXX ± 0.12 .XXX* $\pm 0.5^\circ$

SCALE

NONE

REV.

A1

UNIT

mm

NO. REV.

REVISIONS

CHK

DATE

BECKY

06/29/2006

BECKY

09/28/2005