

SPECIFICATION

Current Rating:3Amp

Contact Resistance:20Milliohms Max

Withstand Voltage:500V AC/DC

Insulation Resistance:1000Megohm Min


Operation Temperature:-40°C~+105°C

Contact Material:Brass

Contact Plating:Gold Plated Over Nickel




Insulator Material:PA6T+30%GF(UL94V-0)

RoHS Compliant

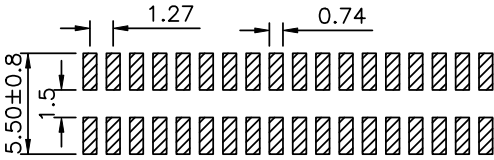

Recommended P.C.B Layout(Top Side)

(PCB Board Tolerance±0.05)

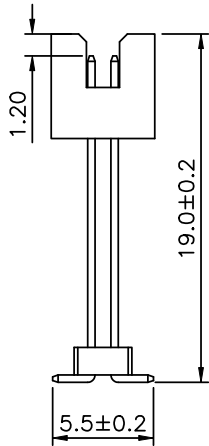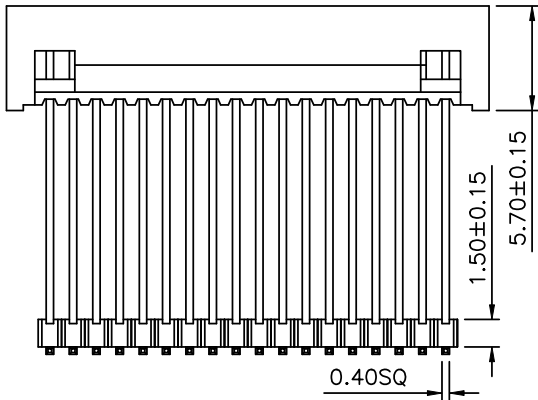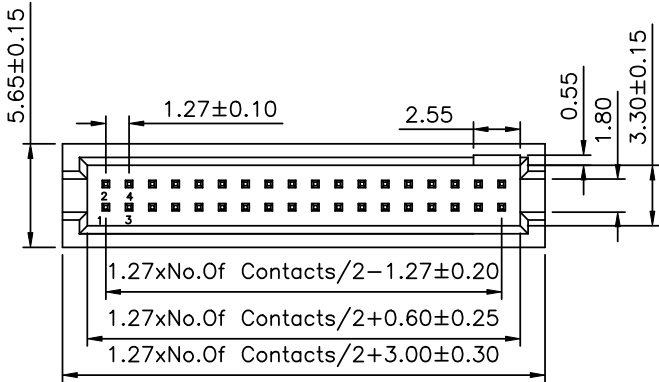

4UCON元化興業股份有限公司

4UCON TECHNOLOGY INC.

DRAWING No. 14791		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.40 .XX ±0.25 .XXX ±0.15 ANG: ±3°							
		MEI									
		CHECKED BY									
		HZF									
		DRAWING BY									
		JLT									
SCALE	NONE	REV.	A0	UNIT mm			A0	NEW RELEASE		HZF	12/27/2007
							NO. REV.	REVISIONS		CHK	DATE