


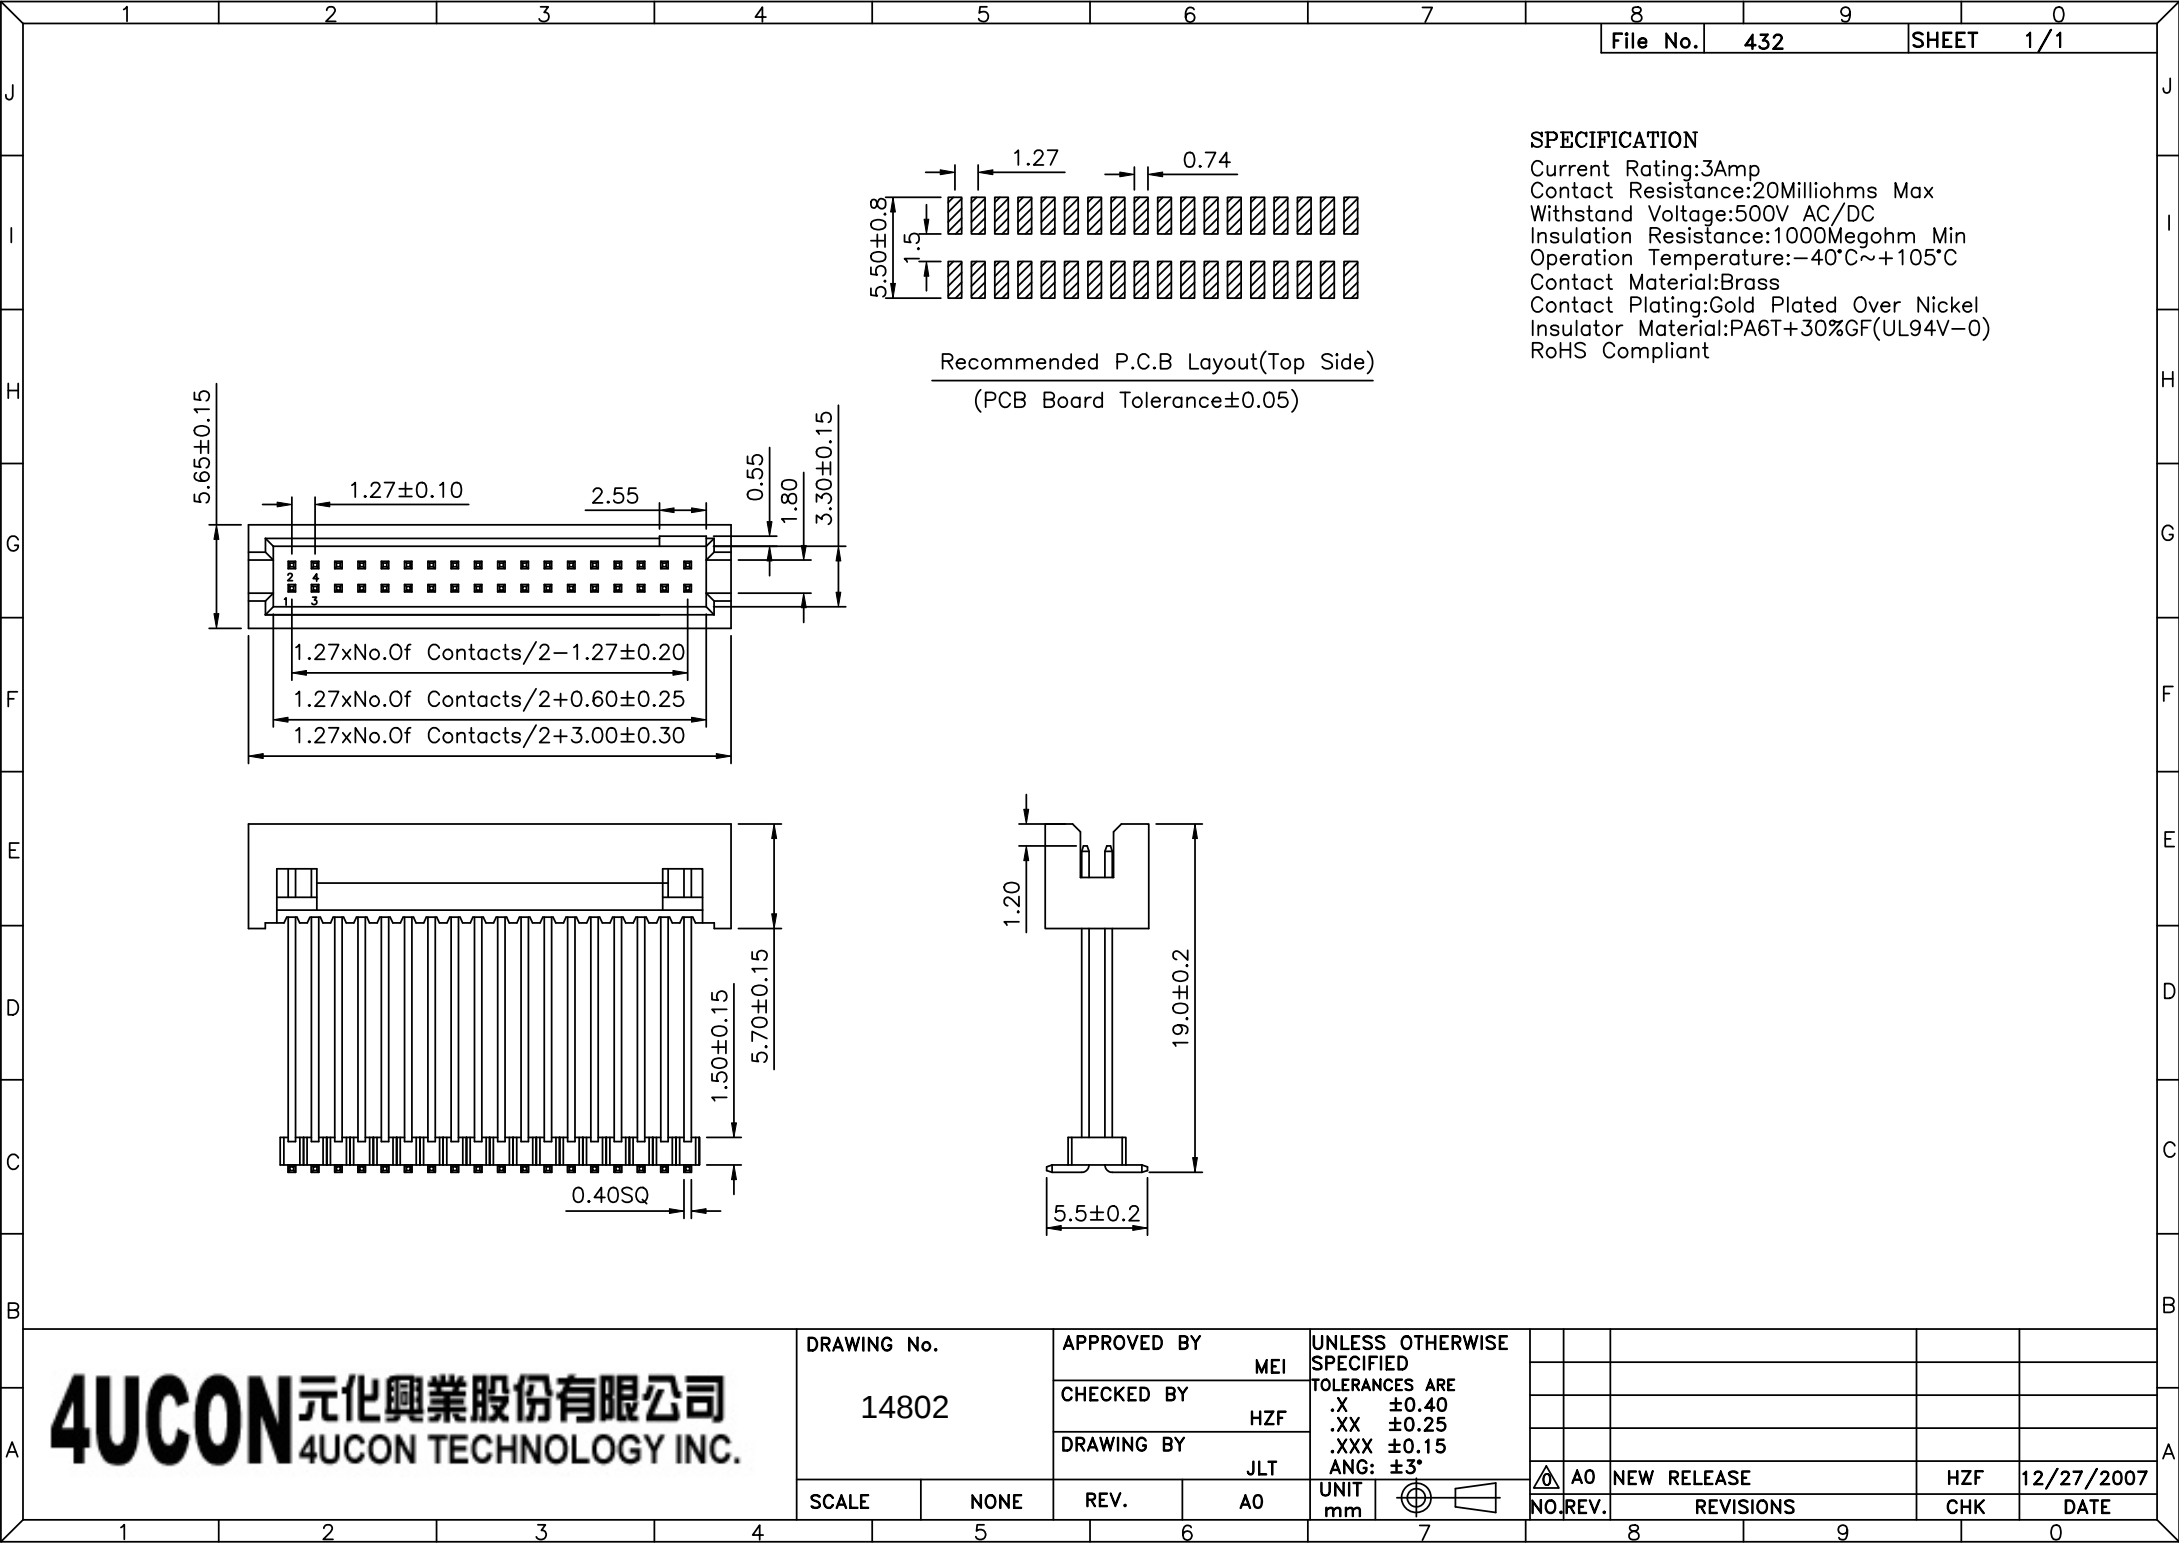

SPECIFICATION
Current Rating:3Amp
Contact Resistance:20Milliohms Max
Withstand Voltage:500V AC/DC
Insulation Resistance:1000Megohm Min
Operation Temperature:-40°C~+105°C
Contact Material:Brass
Contact Plating:Gold Plated Over Nickel
Insulator Material:PA6T+30%GF(UL94V-0)
RoHS Compliant

Recommended P.C.B Layout(Top Side)
(PCB Board Tolerance±0.05)

4UCON元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

14802

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

JLT

UNLESS OTHERWISE SPECIFIED

TOLERANCES ARE
.X ±0.40
.XX ±0.25
.XXX ±0.15
ANG: ±3°


SCALE

NONE

REV.

A0

UNIT
mm



NO.

REV.

A0 NEW RELEASE

REVISIONS

CHK

12/27/2007

DATE